
PostNL PHP bindings Documentation

Release v1.4.x

[Read the Docs](#)

Jun 15, 2023

CONTENTS

1	Developer Guide	3
1.1	Overview	3
1.1.1	Requirements	3
1.1.2	License	4
1.1.3	Contributing	4
1.2	Installation	5
1.2.1	Install through Composer	5
1.2.2	Install the latest development build through composer	6
1.3	Authentication	6
1.3.1	Passing all credentials	6
1.3.2	Authorization	9
1.4	Quickstart	10
1.4.1	Requesting timeframes, locations and the delivery date at once	10
1.4.2	Creating a (merged) shipment label	14
1.4.3	Tracking a shipment	19
1.5	Delivery options	19
1.5.1	Checkout	20
1.5.2	Deliverydate webservice	20
1.5.3	Timeframe webservice	21
1.5.4	Location webservice	22
1.6	Send and track shipments	24
1.6.1	Barcode webservice	24
1.6.2	Labelling webservice	25
1.6.3	Shipping webservice	29
1.6.4	Confirming webservice	32
1.6.5	Shippingstatus webservice	33
1.7	Exception handling	36
1.7.1	Exception types	37
1.8	Formats	39
1.8.1	Dates, Times and DateTimes	39
1.8.2	SOAP object structure	40
1.9	HTTP Client	40
1.9.1	Setting the HTTP client manually	40
1.9.2	Setting the HTTP client with HTTPPlug	40
1.10	Logging	41
1.11	Advanced usage	42
1.11.1	Object instantiation	42
1.11.2	Building requests manually	44
1.12	API Reference	45
1.12.1	Namespaces	45
1.12.2	Classes	355
1.13	Authors	397
1.13.1	Maintainers:	397
1.13.2	Contributors:	397

PHP Namespace Index	399
Index	401

These PHP API bindings aim to make it easier to connect to PostNL's CIF API, used for displaying delivery options, printing shipment labels and retrieving actual shipment statuses.

- The goal is to have a simple interface for connecting with either the SOAP or REST API, while still being able to follow [the official API documentation](#).
- Abstracts away direct requests to the API, allowing you to focus on the code itself. The object structure *is based on the SOAP API*.
- Can merge PDF labels (both A6 and A4) and automatically handles concurrent requests when necessary, making batch processing a lot easier.
- Follows PHP standards, some of them are:
 - PSR-3 logging. You can log the requests and responses for debugging purposes. More info on the page [Logging](#).
 - PSR-7 interfaces for requests and responses. Build and process functions are provided for every service so you can create your own mix of batch requests. See the [Firstred\PostNL\PostNL::getTimeframesAndNearestLocations](#) method for an example.
 - PSR-18 HTTP Clients or HTTPPlug clients.
- Framework agnostic. You can use this library with any framework.
- A custom HTTP client interface so you can use the HTTP client of your choice. Using the [Guzzle](#) or [Symfony HTTP client](#) is strongly recommended. Any HTTPPlug client can be used by installing the related packages. See the [HTTP Client](#) chapter for more information.

```
<?php

use Firstred\PostNL\Entity\Timeframe;
use Firstred\PostNL\Entity\Request\GetTimeframes;

$postnl = new PostNL(...);
$timeframes = $postnl->getTimeframes(
    (new GetTimeframes())
        ->setTimeframe([(new Timeframe())
            ->setCountryCode('NL')
            ->setStartDate(date('d-m-Y', strtotime('+1 day'))))
            ->setEndDate(date('d-m-Y', strtotime('+14 days'))))
            ->setHouseNr(42)
            ->setPostalCode('2132WT')
            ->setSundaySorting(true)
            ->setOptions(['Daytime', 'Evening'])
        ])
);
var_dump($timeframes);
```


DEVELOPER GUIDE

1.1 Overview

1.1.1 Requirements

Nowadays there are two APIs you can choose from: SOAP or REST. PostNL's REST API provides all of the functionality and is currently the recommended way to connect.

REST API Requirements

1. PHP 5.6 or higher (up to and including 8.2)
2. [JSON extension](#)
3. An HTTP Client such as [Symfony's HTTP Client](#) (PostNL lib v1.3.0 or higher) or [Guzzle](#) (or at least have the [PHP cURL extension](#) installed)
4. `opcache.save_comments` set to 1

SOAP API Requirements

1. PHP 5.6 or higher (up to and including 8.2)
2. [JSON extension](#) (both the Shipping webservice and Shipping Status webservice can only be handled by the REST API)
3. [XMLWriter extension](#)
4. [XMLReader extension](#)
5. An HTTP Client such as [Symfony's HTTP Client](#) (PostNL lib v1.3.0 or higher) or [Guzzle](#) (or at least have the [PHP cURL extension](#) installed)
6. `opcache.save_comments` set to 1

Warning: Enabling the OPCache and setting `opcache.save_comments` to 0 will break this library since it depends on PHPDoc comments.

You can quickly check your current settings with this snippet:

```
echo "OPCache is ".opcache_enabled() ? "enabled\n" : "disabled\n";  
echo "opcache.save_comments is set to ".ini_get('opcache.save_comments') ? '1' : '0  
→';
```

Note: You can install any HTTP Client that is supported by the [HTTPPlug](#) project. See chapter *HTTP Client* for more information.

Note: If you use the Guzzle client, you do not need to have the cURL extension installed. As an alternative, you can enable `allow_url_fopen` in your system's `php.ini`. The included Guzzle version can work with the PHP stream wrapper to handle HTTP requests. For more information check out [Guzzle's documentation](#).

1.1.2 License

Licensed using the [MIT license](#).

The MIT License (MIT).

Copyright (c) 2017-2023 Michael Dekker (<https://github.com/firstred>)

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the “Software”), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED “AS IS”, WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

1.1.3 Contributing

Guidelines

1. This library supports PSR-1, PSR-2, PSR-3, PSR-4, PSR-6, PSR-7 and PSR-18.
2. The library is meant to be lean, fast and sticks to the standards of the SOAP API. This means that not every feature request can be accepted. When in doubt, please open an issue first.
3. The PostNL library has a minimum PHP version requirement of PHP 5.6. Pull requests must not require a PHP version lower than PHP 5.6.
4. All pull requests must include unit tests to ensure the change works as expected and to prevent regressions.

Running the tests

In order to contribute, you'll need to checkout the source from GitHub and install the dependencies using Composer:

```
git clone https://github.com/firstred/postnl-api-php.git
cd postnl-api-php && composer install
```

This library is unit tested with PHPUnit. Run the tests using the included PHPUnit version:

```
composer test
```

Building the documentation

The documentation is automatically built and hosted on readthedocs.io. You can build a local HTML copy by installing [Sphinx](#) and running

```
pip install -r docs/requirements.txt
```

to install the requirements, followed by

```
sphinx-build -b html docs builddir
```

to build the HTML output in the directory `builddir`.

1.2 Installation

The recommended way to install the PostNL library is through [Composer](#). Composer is a dependency management tool for PHP that allows you to declare the dependencies your project needs and installs them into your project.

This chapter assumes that you meet all the requirements as described in the [Overview](#) chapter.

Install composer with the instructions on this page: <https://getcomposer.org/download/>

1.2.1 Install through Composer

Install the PostNL library:

```
composer require firstred/postnl-api-php
```

You can optionally add the well-known [Guzzle](#) HTTP client as a dependency using composer:

```
composer require guzzlehttp/guzzle
```

This library will prefer the [Guzzle client](#) and automatically start using it instead of the built-in cURL-client.

Note: After installing, you need to require Composer's autoloader somewhere in your project, which is not necessary if you are using a framework such as Laravel or Symfony, for example.

You can require the autoloader as follows (assuming the `vendor/` dir is relative to your current directory):

```
require_once 'vendor/autoload.php';
```

You can find out more on how to install Composer, configure autoloading, and other best-practices for defining dependencies at getcomposer.org.

1.2.2 Install the latest development build through composer

During your development, you can keep up with the latest changes on the master branch by setting the version requirement for this library to dev-1.4.x.

```
{
  "require": {
    "firstred/postnl-api-php": "dev-1.4.x"
  }
}
```

Note: You will likely have to change the min-stability setting:

<https://getcomposer.org/doc/04-schema.md#minimum-stability>

1.3 Authentication

The PostNL API requires an API key to authenticate. You can request one via [MijnPostNL](#).

If you do not already have a PostNL account, be sure to check out this page: <https://developer.postnl.nl/request-api-key/>

Note: The API key is automatically attached to the `Firstred\PostNL\Entity\SOAP\UsernameToken` object (SOAP) or apikey HTTP header (REST). You do not have to manually add the API key with every request.

1.3.1 Passing all credentials

Besides having to provide an API key, you will have to pass information about your business. These credentials will have to be passed with a `Firstred\PostNL\Entity\Customer` object when creating a new `Firstred\PostNL\PostNL` instance.

Note: The `Firstred\PostNL\PostNL` class is the main class of this library. It handles all functionality you will need from a developer's perspective. After instantiating a new `Firstred\PostNL\PostNL` object you will have everything you need to communicate with the PostNL API. Everything else (caching, HTTP Clients, logging, etc.) is optional.

In order to get started with the API, the following credentials are important:

Required credentials

API key

Required: True

The API key

Customer code

Required: True

The customer code is a code that usually consists of 4 letters and appears in domestic 3S-codes.

Customer number

Required: True

The customer number is a number that usually consists of 8 digits.

Address

A filled *Firstred\PostNL\Entity\Address* object with at least the following information:

AddressType

Required: True

Default: 02

The address type should be 02, which means the address belongs to the sender.

City

Required: True

City

CompanyName

Required: True

The company name

HouseNr

Required: True

The house number

Street

Required: True

Street name

Zipcode

Required: True

The postcode. Be aware that the API might sometimes refer to a postcode as postcode, postal code or zipcode.

Collection location

Required: True

Default: 123456

I must admit that to this day I still do not have a single clue what this value means. It could refer to your local drop-off location (if you use one). If your PostNL account manager can provide you with a collection location number please use that one.

I usually fill out 123456 and it seems to work just fine.

Globalpack barcode type

Required: False

The barcode type to use for international shipments. This field is optional if you do not ship outside the EU.

This field usually consists of 2 letters.

Globalpack customer code

Required: False

The barcode type to use for international shipments. This field is optional if you do not ship outside the EU.

This field usually consists of 4 digits.

When you have all the required information, you are ready to configure the library. It can be configured as follows:

Note: Example configuration. All the credential come together in the *Firstred\PostNL\Entity\Customer* and main *Firstred\PostNL\PostNL* class.

```
<?php

use Firstred\PostNL\Entity\Address;
use Firstred\PostNL\Entity\Customer;

$apiKey = 'qjsdjufhjasudhfaSDFasdifh324';
$customer = (new Customer())
    ->setCollectionLocation('123456')
    ->setCustomerCode('DEVC')
    ->setCustomerNumber('11223344')
    ->setContactPerson('Test')
    ->setAddress((new Address())
        ->setAddressType('02')
        ->setCity('Hoofddorp')
        ->setCompanyName('PostNL')
        ->setCountrycode('NL')
        ->setHouseNr('42')
        ->setStreet('Siriusdreef')
        ->setZipcode('2132WT')
    )
    ->setGlobalPackBarcodeType('AB')
    ->setGlobalPackCustomerCode('1234')
;

$postnl = new PostNL(
    $customer,          // The filled Customer object
    $apiKey,            // The API key
    false,              // Sandbox = false, meaning we are now using the live_
    ↪environment
    PostNL::MODE_REST // We are going to use the REST API (default)
);
```

You might have noticed that several different ways have been used to instantiate an object. More information about this can be found in the *Object instantiation* section.

The PostNL client constructor accepts a few options:

customer

Required: True

The *Firstred\PostNL\Entity\Customer* object that is used to configure the client and let PostNL know who is requesting the data.

```
<?php

use Firstred\PostNL\Entity\Address;
use Firstred\PostNL\Entity\Customer;

// Create a new customer
$client = (new Customer())
    ->setCollectionLocation('123456') // Your collection location
    ->setCustomerCode('DEVC')        // Your Customer Code
    ->setCustomerNumber('11223344')  // Your Customer Number
    ->setGlobalPackBarcodeType('CX') // Add your GlobalPack_
    ↪information if you need
    ->setGlobalPackCustomerCode('1234') // to create international_
    ↪shipment labels
```

(continues on next page)

(continued from previous page)

```

->setContactPerson('Sander')
->setAddress((new Address())
    ->setAddressType('02')           // This address will be shown
    ↳ on the label
    ->setCity('Hoofddorp')
    ->setCompanyName('PostNL')
    ->setCountrycode('NL')
    ->setHouseNr('42')
    ->setStreet('Siriusdreef')
    ->setZipcode('2132WT')
)
->setEmail('test@voorbeeld.nl')
->setName('Michael')
;

```

apiKey

The API key to use. Note that if you want to switch from the legacy API to the new SOAP and REST API you will have to request a new key.

If you want to connect to the legacy API, you should pass a `Firstred\PostNL\Entity\SOAP\UsernameToken` with your username and token set:

```
$usernameToken = new UsernameToken('username', 'token');
```

You can request an API key for the sandbox environment on this page: <https://developer.postnl.nl/content/request-api-key> For a live key you should contact your PostNL account manager.

sandbox

Required: True

Indicate whether you'd like to connect to the sandbox environment. When *false* the library uses the live endpoints.

mode

Required: True

This library provides three ways to connect to the API:

- `Firstred\PostNL\PostNL::MODE_REST`: REST mode
- `Firstred\PostNL\PostNL::MODE_SOAP`: SOAP mode (deprecated since v1.4.0)
- `Firstred\PostNL\PostNL::MODE_LEGACY`: Legacy mode – This is the legacy SOAP API, which is now disabled and replaced with SOAP mode (deprecated since v1.4.0).

1.3.2 Authorization

You may not be authorized to access all services. Contact your PostNL account manager to find out what's available to you.

1.4 Quickstart

This page provides a quick introduction to this library and a few quick copy/paste examples which you can adjust to your likings.

This section assumes that you have installed the library and are fully authenticated.

If you do not have the library installed, head over to the [Installation](#) page. If you do not know what to pass to the main `Firstred\PostNL\PostNL` class, please refer to the chapter [Authentication](#) first.

You can do requests over the API by creating the request objects and passing them to one of the functions in the main `Firstred\PostNL\PostNL` class.

Creating request objects may seem a bit counter-intuitive at first, but this makes it a lot easier to follow the request examples from the [official API documentation](#) and quickly figure out what each field does.

Using an IDE with code completion is **strongly recommended**.

1.4.1 Requesting timeframes, locations and the delivery date at once

You can request the timeframes, locations and delivery date at once to quickly retrieve all the available delivery options.

Note: For more details on how to retrieve delivery options, consult the [Delivery options](#) chapter.

Here's how it is done from scratch:

PHP 5/7

```
<?php

use Firstred\PostNL\Entity\CutOffTime;
use Firstred\PostNL\Entity\Location;
use Firstred\PostNL\Entity\Message\Message;
use Firstred\PostNL\Entity\Request\GetDeliveryDate;
use Firstred\PostNL\Entity\Request\GetNearestLocations;
use Firstred\PostNL\Entity\Request\GetTimeframes;
use Firstred\PostNL\Entity\Timeframe;
use Firstred\PostNL\PostNL;
use Firstred\PostNL\Entity\Customer;
use Firstred\PostNL\Entity\Address;

require_once __DIR__ . '/vendor/autoload.php';

// Your PostNL credentials
$customer = (new Customer())
    ->setCollectionLocation('123456')
    ->setCustomerCode('DEV')
    ->setCustomerNumber('11223344')
    ->setContactPerson('Sander')
    ->setAddress((new Address())
        ->setAddressType('02')
        ->setCity('Hoofddorp')
        ->setCompanyName('PostNL')
        ->setCountrycode('NL')
        ->setHouseNr('42')
        ->setStreet('Siriusdreef')
        ->setZipcode('2132WT'))
```

(continues on next page)

(continued from previous page)

```

    )
    ->SetEmail('test@voorbeeld.nl')
    ->setName('Michael');

$apikey = 'YOUR_API_KEY_HERE';
$sandbox = true;

$postnl = new PostNL($customer, $apikey, $sandbox, PostNL::MODE_REST);

$mondayDelivery = true;
$deliveryDaysWindow = 7; // Amount of days to show ahead
$dropoffDelay = 0;       // Amount of days to delay delivery

// Configure the cut-off window for every day, 1 = Monday, 7 = Sunday
$cutoffTime = '15:00:00';
$dropoffDays = [1 => true, 2 => true, 3 => true, 4 => true, 5 => true, 6 => false, 7 => false];
foreach (range(1, 7) as $day) {
    if ($dropoffDays[$day]) {
        $cutoffTimes[] = new CutOffTime(
            str_pad($day, 2, '0', STR_PAD_LEFT),
            date('H:i:00', strtotime($cutoffTime)),
            true
        );
    }
}

$response = $postnl->getTimeframesAndNearestLocations(
    (new GetTimeframes())
        ->setTimeframe([
            (new Timeframe())
                ->setCountryCode('NL')
                ->setEndDate(date('d-m-Y', strtotime(" +{$deliveryDaysWindow} days +{
->$dropoffDelay} days"))))
                ->setHouseNr('66')
                ->setOptions(['Morning', 'Daytime'])
                ->setPostalCode('2132WT')
                ->setStartDate(date('d-m-Y', strtotime("+1 days")))
                ->setSundaySorting(!empty($mondayDelivery) && date('w', strtotime("+{
->$dropoffDelay} days")))
        ]),
    (new GetNearestLocations())
        ->setCountrycode('NL')
        ->setLocation(
            (new Location())
                ->setAllowSundaySorting(!empty($mondayDelivery))
                ->setDeliveryOptions(['PG'])
                ->setOptions(['Daytime'])
                ->setHouseNr('66')
                ->setPostalcode('2132WT')
        ),
    (new GetDeliveryDate())
        ->setGetDeliveryDate(
            (new GetDeliveryDate())
                ->setAllowSundaySorting(!empty($mondayDelivery))
                ->setCountryCode('NL')

```

(continues on next page)

(continued from previous page)

```

        ->setCutoffTimes($cutoffTimes)
        ->setHouseNr('12')
        ->setOptions(['Daytime', 'Evening'])
        ->setPostalCode('2132WT')
        ->setShippingDate(date('d-m-Y H:i:s'))
        ->setShippingDuration(strval(1 + (int) $dropoffDelay))
    )
    ->setMessage(new Message())
};

```

PHP 8

```

<?php

use Firstred\PostNL\Entity\Label;
use Firstred\PostNL\PostNL;
use Firstred\PostNL\Entity\Customer;
use Firstred\PostNL\Entity\Address;
use Firstred\PostNL\Entity\Shipment;
use Firstred\PostNL\Entity\Dimension;

require_once __DIR__ . '/vendor/autoload.php';

// Your PostNL credentials
$customer = new Customer(
    CustomerNumber: '11223344',
    CustomerCode: 'DEVC',
    CollectionLocation: '123456',
    ContactPerson: 'Sander',
    Email: 'test@voorbeeld.nl',
    Name: 'Michael',
    Address: new Address(
        AddressType: '02',
        CompanyName: 'PostNL',
        Street: 'Siriusdreef',
        HouseNr: '42',
        Zipcode: '2132WT',
        City: 'Hoofddorp',
        Countrycode: 'NL',
    ),
);

$apikey = 'YOUR_API_KEY_HERE';
$sandbox = true;

$postnl = new PostNL(
    customer: $customer,
    apiKey: $apikey,
    sandbox: $sandbox,
    mode: PostNL::MODE_REST,
);

$mondayDelivery = true;
$deliveryDaysWindow = 7; // Amount of days to show ahead
$dropoffDelay = 0;       // Amount of days to delay delivery

```

(continues on next page)

(continued from previous page)

```
// Configure the cut-off window for every day, 1 = Monday, 7 = Sunday
$cutoffTime = '15:00:00';
$dropoffDays = [1 => true, 2 => true, 3 => true, 4 => true, 5 => true, 6 => false, 7 => false];
foreach (range(1, 7) as $day) {
    if ($dropoffDays[$day]) {
        $cutOffTimes[] = new CutOffTime(
            str_pad($day, 2, '0', STR_PAD_LEFT),
            date('H:i:00', strtotime($cutoffTime)),
            true
        );
    }
}

$response = $postnl->getTimeframesAndNearestLocations(
    (new GetTimeframes())
        ->setTimeframe([
            (new Timeframe())
                ->setCountryCode('NL')
                ->setEndDate(date('d-m-Y', strtotime(" +{$deliveryDaysWindow} days +{$dropoffDelay} days")))
                ->setHouseNr('66')
                ->setOptions(['Morning', 'Daytime'])
                ->setPostalCode('2132WT')
                ->setStartDate(date('d-m-Y', strtotime("+1 days")))
                ->setSundaySorting(!empty($mondayDelivery) && date('w', strtotime("+{$dropoffDelay} days")))
            ],
            (new GetNearestLocations())
                ->setCountrycode('NL')
                ->setLocation(
                    (new Location())
                        ->setAllowSundaySorting(!empty($mondayDelivery))
                        ->setDeliveryOptions(['PG'])
                        ->setOptions(['Daytime'])
                        ->setHouseNr('66')
                        ->setPostalcode('2132WT')
                ),
            (new GetDeliveryDate())
                ->setGetDeliveryDate(
                    (new GetDeliveryDate())
                        ->setAllowSundaySorting(!empty($mondayDelivery))
                        ->setCountryCode('NL')
                        ->setCutOffTimes($cutOffTimes)
                        ->setHouseNr('12')
                        ->setOptions(['Daytime', 'Evening'])
                        ->setPostalCode('2132WT')
                        ->setShippingDate(date('d-m-Y H:i:s'))
                        ->setShippingDuration(strval(1 + (int) $dropoffDelay))
                    )
                ->setMessage(new Message())
        );
```

The response variable will be an associative array containing the timeframes, nearest locations and delivery date. It has the following keys:

timeframes

This is a :php:class:'Firstred

PostNL

Entity

Response

ResponseTimeframes' object containing all the timeframes. You can iterate over all the available timeframes as follows.

.. code-block:: php

```
foreach ($response['timeframes'] as $timeframe) {
    $date = $timeframe->getDate()->format('Y-m-d');
```

```
    // Note that a timeframe object might have multiple embedded timeframes. // This might happen when you
    // request both 'Daytime' and 'Evening' timeframes
    $from = $timeframe->getTimeframes()[0]->getFrom();
    $to = $timeframe->getTimeframes()[0]->getTo();
```

```
    echo "date - $from :from, to: $to";
```

```
    // Output: 2020-03-03 - from: 12:15:00, to: 14:00:00
```

.. note::

Note that the API usually groups timeframes by date, but is not guaranteed to do so, so do not rely on it!

The embedded timeframes contain the actual timeframes on that particular day.

The response format is the same for both the SOAP and REST API and is described on this page: https://developer.postnl.nl/browse-apis/delivery-options/timeframe-webservice/testtool-rest/#/Timeframe/get_calculate_timeframes

Note: Dates and times returned by the library always use the same format for consistency and therefore may differ from the API. Please refer to the [Formats](#) chapter for more information.

locations

The pickup locations can be found in the `Firstred\PostNL\Entity\Response\GetNearestLocationsResponse` object.

You can iterate over the found locations as follows:

```
foreach ($response['locations']->getGetLocationsResult()->getResponseLocation() as $location) {
    var_dump($location);
}
```

delivery_date

The delivery date that was found, returned in a `Firstred\PostNL\Entity\Response\GetDeliveryDateResponse` object.

You can print the date as follows:

```
echo $response['delivery_date']->getDeliveryDate()->format('d-m-Y');
```

1.4.2 Creating a (merged) shipment label

This section describes how you can create two labels and have them merged into a single PDF automatically.

Note: If you'd like to know more about all the methods you can use to create labels, see the [Send and track shipments](#) chapter.

Example code:

```

use Firstred\PostNL\Entity\Label;
use Firstred\PostNL\PostNL;
use Firstred\PostNL\Entity\Customer;
use Firstred\PostNL\Entity\Address;
use Firstred\PostNL\Entity\Shipment;
use Firstred\PostNL\Entity\Dimension;

require_once __DIR__ . '/vendor/autoload.php';

// Your PostNL credentials
$customer = (new Customer())
    ->setCollectionLocation('123456')
    ->setCustomerCode('DEVC')
    ->setCustomerNumber('11223344')
    ->setGlobalPackBarcodeType('CX')
    ->setGlobalPackCustomerCode('1234')
    ->setContactPerson('Sander')
    ->setAddress((new Address())
        ->setAddressType('02')
        ->setCity('Hoofddorp')
        ->setCompanyName('PostNL')
        ->setCountrycode('NL')
        ->setHouseNr('42')
        ->setStreet('Siriusdreef')
        ->setZipcode('2132WT')
    )
    ->setEmail('test@voorbeeld.nl')
    ->setName('Michael');

$apikey = 'YOUR_API_KEY_HERE';
$sandbox = true;

$postnl = new PostNL($customer, $apikey, $sandbox, PostNL::MODE_SOAP);

$barcodes = $postnl->generateBarcodesByCountryCodes(['NL' => 2]);

$shipments = [
    (new Shipment())
        ->setAddresses([
            (new Address())
                ->setAddressType('01')
                ->setCity('Utrecht')
                ->setCountrycode('NL')
                ->setFirstName('Peter')
                ->setHouseNr('9')
                ->setHouseNrExt('a bis')
                ->setName('de Ruijter')
                ->setStreet('Bilderdijkstraat')
                ->setZipcode('3521VA')
            ])
        ->setBarcode($barcodes['NL'][0])
        ->setDimension(new Dimension('1000'))
        ->setProductCodeDelivery('3085'),
    (new Shipment())
        ->setAddresses([
            (new Address())
                ->setAddressType('01')

```

(continues on next page)


(continued from previous page)

```
        ->setCity('Utrecht')
        ->setCountrycode('NL')
        ->setFirstName('Peter')
        ->setHouseNr('9')
        ->setHouseNrExt('a bis')
        ->setName('de Ruijter')
        ->setStreet('Bilderdijkstraat')
        ->setZipcode('3521VA')
    })
    ->setBarcode($barcodes['NL'][1])
    ->setDimension(new Dimension('1000'))
    ->setProductCodeDelivery('3085')
];

$label = $postnl->generateLabels(
    $shipments,
    'GraphicFile|PDF', // Printertype (only PDFs can be merged -- no need to use the_
    ↪Merged types)
    true, // Confirm immediately
    true, // Merge
    Label::FORMAT_A4, // Format -- this merges multiple A6 labels onto an A4
    [
        1 => true,
        2 => true,
        3 => true,
        4 => true,
    ] // Positions
);

file_put_contents('labels.pdf', $label);
```

This will write a `labels.pdf` file that looks like this:

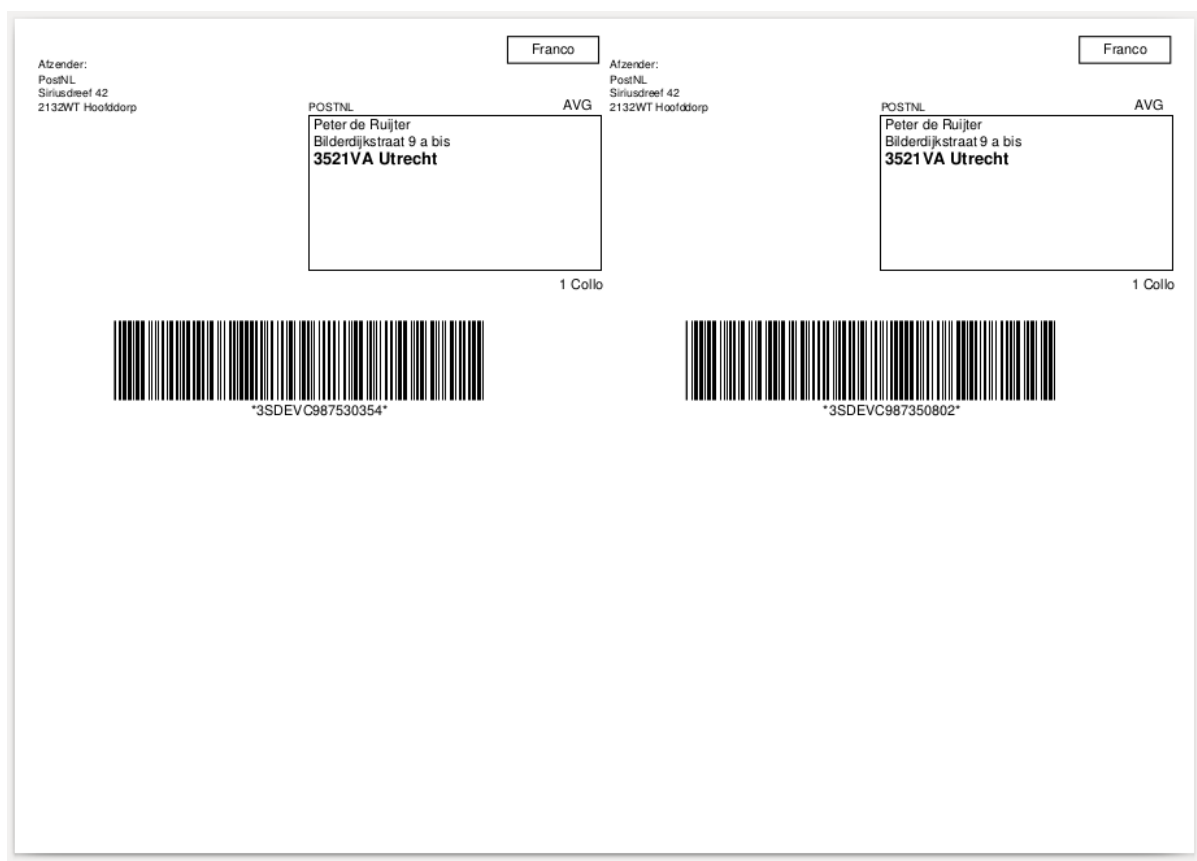

If you'd rather have the user download a label, you can set the Content-Disposition header:

```
$label = ...;

header('Content-Type: application/pdf');
header('Content-Disposition: attachment; filename="label.pdf"');
echo $label;
exit;
```

Note: Your framework might already provide a way to output files. Here are a few examples for several popular PHP frameworks:

Symfony

```
<?php

use Symfony\Bundle\FrameworkBundle\Controller\AbstractController;
use Symfony\Component\HttpFoundation\Response;
use Symfony\Component\HttpFoundation\ResponseHeaderBag;

class CreateShipmentController extends AbstractController
{
    public function downloadLabelAction()
    {
        // Provide a name for your file with extension
        $filename = 'label.pdf';

        // Create the label
        $label = ...;
```

(continues on next page)

(continued from previous page)

```
// Return a response with a specific content
$response = new Response($label);

// Create the disposition of the file
$disposition = $response->headers->makeDisposition(
    ResponseHeaderBag::DISPOSITION_ATTACHMENT,
    $filename
);

// Set the content type and disposition
$response->headers->set('Content-Type', 'application/pdf');
$response->headers->set('Content-Disposition', $disposition);

// Dispatch request
return $response;
}
}
```

Source: <https://ourcodeworld.com/articles/read/329/how-to-send-a-file-as-response-from-a-controller-in-symfony-3>
Laravel

```
<?php

namespace App\Http\Controllers;

use Illuminate\Http\Request;

class DownloadLabelController extends Controller
{
    public function downloadLabelAction(Request $request) {
        // Create the label
        $label = ...;

        return response()
            ->header('Content-Type', 'application/pdf')
            ->header('Content-Disposition', 'attachment; filename="label.pdf"');
    }
}
```

Source: <https://laravel.com/docs/8.x/controllers>
Source: <https://gist.github.com/diegofelix/8863402>

1.4.3 Tracking a shipment

You can track a single shipment by calling `Firstred\PostNL\PostNL::getShippingStatusByBarcode` with the barcode of the shipment.

It accepts the following parameters:

barcode

The actual barcode, for example: 3SABCD1837238723.

complete

Whether the method should return a complete status update. A complete status update contains the shipment history as well.

Code example:

PHP 5/7

```
$postnl = new PostNL(...);

$currentStatusResponse = $postnl->getShippingStatusByBarcode(
    '3SABCD1837238723', // Barcode
    false               // Return just the current status (complete = false)
);
```

PHP 8

```
$postnl = new PostNL(...);

$currentStatusResponse = $postnl->getShippingStatusByBarcode(
    barcode: '3SABCD1837238723',
    complete: false,
);
```

1.5 Delivery options

The PostNL API allows you to retrieve a list of predicted timeframes and a list of possible pickup locations. For timeframes you will have to use a certain date range and to get the nearest pickup locations you can use an address or geolocation.

There are two ways to gather timeframes and pickup locations. You can

1. combine the delivery date, timeframe and location webservice
2. or use the checkout service.

The checkout service is currently not supported, but this library contains an easy interface to combine the three separate services listed in this section and provides the same functionality, if not more.

This section lists all the ways in which you can retrieve delivery options, using three webservices. It is possible to request:

1. *Delivery dates* (when a shipment could arrive, given the current shipping date)
2. *Shipping dates* (when a shipment should be dispatched, given the predicted delivery date)
3. *Timeframes*
4. *Nearest locations*
5. *Nearest locations by coordinates*

1.5.1 Checkout

On an e-commerce checkout page you will probably want to show timeframes and/or pickup locations based on the current day and cut-off window. This library provides an interface to easily combine the three webservices required to show all the delivery options. It will simultaneously contact the three webservices and request a list of timeframes and pickup locations based on the given input.

An example of how the interface can be used can be found in the section *Requesting timeframes, locations and the delivery date at once*, part of the *Quickstart* chapter.

1.5.2 Deliverydate webservice

Note:

PostNL API documentation for this service:

<https://developer.postnl.nl/apis/deliverydate-webservice>

Use the delivery date webservice to determine the delivery and shipping date. You can use this service to calculate the dates 'live' and to make sure you do not promise your customers any timeframes that are no longer available.

Delivery dates

Here's how you can retrieve the closest delivery date:

```
<?php

use Firstred\PostNL\Entity\CutOffTime;
use Firstred\PostNL\Entity\Request\GetDeliveryDate;

$cutoffTime = '15:00:00';
$dropoffDays = [1 => true, 2 => true, 3 => true, 4 => true, 5 => true, 6 => false, 7 => false];
foreach (range(1, 7) as $day) {
    if (isset($dropoffDays[$day])) {
        $cutOffTimes[] = new CutOffTime(
            str_pad($day, 2, '0', STR_PAD_LEFT),
            date('H:i:00', strtotime($cutoffTime)),
            true
        );
    }
}

$deliveryDate = $postnl->getDeliveryDate(
    (new GetDeliveryDate())
        ->setGetDeliveryDate(
            (new GetDeliveryDate())
                ->setAllowSundaySorting(false)
                ->setCountryCode('NL')
                ->setCutOffTimes($cutOffTimes)
                ->setHouseNr('66')
                ->setOptions(['Morning', 'Daytime'])
                ->setPostalCode('2132WT')
                ->setShippingDate(date('d-m-Y H:i:s'))
                ->setShippingDuration('1')
            )
        )
);
```

The result will be a *GetDeliveryDateResponse*. Calling *getDeliveryDate* on this object will return the delivery date as a string in the *d-m-Y H:i:s* PHP date format.

The function accepts the following arguments

getDeliveryDate

Required: True

The *Firstred\PostNL\Entity\Request\GetDeliveryDate* request object. See the API documentation for the possibilities. As shown in the example you will need to provide as many details as possible to get accurate availability information.

Shipping dates

The Shipping Date service almost works in the same way as the Delivery Date service, except this time you provide the actual delivery date in order to calculate the closest shipping date.

```
<?php

use Firstred\PostNL\Entity\Request\GetSentDate;
use Firstred\PostNL\Entity\Request\GetSentDateRequest;

$deliveryDate = $postnl->getSentDate(
    (new GetSentDateRequest())
        ->setGetSentDate(
            (new GetSentDate())
                ->setAllowSundaySorting(false)
                ->setCountryCode('NL')
                ->setHouseNr('66')
                ->setOptions(['Morning', 'Daytime'])
                ->setPostalCode('2132WT')
                ->setShippingDate(date('d-m-Y H:i:s'))
                ->setShippingDuration('1')
            )
        )
);
```

The function accepts the following arguments

getSentDate

Required: True

The *Firstred\PostNL\Entity\Request\GetSentDateRequest* request object. See the API documentation for the possibilities. As shown in the example you will need to provide as many details as possible to get accurate availability information.

1.5.3 Timeframe webservice

Note:

PostNL API documentation for this service:

<https://developer.postnl.nl/apis/timeframe-webservice>

Timeframes

```
<?php

use Firstred\PostNL\Entity\CutOffTime;

$deliveryDaysWindow = 7;
$dropoffDelay = 0;

$timeframes = $postnl->getTimeframes(new GetTimeframes())
    ->setTimeframe([
        (new Timeframe())
            ->setCountryCode('NL')
            ->setEndDate(date('d-m-Y', strtotime(" +{$deliveryDaysWindow} days +{
->$dropoffDelay} days")))
            ->setHouseNr('66')
            ->setOptions(['Daytime', 'Evening'])
            ->setPostalCode('2132WT')
            ->setStartDate(date('d-m-Y', strtotime(" +1 day +{$dropoffDelay} days")))
            ->setSundaySorting(false)
    ])
);
```

timeframes

Required: True

The *Firstred\PostNL\Entity\Request\GetTimeframes* request object. See the API documentation for more details.

1.5.4 Location webservice

Note:

PostNL API documentation for this service:

<https://developer.postnl.nl/apis/location-webservice>

The location service allows you to retrieve a list of locations for the given postcode or coordinates.

Nearest locations

Here's an example of how you can retrieve the nearest location by postcode:

```
<?php

use Firstred\PostNL\Entity\Location;
use Firstred\PostNL\Entity\Request\GetNearestLocations;

$postnl->getNearestLocations(
    (new GetNearestLocations())
        ->setCountrycode('NL')
        ->setLocation(
            (new Location())
                ->setAllowSundaySorting(false)
                ->setDeliveryOptions(['PG'])
                ->setOptions(['Daytime'])
        )
);
```

(continues on next page)

(continued from previous page)

```

        ->setHouseNr('66')
        ->setPostalcode('2132WT')
    )
);

```

getNearestLocations**Required:** True

The *Firstred\PostNL\Entity\Request\GetNearestLocations* request object. See the API documentation for more details.

Nearest locations by coordinates

You can also get the locations by specifying a bounding box. One can be drawn by providing the North-West and South-East corner of the box:

```

<?php

use Firstred\PostNL\Entity\CoordinatesNorthWest;
use Firstred\PostNL\Entity\CoordinatesSouthEast;
use Firstred\PostNL\Entity\Location;
use Firstred\PostNL\Entity\Request\GetLocationsInArea;

$postnl->getLocationsInArea(
    (new GetLocationsInArea())
        ->setCountrycode('NL')
        ->setLocation(
            (new Location())
                ->setAllowSundaySorting(false)
                ->setDeliveryDate(date('d-m-Y', strtotime('+1 day')))
                ->setDeliveryOptions([
                    'PG',
                ])
                ->setOptions([
                    'Daytime',
                ])
                ->setCoordinatesNorthWest(
                    (new CoordinatesNorthWest())
                        ->setLatitude((string) 52.156439)
                        ->setLongitude((string) 5.015643)
                )
                ->setCoordinatesSouthEast(
                    (new CoordinatesSouthEast())
                        ->setLatitude((string) 52.017473)
                        ->setLongitude((string) 5.065254)
                )
            )
        )
);

```

This function accepts the arguments:

locationsInArea**Required:** True

The *Firstred\PostNL\Entity\Request\GetLocationsInArea* request object. See the API documentation for more details.

1.6 Send and track shipments

Sending shipments can be done in one of two ways:

1. Using the Shipping webservice
2. Using the Barcode, Labelling and Confirming webservice

This library supports both methods. In this sections we'll go through all the available webservices.

1.6.1 Barcode webservice

Note:

PostNL API documentation for this service:

<https://developer.postnl.nl/apis/barcode-webservice/overview>

The barcode service allows you to generate barcodes for your shipment labels. Usually you would reserve an amount of barcodes, generate shipping labels and eventually confirm those labels. According to PostNL, this flow is necessary for a higher delivery success rate.

Generate a single barcode

You can generate a single barcode for domestic shipments as follows:

```
$postnl->generateBarcode();
```

This will generate a 3S barcode meant for domestic shipments only.

The method `Firstred\PostNL\PostNL::generateBarcode` accepts the following arguments:

type

Required: False

Default: 3S

The barcode type. This is 2S/3S for the Netherlands and EU Pack Special shipments. For other destinations this is your GlobalPack barcode type. For more info, check the [PostNL barcode service page](#).

range

Required: False

Default: null

For domestic and EU shipments this is your customer code. Otherwise, your GlobalPack customer code.

serie

Required: False

Default: null

This is the barcode range for your shipment(s). Check the [PostNL barcode service page](#) for the ranges that are available.

eps

Required: False

Default: false

Indicates whether this is an EU Pack Special shipment.

Generate a barcode by country code

It is possible to generate a barcode by country code. This will let the library figure out what type, range, serie to use.

Example:

```
$postnl->generateBarcodeByCountryCode('BE');
```

This will generate a 3S barcode meant for domestic shipments only.

The method `Firstred\PostNL\PostNL::generateBarcodeByCountryCode` accepts the following arguments:

iso

Required: True

The two letter country ISO-3166 alpha-2 code. Make sure you use UPPERCASE. List of ISO-3166 codes: <https://www.iban.com/country-codes>

Generate multiple barcodes by using country codes

You can generate a whole batch of barcodes at once by providing country codes and the amounts you would like to generate.

Example:

```
$postnl->generatesBarcodeByCountryCodes(['NL' => 2, 'DE' => 3]);
```

The method `Firstred\PostNL\PostNL::generateBarcodesByCountryCodes` will return a list of barcodes:

```
[
    'NL' => [
        '3SDEVC1111111111',
        '3SDEVC2222222222',
    ],
    'DE' => [
        '3SDEVC1111111111',
        '3SDEVC2222222222',
        '3SDEVC3333333333',
    ],
];
```

The function accepts the following argument:

type

Required: True

This must be an associative array with country codes as key and the amount of barcodes you'd like to generate per country as the value.

1.6.2 Labelling webservice

Note:

PostNL API documentation for this service:

<https://developer.postnl.nl/apis/labelling-webservice>

The labelling service allows you to create shipment labels and optionally confirm the shipments. The library has a built-in way to merge labels automatically, so you can request labels for multiple shipments at once.

Generate a single label

The following example generates a single shipment label for a domestic shipment:

```
$postnl = new PostNL(...);
$postnl->generateLabel(
    (new Shipment())
        ->setAddresses([
            (new Address())
                ->setAddressType('01')
                ->setCity('Utrecht')
                ->setCountrycode('NL')
                ->setFirstName('Peter')
                ->setHouseNr('9')
                ->setHouseNrExt('a bis')
                ->setName('de Ruijter')
                ->setStreet('Bilderdijkstraat')
                ->setZipcode('3521VA'),
            (new Address())
                ->setAddressType('02')
                ->setCity('Hoofddorp')
                ->setCompanyName('PostNL')
                ->setCountrycode('NL')
                ->setHouseNr('42')
                ->setStreet('Siriusdreef')
                ->setZipcode('2132WT'),
        ])
        ->setBarcode($barcode)
        ->setDeliveryAddress('01')
        ->setDimension(new Dimension('2000'))
        ->setProductCodeDelivery('3085'),
    'GraphicFile|PDF',
    false
);
```

This will create a standard shipment (product code 3085). You can access the label (base64 encoded PDF) this way:

```
$pdf = base64_decode($label->getResponseShipments()[0]->getLabels()[0]->getContent());
```

This function accepts the following arguments:

shipment

Required: True

The *Firstred\PostNL\Entity\Shipment* object. Visit the PostNL API documentation to find out what a *Firstred\PostNL\Entity\Shipment* object consists of. The *Firstred\PostNL\Entity\Shipment* object is based on the SOAP API: <https://developer.postnl.nl/browse-apis/send-and-track/labelling-webservice/documentation-soap/>

printerType

Required: True

Default: GraphicFile|PDF

The list of supported printer types can be found on this page: <https://developer.postnl.nl/browse-apis/send-and-track/labelling-webservice/documentation-soap/>

confirm

Required: False

Default: true

Indicates whether the shipment should immediately be confirmed.

Generate multiple shipment labels

The following example shows how a label can be merged:

```
$shipments = [
    (new Shipment())
        ->setAddresses([
            (new Address())
                ->setAddressType('01')
                ->setCity('Utrecht')
                ->setCountrycode('NL')
                ->setFirstName('Peter')
                ->setHouseNr('9')
                ->setHouseNrExt('a bis')
                ->setName('de Ruijter')
                ->setStreet('Bilderdijkstraat')
                ->setZipcode('3521VA')
        ])
        ->setBarcode($barcodes['NL'][0])
        ->setDimension(new Dimension('1000'))
        ->setProductCodeDelivery('3085'),
    (new Shipment())
        ->setAddresses([
            (new Address())
                ->setAddressType('01')
                ->setCity('Utrecht')
                ->setCountrycode('NL')
                ->setFirstName('Peter')
                ->setHouseNr('9')
                ->setHouseNrExt('a bis')
                ->setName('de Ruijter')
                ->setStreet('Bilderdijkstraat')
                ->setZipcode('3521VA')
        ])
        ->setBarcode($barcodes['NL'][1])
        ->setDimension(new Dimension('1000'))
        ->setProductCodeDelivery('3085')
];

$label = $postnl->generateLabels(
    $shipments,
    'GraphicFile|PDF', // Printertype (only PDFs can be merged -- no need to use the
    ↪Merged types)
    true, // Confirm immediately
    true, // Merge
    Label::FORMAT_A4, // Format -- this merges multiple A6 labels onto an A4
    [
        1 => true,
        2 => true,
        3 => true,
        4 => true,
    ] // Positions
);

file_put_contents('labels.pdf', $label);
```

By setting the *merge* flag it will automatically merge the labels into a PDF string.

The function accepts the following arguments:

shipments

Required: True

An array with *Firstred\PostNL\Entity\Shipment* objects. Visit the PostNL API documentation to find out what a *Firstred\PostNL\Entity\Shipment* object consists of. The *Firstred\PostNL\Entity\Shipment* object is based on the SOAP API: <https://developer.postnl.nl/browse-apis/send-and-track/labelling-webservice/documentation-soap/>

printerType

Required: False

Default: GraphicFile|PDF

The list of supported printer types can be found on this page: <https://developer.postnl.nl/browse-apis/send-and-track/labelling-webservice/documentation-soap/>

confirm

Required: False

Default: true

Indicates whether the shipment should immediately be confirmed.

merge

Required: False

Default: false

This will merge the labels and make the function return a pdf string of the merged label.

format

Required: False

Default: Firstred\PostNL\PostNL::FORMAT_A4


This sets the paper format (can be *Firstred\PostNL\PostNL::FORMAT_A4* or *Firstred\PostNL\PostNL::FORMAT_A6*).

positions

Required: False

Default: [1 => true, 2 => true, 3 => true, 4 => true]

This will set the positions of the labels. The following image shows the available positions, use *true* or *false* to resp. enable or disable a position:

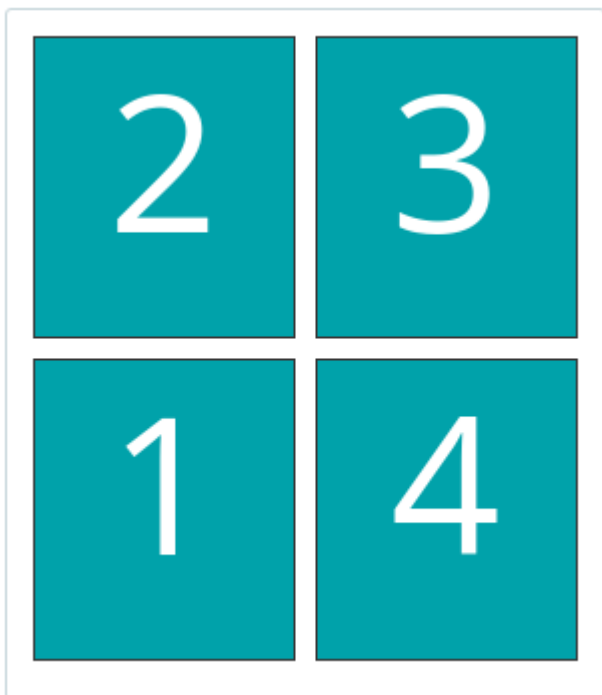

1.6.3 Shipping webservice

Note:

PostNL API documentation for this service:

<https://developer.postnl.nl/browse-apis/send-and-track/shipping-webservice/>

The shipping service combines all the functionality of the labeling, confirming, barcode and easy return service. The service is only available as REST.

Send a single shipment

The following example sends a single domestic shipment:

```
$postnl = new PostNL(...);
$postnl->sendShipment(
    (new Shipment())
        ->setAddresses([
            (new Address())
                ->setAddressType('01')
                ->setCity('Utrecht')
                ->setCountrycode('NL')
                ->setFirstName('Peter')
                ->setHouseNr('9')
                ->setHouseNrExt('a bis')
                ->setName('de Ruijter')
                ->setStreet('Bilderdijkstraat')
                ->setZipcode('3521VA'),
            (new Address())
                ->setAddressType('02')
```

(continues on next page)

(continued from previous page)

```

        ->setCity('Hoofddorp')
        ->setCompanyName('PostNL')
        ->setCountrycode('NL')
        ->setHouseNr('42')
        ->setStreet('Siriusdreef')
        ->setZipcode('2132WT'),
    ])
    ->setDeliveryAddress('01')
    ->setDimension(new Dimension('2000'))
    ->setProductCodeDelivery('3085'),
    'GraphicFile|PDF',
    false
);

```

This will create a standard shipment (product code 3085). You can access the label (base64 encoded PDF) this way:

```

$pdf = base64_decode($shipping->getResponseShipments()[0]->getLabels()[0]->
    ->getContent());

```

This function accepts the following arguments:

shipment

Required: True

The *Firstred\PostNL\Entity\Shipment* object. Visit the PostNL API documentation to find out what a Shipment object consists of.

printertype

Required: False

Default: GraphicFile|PDF

The list of supported printer types can be found on this page: <https://developer.postnl.nl/browse-apis/send-and-track/shipping-webservice/documentation/>

confirm

Required: False

Default: true

Indicates whether the shipment should immediately be confirmed.

Send multiple shipments

The following example shows how labels of multiple shipment labels can be merged:

```

$shipments = [
    (new Shipment())
        ->setAddresses([
            (new Address())
                ->setAddressType('01')
                ->setCity('Utrecht')
                ->setCountrycode('NL')
                ->setFirstName('Peter')
                ->setHouseNr('9')
                ->setHouseNrExt('a bis')
                ->setName('de Ruijter')
                ->setStreet('Bilderdijkstraat')
                ->setZipcode('3521VA')

```

(continues on next page)

(continued from previous page)

```

    ])
    ->setBarcode($barcodes['NL'][0])
    ->setDimension(new Dimension('1000'))
    ->setProductCodeDelivery('3085'),
    (new Shipment())
    ->setAddresses([
        (new Address())
        ->setAddressType('01')
        ->setCity('Utrecht')
        ->setCountrycode('NL')
        ->setFirstName('Peter')
        ->setHouseNr('9')
        ->setHouseNrExt('a bis')
        ->setName('de Ruijter')
        ->setStreet('Bilderdijkstraat')
        ->setZipcode('3521VA')
    ])
    ->setBarcode($barcodes['NL'][1])
    ->setDimension(new Dimension('1000'))
    ->setProductCodeDelivery('3085')
];

$label = $postnl->sendShipments(
    $shipments,
    'GraphicFile|PDF', // Printertype (only PDFs can be merged -- no need to use the_
↪Merged types)
    true, // Confirm immediately
    true, // Merge
    Label::FORMAT_A4, // Format -- this merges multiple A6 labels onto an A4
    [
        1 => true,
        2 => true,
        3 => true,
        4 => true,
    ] // Positions
);

file_put_contents('labels.pdf', $label);

```

By setting the *merge* flag it will automatically merge the labels into a PDF string.

The function accepts the following arguments:

shipments

Required: True

An array with Firstred\Entity\Shipment objects. Visit the PostNL API documentation to find out what a Shipment object consists of.

printertype

Required: False

Default: GraphicFile|PDF

The list of supported printer types can be found on this page: <https://developer.postnl.nl/browse-apis/send-and-track/shipping-webservice/documentation/>

confirm

Required: False

Default: true

Indicates whether the shipment should immediately be confirmed.

merge

Required: False

Default: false

This will merge the labels and make the function return a pdf string of the merged label.

format

Required: False

Default: Firstred\PostNL\PostNL::FORMAT_A4


This sets the paper format (can be Firstred\PostNL\PostNL::FORMAT_A4 or Firstred\PostNL\PostNL::FORMAT_A6).

positions

Required: False

Default: [1 => true, 2 => true, 3 => true, 4 => true]

This will set the positions of the labels. The following image shows the available positions, use `true` or `false` to resp. enable or disable a position:

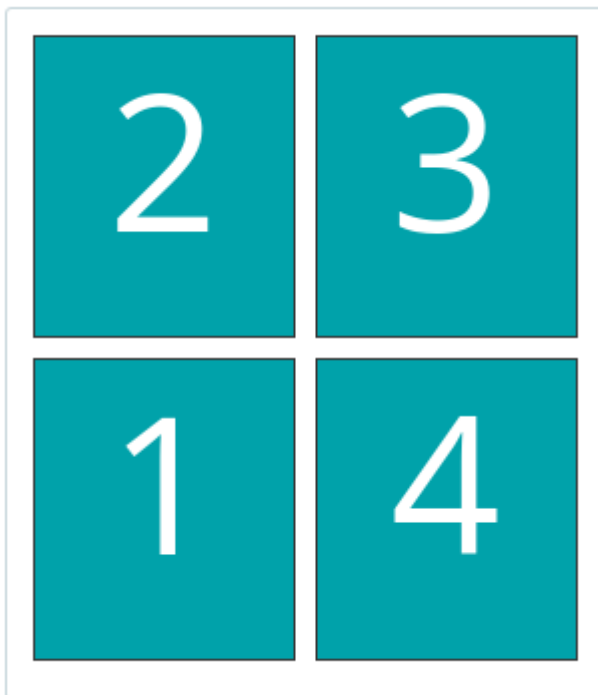

1.6.4 Confirming webservice

Note:

PostNL API documentation for this service:

<https://developer.postnl.nl/apis/confirming-webservice>

You can confirm shipments that have previously not been confirmed. Shipments can be confirmed after both the *Labelling webservice* or the *Shipping webservice*.

The available methods are `Firstred\PostNL\PostNL::confirmShipment` and `Firstred\PostNL\PostNL::confirmShipments`. The first method accepts a single `Firstred\PostNL\Entity\Shipment` object whereas the latter accepts an array of `:php:class:Firstred\PostNL\Entity\Shipment`s`.

Example code:

```
$postnl = new PostNL(...);

$confirmedShipment = $postnl->confirmShipment(
    (new Shipment())
        ->setAddresses([
            (new Address())
                ->setAddressType('01')
                ->setCity('Utrecht')
                ->setCountrycode('NL')
                ->setFirstName('Peter')
                ->setHouseNr('9')
                ->setHouseNrExt('a bis')
                ->setName('de Ruijter')
                ->setStreet('Bilderdijkstraat')
                ->setZipcode('3521VA'),
            (new Address())
                ->setAddressType('02')
                ->setCity('Hoofddorp')
                ->setCompanyName('PostNL')
                ->setCountrycode('NL')
                ->setHouseNr('42')
                ->setStreet('Siriusdreef')
                ->setZipcode('2132WT'),
        ])
        ->setBarcode('3SDEVC201611210')
        ->setDeliveryAddress('01')
        ->setDimension(new Dimension('2000'))
        ->setProductCodeDelivery('3085')
);
```

The output is a `Firstred\PostNL\Entity\Response\ConfirmingResponseShipment` or an array with these objects in case you are confirming multiple shipments. The results array will have the same index keys as the request input.

1.6.5 Shippingstatus webservice

Note:

PostNL API documentation for this service:

<https://developer.postnl.nl/apis/shippingstatus-webservice>

This service can be used to retrieve shipping statuses. For a short update request a *current status*, otherwise *complete status* will provide you with a long list containing the shipment's history.

Current or complete shipping status by barcode

Gets the current or complete status by barcode. A complete status also includes the shipment history.

```
$postnl = new PostNL(...);  
$postnl->getShippingStatusByBarcode('3SDEVC98237423');
```

barcode

Required: True

The barcode, e.g.: 3SDEVC98237423

complete

Required: False

Return the complete shipping status. This includes the shipment history.

Depending on the complete parameter this returns a *Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment* or a *Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment* object.

Multiple current or complete shipping statuses by barcodes

Gets multiple current or complete statuses by barcodes. A complete status also includes the shipment history.

```
$postnl = new PostNL(...);  
$postnl->getShippingStatusesByBarcodes(['3SDEVC98237423', '3SDEVC98237423']);
```

barcodes

Required: True

The references, e.g.: ['3SDEVC98237423', '3SDEVC98237423']

complete

Required: False

Return the complete shipping status. This includes the shipment history.

Depending on the complete parameter this returns an array with *Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment* or *Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment* objects. The array is an associative array indexed by the given barcodes, e.g.: ['3SDEVC98237423' => CurrentStatusResponseShipment, ...].

Current or complete shipping status by reference

Gets the current or complete status by reference. A complete status also includes the shipment history.

```
$postnl = new PostNL(...);  
$postnl->getShippingStatusByReference('order-12');
```

reference

Required: True

The barcode, e.g.: order-12

complete

Required: False

Return the complete shipping status. This includes the shipment history.

Depending on the complete parameter this returns a *Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment* or a *Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment* object.

Multiple current or complete shipping statuses by references

Gets multiple current or complete statuses by references. A complete status also includes the shipment history.

```
$postnl = new PostNL(...);
$postnl->getShippingStatusesByReferences(['order-12', 'order-16']);
```

barcodes

Required: True

The references, e.g.: ['order-12', 'order-16']

complete

Required: False

Return the complete shipping status. This includes the shipment history.

Depending on the `complete` parameter this returns an array with *Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment* or *Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment* objects. The array is an associative array indexed by the given references, e.g.: ['order-12' => CurrentStatusResponseShipment, ...].

Current status by status code

Warning: This is no longer supported by the PostNL API.

Current status by phase code

Gets the current status by phase code. Note that the date range is required.

Warning: This is no longer supported by the PostNL API

Complete status by status code

Warning: This is no longer supported by the PostNL API.

Complete status by phase code

Warning: This is no longer supported by the PostNL API.

Get a single signature by barcode

Gets the signature of the shipment when available. A signature can be accessed by barcode only.

```
$postnl = new PostNL(...);
$postnl->getSignatureByBarcode('3SDEVC23987423');
```

It accepts the following arguments

barcode

Required: True

The shipment's barcode, e.g. 3SDEVC23987423

This method returns a *Firstred\PostNL\Entity\Response\GetSignatureResponseSignature* object. To get the actual signature in binary format you will have to use:

```
$postnl = new PostNL(...);

$getSignatureResponseSignature = $postnl->getSignatureByBarcode('3SDEVC23987423');
$content = base64_decode($getSignatureResponseSignature->getSignatureImage());

header('Content-Type: image/gif');
echo $content;
exit;
```

Get multiple signatures by barcodes

Gets multiple signatures of multiple shipments, when available.

```
$postnl = new PostNL(...);
$postnl->getSignaturesByBarcodes(['3SDEVC23987423', '3SDEVC23987425']);
```

It accepts the following arguments

barcodes

Required: True

An array of barcodes, e.g. ['3SDEVC23987423', '3SDEVC23987425'].

It returns an array of *Firstred\PostNL\Entity\Response\GetSignatureResponseSignature* objects. To get the image data out of these objects, see *Get a single signature by barcode*.

1.7 Exception handling

The following tree view describes how the exceptions used in this library depend on each other.

```
. Exception : Throwable
├── Firstred\PostNL\Exception\PostNLException
│   ├── Firstred\PostNL\Exception\ApiException
│   │   ├── Firstred\PostNL\Exception\ApiConnectionException
│   │   ├── Firstred\PostNL\Exception\CifDownException
│   │   ├── Firstred\PostNL\Exception\CifException
│   │   ├── Firstred\PostNL\Exception\NotFoundException
│   │   ├── Firstred\PostNL\Exception\ResponseException
│   │   └── Firstred\PostNL\Exception\ShipmentNotFoundException
│   ├── Firstred\PostNL\Exception\HttpClientException
│   └── Firstred\PostNL\Exception\InvalidArgumentException
│       ├── Firstred\PostNL\Exception\InvalidApiModeException
│       ├── Firstred\PostNL\Exception\InvalidBarcodeException
│       ├── Firstred\PostNL\Exception\InvalidConfigurationException
│       ├── Firstred\PostNL\Exception\InvalidMessageTimeStampException
│       ├── Firstred\PostNL\Exception\InvalidMethodException
│       ├── Firstred\PostNL\Exception\NotImplementedException
│       └── Firstred\PostNL\Exception\NotSupportedException
```

1.7.1 Exception types

This library throws several exceptions for errors that can occur. In order to provide harmonized error handling for different API modes, several implementation details are left out. For example, errors related to XML or JSON parsing are wrapped in a *Firstred\PostNL\Exception\ResponseException* exception.

If you want to catch all exceptions thrown by this library be sure to catch *Firstred\PostNL\Exception\PostNLException*s. Under normal conditions there is no need to catch all *Throwable*s. If any other *Throwable* such as *Error*, *TypeError* or *PsrCacheInvalidArgumentException* is uncaught, it means that there is a bug somewhere in the library. Please file a new issue with all the details you can find (preferably with the original request/response [be sure to scrub personal data]): <https://github.com/firstred/postnl-api-php/issues/new>.

```
use Firstred\PostNL\Exception\PostNLException;
use Psr\Cache\InvalidArgumentException as PsrCacheInvalidArgumentException;

try {
    $postnl->getTimeframes(...);
} catch (PostNLException $e) {
    // ...
}
```

Firstred\PostNL\Exception\ApiException

This groups of exceptions occurs when there is something wrong with the way the API returns an object (likely an unsupported feature or structure), when the API has trouble processing data, is either down or the requested object could not be found.

deprecated Firstred\PostNL\Exception\ApiConnectionException

This happens when the HTTP client has a problem connecting with the API. This exception has been replaced by the *Firstred\PostNL\Exception\HttpClientException* exception, which allows you to gather more detailed information.

Firstred\PostNL\Exception\CifDownException

This exception is thrown when the CIF API is down.

Firstred\PostNL\Exception\CifException

When the CIF API itself has a fatal error this exception is thrown.

Firstred\PostNL\Exception\NotFoundException

This exception is thrown when the requested object could not be found.

Firstred\PostNL\Exception\ResponseException

This exception is thrown when a response could not be understood by the library. If there was a problem parsing the response, the previous argument might point at the underlying error.

deprecated

Required: False

deprecated Firstred\PostNL\Exception\ShipmentNotFoundException

Occurs when the requested *Firstred\PostNL\Entity\Shipment* or *Firstred\PostNL\Entity\Response\ResponseShipment* object could not be found. This exception is deprecated and being replaced by a *Firstred\PostNL\Exception\NotFoundException*.

Firstred\PostNL\Exception\HttpClientException

All exceptions that occur in underlying HTTP Clients are handled by *Firstred\PostNL\Exception\HttpClientException* s.

Firstred\PostNL\Exception\InvalidArgumentException

Invalid inputs are handled by the group of *Firstred\PostNL\Exception\InvalidArgumentException* exceptions.

deprecated Firstred\PostNL\Exception\InvalidApiModeException

When an invalid API mode is selected, this exception is thrown. This exception is deprecated, because the ability to select an API mode will be removed in the future.

Firstred\PostNL\Exception\InvalidBarcodeException

This exception is thrown when there is a problem with generating a barcode. Usually caused by invalid input.

Firstred\PostNL\Exception\InvalidConfigurationException

When a problem occurs due to configuration errors, this exception is thrown. For example, an invalid API key.

deprecated Firstred\PostNL\Exception\InvalidMessageTimeStampException

This occurs when a *Firstred\PostNL\Entity\SOAP\Message* has an invalid timestamp. Deprecated, because SOAP support is being removed.

Firstred\PostNL\Exception\InvalidMethodException

This happens when an invalid method has been called.

Firstred\PostNL\Exception\NotImplementedException

When a feature has not been implemented, yet, you will see this exception thrown.

Firstred\PostNL\Exception\NotSupportedException

This occurs when a feature is not supported.

1.8 Formats

The API can be very inconsistent when it comes to returning times and dates, for example. To standardize how some fields are handled, the library uses different formats.

1.8.1 Dates, Times and DateTimes

This library makes a distinction between Dates, Times and DateTimes. To normalize moments in time, this package returns `DateTimeImmutable` objects when referring to a single point in time and uses strings for times.

The following definitions and formats are used:

Dates

Dates refer to a specific moment in time; not specifying the time. Can be formatted as `2020-02-03`. Is always a `DateTimeImmutable` object.

Times

Times refer to a certain moment on any given day. Can be formatted as `12:12:12`. Is always a `string` and should always be formatted using the following [PHP date format](#): `H:i:s` (Hours, minutes and seconds with leading zeros).

DateTimes

DateTimes are referring to a specific date and time. They can be formatted for example as `2021-02-03 12:12:12`. Is always a `DateTimeImmutable` object.

Note: Every `DateTimeImmutable` object and time string returned by the library is adjusted to the timezone of the PostNL API (Europe/Amsterdam). Make sure your timezone is aligned correctly, or otherwise convert dates and times manually by adding/subtracting the time difference.

You can check your PHP's configured timezone by printing the `date.timezone` setting:

```
die(ini_get('date.timezone'));
```

1.8.2 SOAP object structure

Sometimes you will notice that the REST API documentation might return property names in singular whereas the library returns the plural version of a property. This is caused by the fact that the SOAP API returns most properties in plural format. An example is the shipping status service when requesting the current status of a shipment. The SOAP API would return an `addresses` property whereas REST returns `address`. This is automatically converted to the `Firstred\PostNL\Entity\Shipment::$Addresses` property by this library. Therefore, when in doubt, you can safely assume that plural is used.

1.9 HTTP Client

This library supports almost all available HTTP clients. There are several ways to configure the HTTP client that should be used.

If not passed to the `Firstred\PostNL\PostNL` constructor or set with the `Firstred\PostNL\PostNL::setHttpClient` method, the library will automatically check if HTTP clients are available in the following order:

1. Guzzle client
2. HTTPPlug client, an Asynchronous HTTP client, PSR-18 HTTP clients
3. Built-in cURL client

1.9.1 Setting the HTTP client manually

By default the library will use cURL or Guzzle when available. You can always switch HTTP clients as follows:

```
$postnl = new PostNL(...);  
$postnl->setHttpClient(\Firstred\PostNL\HttpClient\CurlClient::getInstance());
```

You can create a custom HTTP Client by implementing the `\Firstred\PostNL\HttpClient\ClientInterface` interface.

1.9.2 Setting the HTTP client with HTTPPlug

Using auto-discovery with HTTPPlug.

The following packages are required if you want to use HTTPPlug:

```
composer require php-http/discovery php-http/httpplug php-http/message-factory psr/  
↳http-factory
```

HTTPPlug + Symfony HTTP Client example

This package already requires a Message factory and HTTP factory implementation (`guzzlehttp/psr7`), so all we need to do is to install the client and its requirements according to the [official Symfony documentation](#):

```
composer require symfony/http-client
```

If you haven't installed Guzzle itself, this library should now auto-detect the Symfony HTTP Client and use it through the HTTPPlug bridge.

If you have installed Guzzle already, then you can still configure the PostNL library to use the Symfony HTTP Client. To do this, pass the new client to the `Firstred\PostNL\PostNL` constructor or `Firstred\PostNL\PostNL::setHttpClient` method. Example:

```
use Symfony\Component\HttpClient\HttpplugClient;
use Firstred\PostNL\HttpClient\HTTPPlugClient;

$symfonyClient = new HttpplugClient();

$httpPlugBridgeClient = new HTTPPlugClient($symfonyClient);

$postnl = new PostNL($customer, null, $httpClient);
```

Note:

A list of HTTP Client supported by HTTPPlug can be found on the following page:
<https://docs.php-http.org/en/latest/clients.html>

1.10 Logging

Requests and responses can be logged for debugging purposes. In order to enable logging you will need to pass a PSR-3 compatible logger.

```
<?php

use League\Flysystem\Adapter\Local;
use League\Flysystem\Filesystem;

use Psr\Log\LogLevel;
use wabbr\Logger;

// Initialize the file system adapter
$logfs = new Filesystem($adapter);

// Set the DEBUG log level
$logger = new Logger($logfs, LogLevel::DEBUG);

// Set the filename format, we're creating one file for every minute of request/
↳ responses
$logger->setFilenameFormat('Y-m-d H:i');

// Set this logger for all services at once
$postnl->setLogger($logger);

// Set the logger for just the Labelling service
$postnl->getLabellingService()->setLogger($logger);
```

Note: This example used the Wabbr logger. You can use any logger you like, as long as it implements the PSR-3 standard. To log all responses the level needs to be set at DEBUG. For error responses you can set the debug level to ERROR.

1.11 Advanced usage

This section describes more advanced ways to use this library. The main class `Firstred\PostNL\PostNL` and separate service classes (such as `Firstred\PostNL\Service\BarcodeService`) provide more ways to interact with the API.

1.11.1 Object instantiation

There are four ways in which entities can be instantiated. Either by

1. passing all arguments to the constructor in the right order
2. or using named parameters,
3. invoking the `create` method on an entity (deprecated since v1.4.0, avoid if you can)
4. or by instantiating an empty entity and calling the setters one by one.

Which method to use is entirely up to you. They are all supported by the library.

However, if you use an IDE with code completion then the safest ways to use are (2) using named parameters (PHP 8) or by calling the setters (4), one by one.

Even without using an editor with code completion you might benefit from using methods (2) and (4) since you will be able to detect errors earlier in the process.

1 - Constructor

```
<?php

use Firstred\PostNL\Entity\Address;
use Firstred\PostNL\Entity\Customer;

// Your PostNL credentials
$customer = new Customer(
    '11223344',
    'DEVC',
    '123456',
    'Sander',
    'test@voorbeeld.nl',
    'Michael',
    new Address(
        '02',
        'PostNL',
        'Siriusdreef',
        '42',
        '2132WT',
        'Hoofddorp',
        'NL',
    ),
);
```

2 - Constructor named args

```
<?php

use Firstred\PostNL\Entity\Address;
use Firstred\PostNL\Entity\Customer;
```

(continues on next page)

(continued from previous page)

```
// Your PostNL credentials
$customer = new Customer(
    CustomerNumber: '11223344',
    CustomerCode: 'DEVC',
    CollectionLocation: '123456',
    ContactPerson: 'Sander',
    Email: 'test@voorbeeld.nl',
    Name: 'Michael',
    Address: new Address(
        AddressType: '02',
        CompanyName: 'PostNL',
        Street: 'Siriusdreef',
        HouseNr: '42',
        Zipcode: '2132WT',
        City: 'Hoofddorp',
        Countrycode: 'NL',
    ),
);
```

3 - Create (deprecated since v1.4.0)

```
<?php

use Firstred\PostNL\Entity\Address;
use Firstred\PostNL\Entity\Customer;

$customer = Customer::create([
    'CustomerNumber' => '11223344',
    'CustomerCode' => 'DEVC',
    'CollectionLocation' => '123456',
    'ContactPerson' => 'Sander',
    'Email' => 'test@voorbeeld.nl',
    'Name' => 'Michael',
    'Address' => Address::create([
        'AddressType' => '02',
        'CompanyName' => 'PostNL',
        'Street' => 'Siriusdreef',
        'HouseNr' => '42',
        'Zipcode' => '2132WT',
        'City' => 'Hoofddorp',
        'Countrycode' => 'NL',
    ]),
]);
```

4 - Setters

```
<?php

use Firstred\PostNL\Entity\Address;
use Firstred\PostNL\Entity\Customer;

$customer = (new Customer())
    ->setCustomerNumber('11223344')
    ->setCustomerCode('DEVC')
    ->setCollectionLocation('123456')
    ->setContactPerson('Sander')
```

(continues on next page)

(continued from previous page)

```
->setEmail('test@voorbeeld.nl')
->setName('Michael')
->setAddress((new Address())
    ->setAddressType('02')
    ->setCompanyName('PostNL')
    ->setStreet('Siriusdreef')
    ->setHouseNr('42')
    ->setZipcode('2132WT')
    ->setCity('Hoofddorp')
    ->setCountrycode('NL')
)
;
```

1.11.2 Building requests manually

For most cases using the API through the (*Firstred\PostNL\PostNL*) object would be sufficient. There might be times, however, when the main class does not align with your use case. This section aims to describe the process that is involved in creating requests, sending them and processing the responses.

Interacting with the API through this library

In the above-mentioned merged label example we are passing two *Firstred\PostNL\Entity\Shipment* objects, filled with the needed information to generate the labels. To merge those labels manually, we have to set the merge option to *false* and can omit both the *format* and *positions* parameters. This will in turn make the library return *Firstred\PostNL\Entity\Response\GenerateLabelResponse* objects.

These are in line with the *Firstred\PostNL\Entity\Response\GenerateLabelResponse* nodes generated by the SOAP API, even when using the REST API. The main reason for this standardization is that the initial version of this library was built for the SOAP API. If you need a quick reference of the *Firstred\PostNL\Entity\Response\GenerateLabelResponse* object, you can either look up the code of the *GenerateLabelResponse* class or navigate to the [API documentation](#) directly.

Sending concurrent requests manually

There is no direct need to manually handle concurrent requests. This library handles most cases automatically and even provides a special function to quickly grab timeframe and location data for frontend delivery options widgets.

In case you manually want to send a custom mix of requests, you can look up the corresponding functions in the Service class of your choice and call the `buildXXXXXXRequest()` functions manually. Thanks to the PSR-7 standard used by this library you can use the *Psr\Http\Message\RequestInterface* object that is returned to access the full request that would otherwise be sent directly. To pick up where you left off you can then grab the response and pass it to one of the `processXXXXXXResponse()` functions of the Service class. The easiest method is to grab the raw HTTP message and parse it with the included PSR-7 library. An example can be found in the [cURL client](#).

Processing Response objects

Note: This section refers to Response objects returned by the library, not the standardized PSR-7 messages.

As soon as you've done your first request with this library, you will find that it returns a Response object. As mentioned in the *Building Requests* section, these Response objects are based on the SOAP API, regardless of the mode set. The properties of a Response object can be looked up in the code, but it can be a bit confusing at times, since the Response object will likely not contain all properties at once. It often depends on the context of the request. For this reason, you're better off by having a look at the [SOAP API documentation](#) directly or by checking out some of the examples in this documentation.

1.12 API Reference

\Firstred\PostNL

1.12.1 Namespaces

Entity

\Firstred\PostNL\Entity

Namespaces

Message

\Firstred\PostNL\Entity\Message

Classes

LabellingMessage

class Firstred\PostNL\Entity\Message\LabellingMessage

Class LabellingMessage.

Parent *Firstred\PostNL\Entity\Message\Message*

Summary

Methods

- *public __construct(\$Printertype, \$MessageID, \$MessageTimeStamp)*

Properties

public property Firstred\PostNL\Entity\Message\LabellingMessage::\$defaultProperties

Type string[][]

protected static property

Firstred\PostNL\Entity\Message\LabellingMessage::\$Printertype

Type string | null

Methods

public Firstred\PostNL\Entity\Message\LabellingMessage::__construct(*\$Printertype*=\'GraphicFile\PDF\',
\$MessageID=null,
\$MessageTimeS-
tamp=null)

LabellingMessage constructor.

Parameters

- **\$Printertype** (string | null)
- **\$MessageID** (string | null)
- **\$MessageTimeStamp** (string | \DateTimeInterface | null)

Throws *\Firstred\PostNL\Exception\InvalidMessageTimeStampException*

Message

class Firstred\PostNL\Entity\Message\Message

Class Message.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$MessageID, \$MessageTimeStamp)*
- *public setMessageTimeStamp(\$MessageTimeStamp)*

Properties

public property Firstred\PostNL\Entity\Message\Message::\$defaultProperties

Type string[][]

protected static property Firstred\PostNL\Entity\Message\Message::\$MessageID

Type string | null

protected static property Firstred\PostNL\Entity\Message\Message::\$MessageTimeStamp

Type string | null

Methods

```
public Firstred\PostNL\Entity\Message\Message::__construct($MessageID=null,  
                                                         $MessageTimeStamp=null)
```

Parameters

- **\$MessageID** (string | null)
- **\$MessageTimeStamp** (string | \DateTimeInterface | null)

Throws [*\Firstred\PostNL\Exception\InvalidMessageTimeStampException*](#)

```
public Firstred\PostNL\Entity\Message\Message::setMessageTimeStamp($MessageTimeStamp=null)
```

Parameters

- **\$MessageTimeStamp** (string | \DateTimeInterface | null)

Returns static

Throws [*\Firstred\PostNL\Exception\InvalidMessageTimeStampException*](#)

Since 1.2.0

Request

\Firstred\PostNL\Entity\Request

Classes

GetLocation

```
class Firstred\PostNL\Entity\Request\GetLocation
```

Class GetLocation.

This class is both the container and can be the actual GetLocation object itself!

Parent [*Firstred\PostNL\Entity\AbstractEntity*](#)

Summary

Methods

- *public __construct(\$LocationCode, \$Message, \$RetailNetworkID)*
- *public getMessage()*
- *public setMessage(\$Message)*

Properties

public property Firstred\PostNL\Entity\Request\GetLocation::\$defaultProperties

Default properties and namespaces for the SOAP API.

Type array

protected static property Firstred\PostNL\Entity\Request\GetLocation::\$LocationCode

Type string | null

protected static property Firstred\PostNL\Entity\Request\GetLocation::\$Message

Type \Firstred\PostNL\Entity\Message\Message | null

Deprecated 1.4.1 SOAP support is going to be removed

protected static property Firstred\PostNL\Entity\Request\GetLocation::\$RetailNetworkID

Type string | null

Methods

public Firstred\PostNL\Entity\Request\GetLocation::__construct(*\$LocationCode=null*,
\$Message=null,
\$RetailNetworkID=null)

GetLocation constructor.

Parameters

- **\$LocationCode** (string | null)
- **\$Message** (*Firstred\PostNL\Entity\Message\Message* | null)
- **\$RetailNetworkID** (string | null)

public Firstred\PostNL\Entity\Request\GetLocation::getMessage()

Returns *\Firstred\PostNL\Entity\Message\Message* | null

Deprecated 1.4.1 SOAP support is going to be removed

public Firstred\PostNL\Entity\Request\GetLocation::setMessage(*\$Message*)

Parameters

- **\$Message** (*Firstred\PostNL\Entity\Message\Message* | null)

Returns static

Deprecated 1.4.1 SOAP support is going to be removed

CompleteStatusByStatus

class Firstred\PostNL\Entity\Request\CompleteStatusByStatus

Class CompleteStatusByStatus.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$Shipment, \$Customer, \$Message)*
- *public xmlSerialize(\$writer)*

Properties

public property

Firstred\PostNL\Entity\Request\CompleteStatusByStatus::\$defaultProperties

Default properties and namespaces for the SOAP API.

Type array

protected static property

Firstred\PostNL\Entity\Request\CompleteStatusByStatus::\$Message

Type *\Firstred\PostNL\Entity\Message\Message* | null

protected static property

Firstred\PostNL\Entity\Request\CompleteStatusByStatus::\$Customer

Type *\Firstred\PostNL\Entity\Customer* | null

protected static property

Firstred\PostNL\Entity\Request\CompleteStatusByStatus::\$Shipment

Type *\Firstred\PostNL\Entity\Shipment* | null

Methods

public Firstred\PostNL\Entity\Request\CompleteStatusByStatus::__construct(*\$Shipment=null*,
\$Customer=null,
\$Message=null)

CompleteStatusByStatus constructor.

Parameters

- **\$Shipment** (*Firstred\PostNL\Entity\Shipment* | null)
- **\$Customer** (*Firstred\PostNL\Entity\Customer* | null)
- **\$Message** (*Firstred\PostNL\Entity\Message\Message* | null)

```
public Firstred\PostNL\Entity\Request\CompleteStatusByStatus::xmlSerialize($writer)
```

Return a serializable array for the XMLWriter.

Parameters

- **\$writer** (Sabre\Xml\Writer)

Returns void

GetSignature

```
class Firstred\PostNL\Entity\Request\GetSignature
```

Class GetSignature.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$Shipment, \$Customer, \$Message)*
- *public getMessage()*
- *public setMessage(\$Message)*
- *public xmlSerialize(\$writer)*

Properties

```
public property Firstred\PostNL\Entity\Request\GetSignature::$defaultProperties
```

Default properties and namespaces for the SOAP API.

Type array

```
protected static property Firstred\PostNL\Entity\Request\GetSignature::$Message
```

Type *\Firstred\PostNL\Entity\Message\Message* | null

Deprecated 1.4.1 SOAP support is going to be removed

```
protected static property Firstred\PostNL\Entity\Request\GetSignature::$Customer
```

Type *\Firstred\PostNL\Entity\Customer* | null

```
protected static property Firstred\PostNL\Entity\Request\GetSignature::$Shipment
```

Type *\Firstred\PostNL\Entity\Shipment* | null

Methods

```
public Firstred\PostNL\Entity\Request\GetSignature::__construct($Shipment=null,  
                                                                $Customer=null,  
                                                                $Message=null)
```

GetSignature constructor.

Parameters

- **\$Shipment** (*Firstred\PostNL\Entity\Shipment* | null)
- **\$Customer** (*Firstred\PostNL\Entity\Customer* | null)
- **\$Message** (*Firstred\PostNL\Entity\Message\Message* | null)

```
public Firstred\PostNL\Entity\Request\GetSignature::getMessage()
```

Returns *\Firstred\PostNL\Entity\Message\Message* | null

Deprecated 1.4.1 SOAP support is going to be removed

```
public Firstred\PostNL\Entity\Request\GetSignature::setMessage($Message)
```

Parameters

- **\$Message** (*Firstred\PostNL\Entity\Message\Message* | null)

Returns *\Firstred\PostNL\Entity\Request\GetSignature*

Deprecated 1.4.1 SOAP support is going to be removed

```
public Firstred\PostNL\Entity\Request\GetSignature::xmlSerialize($writer)
```

Return a serializable array for the XMLWriter.

Parameters

- **\$writer** (Sabre\Xml\Writer)

Returns void

GetSentDate

```
class Firstred\PostNL\Entity\Request\GetSentDate
```

Class GetSentDate.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- `public __construct($AllowSundaySorting, $City, $CountryCode, $HouseNr, $HouseNrExt, $Options, $PostalCode, $DeliveryDate, $Street, $ShippingDuration)`
- `public setDeliveryDate($deliveryDate)`
- `public setPostalCode($postcode)`
- `public setAllowSundaySorting($AllowSundaySorting)`
- `public xmlSerialize($writer)`

Properties

public property Firstred\PostNL\Entity\Request\GetSentDate::\$defaultProperties

Default properties and namespaces for the SOAP API.

Type array

protected static property

Firstred\PostNL\Entity\Request\GetSentDate::\$AllowSundaySorting

Type bool | null

protected static property Firstred\PostNL\Entity\Request\GetSentDate::\$City

Type string | null

protected static property Firstred\PostNL\Entity\Request\GetSentDate::\$CountryCode

Type string | null

protected static property Firstred\PostNL\Entity\Request\GetSentDate::\$DeliveryDate

Type \DateTimeInterface | null

protected static property Firstred\PostNL\Entity\Request\GetSentDate::\$HouseNr

Type string | null

protected static property Firstred\PostNL\Entity\Request\GetSentDate::\$HouseNrExt

Type string | null

protected static property Firstred\PostNL\Entity\Request\GetSentDate::\$Options

Type string[] | null

protected static property Firstred\PostNL\Entity\Request\GetSentDate::\$PostalCode

Type string | null

protected static property

Firstred\PostNL\Entity\Request\GetSentDate::\$ShippingDuration

Type string | null

protected static property Firstred\PostNL\Entity\Request\GetSentDate::\$Street

Type string | null

Methods

```
public Firstred\PostNL\Entity\Request\GetSentDate::__construct($AllowSundaySorting=false,  
    $City=null,  
    $CountryCode=null,  
    $HouseNr=null,  
    $HouseNrExt=null,  
    $Options=null,  
    $PostalCode=null,  
    $DeliveryDate=null,  
    $Street=null,  
    $ShippingDuration=null)
```

GetSentDate constructor.

Parameters

- **\$AllowSundaySorting** (bool | null)
- **\$City** (string | null)
- **\$CountryCode** (string | null)
- **\$HouseNr** (string | null)
- **\$HouseNrExt** (string | null)
- **\$Options** (array | null)
- **\$PostalCode** (string | null)
- **\$DeliveryDate** (DateTimeInterface | string | null)
- **\$Street** (string | null)
- **\$ShippingDuration** (string | null)

Throws [\Firstred\PostNL\Exception\InvalidArgumentException](#)

```
public Firstred\PostNL\Entity\Request\GetSentDate::setDeliveryDate($deliveryDate=null)
```

Parameters

- **\$deliveryDate** (string | \DateTimeInterface | null)

Returns static

Throws [\Firstred\PostNL\Exception\InvalidArgumentException](#)

Since 1.2.0

```
public Firstred\PostNL\Entity\Request\GetSentDate::setPostalCode($postcode=null)
```

Set the postcode.

Parameters

- **\$postcode** (string | null)

Returns static

```
public Firstred\PostNL\Entity\Request\GetSentDate::setAllowSundaySorting($AllowSundaySorting=null)
```

Parameters

- **\$AllowSundaySorting** (string | bool | int | null)

Returns *\Firstred\PostNL\Entity\Request\GetSentDate*

Since 1.0.0

Since 1.0.0

```
public Firstred\PostNL\Entity\Request\GetSentDate::xmlSerialize($writer)
```

Return a serializable array for the XMLWriter.

Parameters

- **\$writer** (Sabre\Xml\Writer)

Returns void

GetLocationsInArea

```
class Firstred\PostNL\Entity\Request\GetLocationsInArea
```

Class GetLocationsInArea.

This class is both the container and can be the actual GetLocationsInArea object itself!

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$Countrycode, \$Location, \$Message)*

Properties

```
public property Firstred\PostNL\Entity\Request\GetLocationsInArea::$defaultProperties
```

Default properties and namespaces for the SOAP API.

Type array

protected static property

```
Firstred\PostNL\Entity\Request\GetLocationsInArea::$Countrycode
```

Type string | null

```
protected static property Firstred\PostNL\Entity\Request\GetLocationsInArea::$Location
```

Type *\Firstred\PostNL\Entity\Location* | null

```
protected static property Firstred\PostNL\Entity\Request\GetLocationsInArea::$Message
```

Type *\Firstred\PostNL\Entity\Message\Message* | null

Deprecated 1.4.1 SOAP support is going to be removed

Methods

```
public Firstred\PostNL\Entity\Request\GetLocationsInArea::__construct($Countrycode=null,  
                                                                    $Location=null,  
                                                                    $Message=null)
```

GetLocationsInArea constructor.

Parameters

- **\$Countrycode** (string | null)
- **\$Location** (*Firstred\PostNL\Entity\Location* | null)
- **\$Message** (*Firstred\PostNL\Entity\Message\Message* | null)

CurrentStatusByPhase

```
class Firstred\PostNL\Entity\Request\CurrentStatusByPhase
```

Class CurrentStatusByPhase.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$Shipment, \$Customer, \$Message)*
- *public xmlSerialize(\$writer)*

Properties

public property

```
Firstred\PostNL\Entity\Request\CurrentStatusByPhase::$defaultProperties
```

Default properties and namespaces for the SOAP API.

Type array

protected static property

```
Firstred\PostNL\Entity\Request\CurrentStatusByPhase::$Message
```

Type *\Firstred\PostNL\Entity\Message\Message* | null

protected static property

```
Firstred\PostNL\Entity\Request\CurrentStatusByPhase::$Customer
```

Type *\Firstred\PostNL\Entity\Customer* | null

protected static property

```
Firstred\PostNL\Entity\Request\CurrentStatusByPhase::$Shipment
```

Type *\Firstred\PostNL\Entity\Shipment* | null

Methods

```
public Firstred\PostNL\Entity\Request\CurrentStatusByPhase::__construct($Shipment=null,  
                                                                    $Customer=null,  
                                                                    $Message=null)
```

CurrentStatusByPhase constructor.

Parameters

- **\$Shipment** (*Firstred\PostNL\Entity\Shipment* | null)
- **\$Customer** (*Firstred\PostNL\Entity\Customer* | null)
- **\$Message** (*Firstred\PostNL\Entity\Message\Message* | null)

```
public Firstred\PostNL\Entity\Request\CurrentStatusByPhase::xmlSerialize($writer)
```

Return a serializable array for the XMLWriter.

Parameters

- **\$writer** (Sabre\Xml\Writer)

Returns void

CurrentStatusByStatus

```
class Firstred\PostNL\Entity\Request\CurrentStatusByStatus
```

Class CurrentStatusByStatus.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$Shipment, \$Customer, \$Message)*
- *public xmlSerialize(\$writer)*

Properties

public property

```
Firstred\PostNL\Entity\Request\CurrentStatusByStatus::$defaultProperties
```

Default properties and namespaces for the SOAP API.

Type array

protected static property

```
Firstred\PostNL\Entity\Request\CurrentStatusByStatus::$Message
```

Type *\Firstred\PostNL\Entity\Message\Message* | null

protected static property**Firstred\PostNL\Entity\Request\CurrentStatusByStatus::\$Customer****Type** *\Firstred\PostNL\Entity\Customer* | null**protected static property****Firstred\PostNL\Entity\Request\CurrentStatusByStatus::\$Shipment****Type** *\Firstred\PostNL\Entity\Shipment* | null**Methods**

```
public Firstred\PostNL\Entity\Request\CurrentStatusByStatus::__construct($Shipment=null,  
                                                                    $Customer=null,  
                                                                    $Message=null)
```

CurrentStatusByStatus constructor.

Parameters

- **\$Shipment** (*Firstred\PostNL\Entity\Shipment* | null)
- **\$Customer** (*Firstred\PostNL\Entity\Customer* | null)
- **\$Message** (*Firstred\PostNL\Entity\Message\Message* | null)

```
public Firstred\PostNL\Entity\Request\CurrentStatusByStatus::xmlSerialize($writer)
```

Return a serializable array for the XMLWriter.

Parameters

- **\$writer** (Sabre\Xml\Writer)

Returns void**GetNearestLocations**

```
class Firstred\PostNL\Entity\Request\GetNearestLocations
```

Class GetNearestLocations.

This class is both the container and can be the actual GetNearestLocations object itself!

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- `public __construct($Countrycode, $Location, $Message)`
- `public getMessage()`
- `public setMessage($Message)`

Properties

public property Firstred\PostNL\Entity\Request\GetNearestLocations::\$defaultProperties

Default properties and namespaces for the SOAP API.

Type array

protected static property

Firstred\PostNL\Entity\Request\GetNearestLocations::\$Countrycode

Type string | null

protected static property

Firstred\PostNL\Entity\Request\GetNearestLocations::\$Location

Type \Firstred\PostNL\Entity\Location | null

protected static property Firstred\PostNL\Entity\Request\GetNearestLocations::\$Message

Type \Firstred\PostNL\Entity\Message\Message | null

Deprecated 1.4.1 SOAP support is going to be removed

Methods

public Firstred\PostNL\Entity\Request\GetNearestLocations::__construct(*\$Countrycode=null*,
\$Location=null,
\$Message=null)

GetNearestLocations constructor.

Parameters

- **\$Countrycode** (string | null)
- **\$Location** (*Firstred\PostNL\Entity\Location* | null)
- **\$Message** (*Firstred\PostNL\Entity\Message\Message* | null)

public Firstred\PostNL\Entity\Request\GetNearestLocations::getMessage()

Returns *\Firstred\PostNL\Entity\Message\Message* | null

Deprecated 1.4.1 SOAP support is going to be removed

public Firstred\PostNL\Entity\Request\GetNearestLocations::setMessage(*\$Message*)

Parameters

- **\$Message** (*Firstred\PostNL\Entity\Message\Message* | null)

Returns static

Deprecated 1.4.1 SOAP support is going to be removed

CompleteStatusByReference

class Firstred\PostNL\Entity\Request\CompleteStatusByReference

Class CompleteStatusByReference.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$Shipment, \$Customer, \$Message)*
- *public getMessage()*
- *public setMessage(\$Message)*
- *public xmlSerialize(\$writer)*

Properties

public property

Firstred\PostNL\Entity\Request\CompleteStatusByReference::\$defaultProperties

Default properties and namespaces for the SOAP API.

Type array

protected static property

Firstred\PostNL\Entity\Request\CompleteStatusByReference::\$Message

Type *\Firstred\PostNL\Entity\Message\Message* | null

Deprecated 1.4.1 SOAP support is going to be removed

protected static property

Firstred\PostNL\Entity\Request\CompleteStatusByReference::\$Customer

Type *\Firstred\PostNL\Entity\Customer* | null

protected static property

Firstred\PostNL\Entity\Request\CompleteStatusByReference::\$Shipment

Type *\Firstred\PostNL\Entity\Shipment* | null

Methods

```
public Firstred\PostNL\Entity\Request\CompleteStatusByReference::__construct($Shipment=null,
                                                                            $Cus-
                                                                              tomer=null,
                                                                              $Mes-
                                                                              sage=null)
```

CompleteStatusByReference constructor.

Parameters

- **\$Shipment** (*Firstred\PostNL\Entity\Shipment* | null)
- **\$Customer** (*Firstred\PostNL\Entity\Customer* | null)
- **\$Message** (*Firstred\PostNL\Entity\Message\Message* | null)

```
public Firstred\PostNL\Entity\Request\CompleteStatusByReference::getMessage()
```

Returns *\Firstred\PostNL\Entity\Message\Message* | null

Deprecated 1.4.1 SOAP support is going to be removed

```
public Firstred\PostNL\Entity\Request\CompleteStatusByReference::setMessage($Message)
```

Parameters

- **\$Message** (*Firstred\PostNL\Entity\Message\Message* | null)

Returns static

Deprecated 1.4.1 SOAP support is going to be removed

```
public Firstred\PostNL\Entity\Request\CompleteStatusByReference::xmlSerialize($writer)
```

Return a serializable array for the XMLWriter.

Parameters

- **\$writer** (*Sabre\Xml\Writer*)

Returns void

CompleteStatus

```
class Firstred\PostNL\Entity\Request\CompleteStatus
```

Class CompleteStatus.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- `public __construct($Shipment, $Customer, $Message)`
- `public xmlSerialize($writer)`
- `public getMessage()`
- `public setMessage($Message)`

Properties

public property Firstred\PostNL\Entity\Request\CompleteStatus::\$defaultProperties

Default properties and namespaces for the SOAP API.

Type array

protected static property Firstred\PostNL\Entity\Request\CompleteStatus::\$Message

Type `\Firstred\PostNL\Entity\Message\Message` | null

Deprecated 1.4.1 SOAP support is going to be removed

protected static property Firstred\PostNL\Entity\Request\CompleteStatus::\$Customer

Type `\Firstred\PostNL\Entity\Customer` | null

protected static property Firstred\PostNL\Entity\Request\CompleteStatus::\$Shipment

Type `\Firstred\PostNL\Entity\Shipment` | null

Methods

public Firstred\PostNL\Entity\Request\CompleteStatus::__construct(*\$Shipment=null*,
\$Customer=null,
\$Message=null)

CompleteStatus constructor.

Parameters

- **\$Shipment** (`Firstred\PostNL\Entity\Shipment` | null)
- **\$Customer** (`Firstred\PostNL\Entity\Customer` | null)
- **\$Message** (`Firstred\PostNL\Entity\Message\Message` | null)

public Firstred\PostNL\Entity\Request\CompleteStatus::xmlSerialize(*\$writer*)

Return a serializable array for the XMLWriter.

Parameters

- **\$writer** (`Sabre\Xml\Writer`)

Returns void

public Firstred\PostNL\Entity\Request\CompleteStatus::getMessage()

Returns \Firstred\PostNL\Entity\Message\Message | null

Deprecated 1.4.1 SOAP support is going to be removed

public Firstred\PostNL\Entity\Request\CompleteStatus::setMessage(\$Message)

Parameters

- **\$Message** (Firstred\PostNL\Entity\Message\Message | null)

Returns static

Deprecated 1.4.1 SOAP support is going to be removed

GetTimeframes

class Firstred\PostNL\Entity\Request\GetTimeframes

Class GetTimeframes.

Parent Firstred\PostNL\Entity\AbstractEntity

Summary

Methods

- **public** __construct(\$Message, \$Timeframes)
- **public** setTimeframe(\$timeframes)
- **public** setTimeframes(\$timeframes)
- **public** getTimeframe()
- **public** getTimeframes()
- **public** getMessage()
- **public** setMessage(\$Message)
- **public** xmlSerialize(\$writer)

Properties

public property Firstred\PostNL\Entity\Request\GetTimeframes::\$defaultProperties

Default properties and namespaces for the SOAP API.

Type array

protected static property Firstred\PostNL\Entity\Request\GetTimeframes::\$Message

Type \Firstred\PostNL\Entity\Message\Message | null

Deprecated 1.4.1 SOAP support is going to be removed

protected static property Firstred\PostNL\Entity\Request\GetTimeframes::\$Timeframe

Type \Firstred\PostNL\Entity\Timeframe[] | null

Methods

```
public Firstred\PostNL\Entity\Request\GetTimeframes::__construct($Message=null,  
                                                                $Timeframes=null)
```

GetTimeframes constructor.

Parameters

- **\$Message** (*Firstred\PostNL\Entity\Message\Message* | null)
- **\$Timeframes** (*Firstred\PostNL\Entity\Timeframe[]* | null)

```
public Firstred\PostNL\Entity\Request\GetTimeframes::setTimeframe($timeframes)
```

Set timeframes

Parameters

- **\$timeframes** (*Firstred\PostNL\Entity\Timeframe* | *\Firstred\PostNL\Entity\Timeframe[]* | null)

Returns \$this

Since 1.0.0

Since 1.0.0

```
public Firstred\PostNL\Entity\Request\GetTimeframes::setTimeframes($timeframes)
```

Set timeframes

Parameters

- **\$timeframes** (*Firstred\PostNL\Entity\Timeframe* | *\Firstred\PostNL\Entity\Timeframe[]* | null)

Returns \$this

Since 1.2.0

```
public Firstred\PostNL\Entity\Request\GetTimeframes::getTimeframe()
```

Get timeframes

Returns *\Firstred\PostNL\Entity\Timeframe[]* | null

```
public Firstred\PostNL\Entity\Request\GetTimeframes::getTimeframes()
```

Get timeframes

Returns *\Firstred\PostNL\Entity\Timeframe[]* | null

Since 1.2.0

```
public Firstred\PostNL\Entity\Request\GetTimeframes::getMessage()
```

Returns *\Firstred\PostNL\Entity\Message\Message* | null

Deprecated 1.4.1 SOAP support is going to be removed

```
public Firstred\PostNL\Entity\Request\GetTimeframes::setMessage($Message)
```

Parameters

- **\$Message** (*Firstred\PostNL\Entity\Message\Message* | null)

Returns static**Deprecated** 1.4.1 SOAP support is going to be removed

```
public Firstred\PostNL\Entity\Request\GetTimeframes::xmlSerialize($writer)
```

Return a serializable array for the XMLWriter.

Parameters

- **\$writer** (*Sabre\Xml\Writer*)

Returns void

CurrentStatusByReference

```
class Firstred\PostNL\Entity\Request\CurrentStatusByReference
```

Class CurrentStatusByReference.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$Shipment, \$Customer, \$Message)*
- *public getMessage()*
- *public setMessage(\$Message)*
- *public xmlSerialize(\$writer)*

Properties

public property

```
Firstred\PostNL\Entity\Request\CurrentStatusByReference::$defaultProperties
```

Default properties and namespaces for the SOAP API.

Type array**protected static property**

```
Firstred\PostNL\Entity\Request\CurrentStatusByReference::$Message
```

Type *\Firstred\PostNL\Entity\Message\Message* | null**Deprecated** 1.4.1 SOAP support is going to be removed**protected static property**

```
Firstred\PostNL\Entity\Request\CurrentStatusByReference::$Customer
```

Type *\Firstred\PostNL\Entity\Customer* | null

protected static property

Firstred\PostNL\Entity\Request\CurrentStatusByReference::\$**Shipment**

Type *\Firstred\PostNL\Entity\Shipment* | null

Methods

```
public Firstred\PostNL\Entity\Request\CurrentStatusByReference::__construct($Shipment=null,  
                                                                    $Cus-  
                                                                    tomer=null,  
                                                                    $Mes-  
                                                                    sage=null)
```

CurrentStatusByReference constructor.

Parameters

- **\$Shipment** (*Firstred\PostNL\Entity\Shipment* | null)
- **\$Customer** (*Firstred\PostNL\Entity\Customer* | null)
- **\$Message** (*Firstred\PostNL\Entity\Message\Message* | null)

```
public Firstred\PostNL\Entity\Request\CurrentStatusByReference::getMessage()
```

Returns *\Firstred\PostNL\Entity\Message\Message* | null

Deprecated 1.4.1 SOAP support is going to be removed

```
public Firstred\PostNL\Entity\Request\CurrentStatusByReference::setMessage($Message)
```

Parameters

- **\$Message** (*Firstred\PostNL\Entity\Message\Message* | null)

Returns static

Deprecated 1.4.1 SOAP support is going to be removed

```
public Firstred\PostNL\Entity\Request\CurrentStatusByReference::xmlSerialize($writer)
```

Return a serializable array for the XMLWriter.

Parameters

- **\$writer** (Sabre\Xml\Writer)

Returns void

GenerateBarcode

```
class Firstred\PostNL\Entity\Request\GenerateBarcode
```

Class GenerateLabel.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- `public __construct($Barcode, $Customer, $Message)`
- `public getMessage()`
- `public setMessage($Message)`

Properties

public property Firstred\PostNL\Entity\Request\GenerateBarcode::\$defaultProperties

Default properties and namespaces for the SOAP API.

Type array

protected static property Firstred\PostNL\Entity\Request\GenerateBarcode::\$Message

Type \Firstred\PostNL\Entity\Message\Message | null

Deprecated 1.4.1 SOAP support is going to be removed

protected static property Firstred\PostNL\Entity\Request\GenerateBarcode::\$Customer

Type \Firstred\PostNL\Entity\Customer | null

protected static property Firstred\PostNL\Entity\Request\GenerateBarcode::\$Barcode

Type \Firstred\PostNL\Entity\Barcode | null

Methods

public Firstred\PostNL\Entity\Request\GenerateBarcode::__construct(*\$Barcode=null*,
\$Customer=null,
\$Message=null)

GenerateBarcode constructor.

Parameters

- **\$Barcode** (*Firstred\PostNL\Entity\Barcode* | null)
- **\$Customer** (*Firstred\PostNL\Entity\Customer* | null)
- **\$Message** (*Firstred\PostNL\Entity\Message\Message* | null)

public Firstred\PostNL\Entity\Request\GenerateBarcode::getMessage()

Returns \Firstred\PostNL\Entity\Message\Message | null

Deprecated 1.4.1 SOAP support is going to be removed

public Firstred\PostNL\Entity\Request\GenerateBarcode::setMessage(*\$Message*)

Parameters

- **\$Message** (*Firstred\PostNL\Entity\Message\Message* | null)

Returns static

Deprecated 1.4.1 SOAP support is going to be removed

CurrentStatus

class Firstred\PostNL\Entity\Request\CurrentStatus

Class CurrentStatus.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$Shipment, \$Customer, \$Message)*
- *public getMessage()*
- *public setMessage(\$Message)*
- *public xmlSerialize(\$writer)*

Properties

public property Firstred\PostNL\Entity\Request\CurrentStatus::\$defaultProperties

Default properties and namespaces for the SOAP API.

Type array

protected static property Firstred\PostNL\Entity\Request\CurrentStatus::\$Message

Type *\Firstred\PostNL\Entity\Message\Message* | null

Deprecated 1.4.1 SOAP support is going to be removed

protected static property Firstred\PostNL\Entity\Request\CurrentStatus::\$Customer

Type *\Firstred\PostNL\Entity\Customer* | null

protected static property Firstred\PostNL\Entity\Request\CurrentStatus::\$Shipment

Type *\Firstred\PostNL\Entity\Shipment* | null

Methods

public Firstred\PostNL\Entity\Request\CurrentStatus::__construct(*\$Shipment=null,*
\$Customer=null,
\$Message=null)

CurrentStatus constructor.

Parameters

- **\$Shipment** (*Firstred\PostNL\Entity\Shipment* | null)
- **\$Customer** (*Firstred\PostNL\Entity\Customer* | null)

- **\$Message** (*Firstred\PostNL\Entity\Message\Message* | null)

public Firstred\PostNL\Entity\Request\CurrentStatus::get**Message**()

Returns *\Firstred\PostNL\Entity\Message\Message* | null

Deprecated 1.4.1 SOAP support is going to be removed

public Firstred\PostNL\Entity\Request\CurrentStatus::set**Message**(\$Message)

Parameters

- **\$Message** (*Firstred\PostNL\Entity\Message\Message* | null)

Returns static

Deprecated 1.4.1 SOAP support is going to be removed

public Firstred\PostNL\Entity\Request\CurrentStatus::xml**Serialize**(\$writer)

Return a serializable array for the XMLWriter.

Parameters

- **\$writer** (Sabre\Xml\Writer)

Returns void

CompleteStatusByPhase

class Firstred\PostNL\Entity\Request\CompleteStatusByPhase

Class CompleteStatusByPhase.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public* __construct(\$Shipment, \$Customer, \$Message)
- *public* xmlSerialize(\$writer)

Properties

public property

Firstred\PostNL\Entity\Request\CompleteStatusByPhase::\$default**Properties**

Default properties and namespaces for the SOAP API.

Type array

protected static property

Firstred\PostNL\Entity\Request\CompleteStatusByPhase::\$**Message**

Type *\Firstred\PostNL\Entity\Message\Message* | null

protected static property**Firstred\PostNL\Entity\Request\CompleteStatusByPhase::\$Customer****Type** *\Firstred\PostNL\Entity\Customer* | null**protected static property****Firstred\PostNL\Entity\Request\CompleteStatusByPhase::\$Shipment****Type** *\Firstred\PostNL\Entity\Shipment* | null**Methods**

```
public Firstred\PostNL\Entity\Request\CompleteStatusByPhase::__construct($Shipment=null,  
                                                                    $Customer=null,  
                                                                    $Message=null)
```

CompleteStatusByPhase constructor.

Parameters

- **\$Shipment** (*Firstred\PostNL\Entity\Shipment* | null)
- **\$Customer** (*Firstred\PostNL\Entity\Customer* | null)
- **\$Message** (*Firstred\PostNL\Entity\Message\Message* | null)

```
public Firstred\PostNL\Entity\Request\CompleteStatusByPhase::xmlSerialize($writer)
```

Return a serializable array for the XMLWriter.

Parameters

- **\$writer** (Sabre\Xml\Writer)

Returns void

GenerateLabel

```
class Firstred\PostNL\Entity\Request\GenerateLabel
```

Class GenerateLabel.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary**Methods**

- *public* __construct(*\$Shipments, \$Message, \$Customer, \$LabelSignature*)
- *public* jsonSerialize()
- *public* xmlSerialize(*\$writer*)

Properties

public property Firstred\PostNL\Entity\Request\GenerateLabel::\$defaultProperties

Default properties and namespaces for the SOAP API.

Type array

protected static property Firstred\PostNL\Entity\Request\GenerateLabel::\$Customer

Type \Firstred\PostNL\Entity\Customer | null

protected static property Firstred\PostNL\Entity\Request\GenerateLabel::\$Message

Type \Firstred\PostNL\Entity\Message\LabellingMessage | null

protected static property Firstred\PostNL\Entity\Request\GenerateLabel::\$Shipments

Type \Firstred\PostNL\Entity\Shipment[] | null

protected static property

Firstred\PostNL\Entity\Request\GenerateLabel::\$LabelSignature

Type string | null

Methods

public Firstred\PostNL\Entity\Request\GenerateLabel::__construct(*\$Shipments=null*,
\$Message=null,
\$Customer=null,
\$LabelSignature=null)

GenerateLabel constructor.

Parameters

- **\$Shipments** (*Firstred\PostNL\Entity\Shipment[]* | null)
- **\$Message** (*Firstred\PostNL\Entity\Message\LabellingMessage* | null)
- **\$Customer** (*Firstred\PostNL\Entity\Customer* | null)
- **\$LabelSignature** (string | null)

public Firstred\PostNL\Entity\Request\GenerateLabel::jsonSerialize()

Return a serializable array for `json\_encode`.

Returns array

public Firstred\PostNL\Entity\Request\GenerateLabel::xmlSerialize(*\$writer*)

Return a serializable array for the XMLWriter.

Parameters

- **\$writer** (Sabre\Xml\Writer)

Returns void

SendShipment

class Firstred\PostNL\Entity\Request\SendShipment

Class SendShipment.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$Shipments, \$Message, \$Customer)*
- *public jsonSerialize()*

Properties

public property Firstred\PostNL\Entity\Request\SendShipment::\$defaultProperties

Type array

protected static property Firstred\PostNL\Entity\Request\SendShipment::\$Customer

Type *\Firstred\PostNL\Entity\Customer* | null

protected static property Firstred\PostNL\Entity\Request\SendShipment::\$Message

Type *\Firstred\PostNL\Entity\Message\LabellingMessage* | null

protected static property Firstred\PostNL\Entity\Request\SendShipment::\$Shipments

Type *\Firstred\PostNL\Entity\Shipment[]* | null

Methods

public Firstred\PostNL\Entity\Request\SendShipment::__construct(*\$Shipments=null,*
\$Message=null,
\$Customer=null)

SendShipment constructor.

Parameters

- **\$Shipments** (*Firstred\PostNL\Entity\Shipment[]* | null)
- **\$Message** (*Firstred\PostNL\Entity\Message\LabellingMessage* | null)
- **\$Customer** (*Firstred\PostNL\Entity\Customer* | null)

public Firstred\PostNL\Entity\Request\SendShipment::jsonSerialize()

Return a serializable array for `json\_encode`.

Returns array

Confirming

class Firstred\PostNL\Entity\Request\Confirming

Class Confirming.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$Shipments, \$Customer, \$Message)*
- *public xmlSerialize(\$writer)*
- *public jsonSerialize()*

Properties

public property Firstred\PostNL\Entity\Request\Confirming::\$defaultProperties

Default properties and namespaces for the SOAP API.

Type array

protected static property Firstred\PostNL\Entity\Request\Confirming::\$Customer

Type *\Firstred\PostNL\Entity\Customer* | null

protected static property Firstred\PostNL\Entity\Request\Confirming::\$Message

Type *\Firstred\PostNL\Entity\Message\Message* | null

protected static property Firstred\PostNL\Entity\Request\Confirming::\$Shipments

Type *\Firstred\PostNL\Entity\Shipment[]* | null

Methods

public Firstred\PostNL\Entity\Request\Confirming::__construct(*\$Shipments=null,*
\$Customer=null,
\$Message=null)

Confirming constructor.

Parameters

- **\$Shipments** (*Firstred\PostNL\Entity\Shipment[]* | null)
- **\$Customer** (*Firstred\PostNL\Entity\Customer* | null)
- **\$Message** (*Firstred\PostNL\Entity\Message\Message* | null)

public Firstred\PostNL\Entity\Request\Confirming::xmlSerialize(*\$writer*)

Return a serializable array for the XMLWriter.

Parameters

- **\$writer** (Sabre\Xml\Writer)

Returns void**public** Firstred\PostNL\Entity\Request\Confirming::jsonSerialize()

Return a serializable array for `json\_encode`.

Returns array**GetDeliveryDate****class** Firstred\PostNL\Entity\Request\GetDeliveryDate

Class GetDeliveryDate.

This class is both the container and can be the actual GetDeliveryDate object itself!

Parent *Firstred\PostNL\Entity\AbstractEntity***Summary****Methods**

- *public __construct(\$AllowSundaySorting, \$City, \$CountryCode, \$CutOffTimes, \$HouseNr, \$HouseNrExt, \$Options, \$OriginCountryCode, \$PostalCode, \$ShippingDate, \$ShippingDuration, \$Street, \$GetDeliveryDate, \$Message)*
- *public setShippingDate(\$shippingDate)*
- *public setPostalCode(\$postcode)*
- *public setAllowSundaySorting(\$AllowSundaySorting)*
- *public getMessage()*
- *public setMessage(\$Message)*
- *public xmlSerialize(\$writer)*

Properties**public property** Firstred\PostNL\Entity\Request\GetDeliveryDate::\$defaultProperties

Default properties and namespaces for the SOAP API.

Type array**protected static property**

Firstred\PostNL\Entity\Request\GetDeliveryDate::\$AllowSundaySorting

Type bool | null**protected static property** Firstred\PostNL\Entity\Request\GetDeliveryDate::\$City

```

        Type string | null
protected static property Firstred\PostNL\Entity\Request\GetDeliveryDate::$CountryCode
        Type string | null
protected static property Firstred\PostNL\Entity\Request\GetDeliveryDate::$CutOffTimes
        Type \Firstred\PostNL\Entity\CutOffTime[] | null
protected static property Firstred\PostNL\Entity\Request\GetDeliveryDate::$HouseNr
        Type string | null
protected static property Firstred\PostNL\Entity\Request\GetDeliveryDate::$HouseNrExt
        Type string | null
protected static property Firstred\PostNL\Entity\Request\GetDeliveryDate::$Options
        Type string[] | null
protected static property
Firstred\PostNL\Entity\Request\GetDeliveryDate::$OriginCountryCode
        Type string | null
protected static property Firstred\PostNL\Entity\Request\GetDeliveryDate::$PostalCode
        Type string | null
protected static property
Firstred\PostNL\Entity\Request\GetDeliveryDate::$ShippingDate
        Type \DateTimeInterface | null
protected static property
Firstred\PostNL\Entity\Request\GetDeliveryDate::$ShippingDuration
        Type string | null
protected static property Firstred\PostNL\Entity\Request\GetDeliveryDate::$Street
        Type string | null
protected static property
Firstred\PostNL\Entity\Request\GetDeliveryDate::$GetDeliveryDate
        Type \Firstred\PostNL\Entity\Request\GetDeliveryDate | null
protected static property Firstred\PostNL\Entity\Request\GetDeliveryDate::$Message
        Type \Firstred\PostNL\Entity\Message\Message | null
Deprecated 1.4.1 SOAP support is going to be removed

```

Methods

```
public Firstred\PostNL\Entity\Request\GetDeliveryDate::__construct($AllowSundaySorting=null,
                                                                    $City=null,
                                                                    $CountryCode=null,
                                                                    $CutOffTimes=null,
                                                                    $HouseNr=null,
                                                                    $HouseNrExt=null,
                                                                    $Options=null, $Origin-
                                                                    CountryCode=null,
                                                                    $PostalCode=null,
                                                                    $ShippingDate=null,
                                                                    $ShippingDura-
                                                                    tion=null, $Street=null,
                                                                    $GetDeliveryDate=null,
                                                                    $Message=null)
```

GetDeliveryDate constructor.

Parameters

- **\$AllowSundaySorting** (bool | null)
- **\$City** (string | null)
- **\$CountryCode** (string | null)
- **\$CutOffTimes** (array | null)
- **\$HouseNr** (string | null)
- **\$HouseNrExt** (string | null)
- **\$Options** (array | null)
- **\$OriginCountryCode** (string | null)
- **\$PostalCode** (string | null)
- **\$ShippingDate** (DateTimeInterface | string | null)
- **\$ShippingDuration** (string | null)
- **\$Street** (string | null)
- **\$GetDeliveryDate** (*Firstred\PostNL\Entity\Request\GetDeliveryDate* | null)
- **\$Message** (*Firstred\PostNL\Entity\Message\Message* | null)

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

```
public Firstred\PostNL\Entity\Request\GetDeliveryDate::setShippingDate($shippingDate=null)
```

Parameters

- **\$shippingDate** (string | \DateTimeInterface | null)

Returns static

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Since 1.2.0

```
public Firstred\PostNL\Entity\Request\GetDeliveryDate::setPostalCode($postcode=null)
```

Set the postcode.

Parameters

- **\$postcode** (string | null)

Returns static

```
public Firstred\PostNL\Entity\Request\GetDeliveryDate::setAllowSundaySorting($AllowSundaySorting=null)
```

Parameters

- **\$AllowSundaySorting** (string | bool | int | null)

Returns `\Firstred\PostNL\Entity\Request\GetDeliveryDate`

Since 1.0.0

Since 1.0.0

```
public Firstred\PostNL\Entity\Request\GetDeliveryDate::getMessage()
```

Returns `\Firstred\PostNL\Entity\Message\Message` | null

Deprecated 1.4.1 SOAP support is going to be removed

```
public Firstred\PostNL\Entity\Request\GetDeliveryDate::setMessage($Message)
```

Parameters

- **\$Message** (`\Firstred\PostNL\Entity\Message\Message` | null)

Returns static

Deprecated 1.4.1 SOAP support is going to be removed

```
public Firstred\PostNL\Entity\Request\GetDeliveryDate::xmlSerialize($writer)
```

Return a serializable array for the XMLWriter.

Parameters

- **\$writer** (Sabre\Xml\Writer)

Returns void

GetSentDateRequest

```
class Firstred\PostNL\Entity\Request\GetSentDateRequest
```

Class GetSentDateRequest.

Parent `\Firstred\PostNL\Entity\AbstractEntity`

Summary

Methods

- `public __construct($GetSentDate, $Message)`
- `public getMessage()`
- `public setMessage($Message)`

Properties

public property Firstred\PostNL\Entity\Request\GetSentDateRequest::\$defaultProperties

Default properties and namespaces for the SOAP API.

Type array

protected static property

Firstred\PostNL\Entity\Request\GetSentDateRequest::\$GetSentDate

Type \Firstred\PostNL\Entity\Request\GetSentDate | null

protected static property Firstred\PostNL\Entity\Request\GetSentDateRequest::\$Message

Type \Firstred\PostNL\Entity\Message\Message | null

Deprecated 1.4.1 SOAP support is going to be removed

Methods

public Firstred\PostNL\Entity\Request\GetSentDateRequest::__construct(*\$GetSentDate=null*,
\$Message=null)

GetSentDate constructor.

Parameters

- **\$GetSentDate** (*Firstred\PostNL\Entity\Request\GetSentDate* | null)
- **\$Message** (*Firstred\PostNL\Entity\Message\Message* | null)

public Firstred\PostNL\Entity\Request\GetSentDateRequest::getMessage()

Returns \Firstred\PostNL\Entity\Message\Message | null

Deprecated 1.4.1 SOAP support is going to be removed

public Firstred\PostNL\Entity\Request\GetSentDateRequest::setMessage(*\$Message*)

Parameters

- **\$Message** (*Firstred\PostNL\Entity\Message\Message* | null)

Returns static

Deprecated 1.4.1 SOAP support is going to be removed

Response

\Firstred\PostNL\Entity\Response

Classes

GetLocationsResult

class Firstred\PostNL\Entity\Response\GetLocationsResult

Class GetLocationsResult.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$ResponseLocation)*
- *public xmlSerialize(\$writer)*

Properties

public property Firstred\PostNL\Entity\Response\GetLocationsResult::\$defaultProperties

Default properties and namespaces for the SOAP API.

Type array

protected static property

Firstred\PostNL\Entity\Response\GetLocationsResult::\$ResponseLocation

Type *\Firstred\PostNL\Entity\Response\ResponseLocation[]* | null

Methods

public Firstred\PostNL\Entity\Response\GetLocationsResult::__construct(*\$ResponseLocation=null*)

GetLocationsResult constructor.

Parameters

- **\$ResponseLocation** (*Firstred\PostNL\Entity\Response\ResponseLocation[]* | null)

public Firstred\PostNL\Entity\Response\GetLocationsResult::xmlSerialize(*\$writer*)

Return a serializable array for the XMLWriter.

Parameters

- **\$writer** (Sabre\Xml\Writer)

Returns void

SignatureResponse

class Firstred\PostNL\Entity\Response\SignatureResponse

Class SignatureResponse.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$Signature)*

Properties

public property Firstred\PostNL\Entity\Response\SignatureResponse::\$defaultProperties

Default properties and namespaces for the SOAP API.

Type array

protected static property

Firstred\PostNL\Entity\Response\SignatureResponse::\$Signature

Type *\Firstred\PostNL\Entity\Signature* | null

Methods

public Firstred\PostNL\Entity\Response\SignatureResponse::__construct(*\$Signature=null*)

SignatureResponse constructor.

Parameters

- **\$Signature** (*Firstred\PostNL\Entity\Signature* | null)

GetNearestLocationsResponse

class Firstred\PostNL\Entity\Response\GetNearestLocationsResponse

Class GetNearestLocationsResponse.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- `public __construct($GetLocationsResult)`
- `public static jsonDeserialize($json)`
- `public jsonSerialize()`

Properties

public property

`Firstred\PostNL\Entity\Response\GetNearestLocationsResponse::$defaultProperties`

Default properties and namespaces for the SOAP API.

Type array

protected static property

`Firstred\PostNL\Entity\Response\GetNearestLocationsResponse::$GetLocationsResult`

Type `\Firstred\PostNL\Entity\Response\GetLocationsResult` | null

Methods

public `Firstred\PostNL\Entity\Response\GetNearestLocationsResponse::__construct($GetLocationsResult=null)`

GetNearestLocationsResponse constructor.

Parameters

- `$GetLocationsResult` (`\Firstred\PostNL\Entity\Response\GetLocationsResult` | null)

public static `Firstred\PostNL\Entity\Response\GetNearestLocationsResponse::jsonDeserialize($json)`

Parameters

- `$json` (stdClass)

Returns `\Firstred\PostNL\Entity\Response\GetNearestLocationsResponse` | `\stdClass` | null

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Since 1.2.0

public `Firstred\PostNL\Entity\Response\GetNearestLocationsResponse::jsonSerialize()`

Return a serializable array for ``json_encode``.

Returns array

ResponseShipment

class Firstred\PostNL\Entity\Response\ResponseShipment

Class ResponseShipment.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$Barcode, \$ProductCodeDelivery, \$Labels, \$DownPartnerBarcode, \$DownPartnerID, \$DownPartnerLocation, \$Warnings, \$CodingText)*

Properties

public property Firstred\PostNL\Entity\Response\ResponseShipment::\$defaultProperties

Type string[][]

protected static property Firstred\PostNL\Entity\Response\ResponseShipment::\$Barcode

Type string | null

protected static property

Firstred\PostNL\Entity\Response\ResponseShipment::\$DownPartnerBarcode

Type string | null

protected static property

Firstred\PostNL\Entity\Response\ResponseShipment::\$DownPartnerID

Type string | null

protected static property

Firstred\PostNL\Entity\Response\ResponseShipment::\$DownPartnerLocation

Type string | null

protected static property Firstred\PostNL\Entity\Response\ResponseShipment::\$Labels

Type \Firstred\PostNL\Entity\Label[] | null

protected static property

Firstred\PostNL\Entity\Response\ResponseShipment::\$ProductCodeDelivery

Type string | null

protected static property Firstred\PostNL\Entity\Response\ResponseShipment::\$Warnings

Type \Firstred\PostNL\Entity\Warning[] | null

protected static property

Firstred\PostNL\Entity\Response\ResponseShipment::\$CodingText

Type string | null

Methods

```
public Firstred\PostNL\Entity\Response\ResponseShipment::__construct($Barcode=null,
                                                                    $ProductCodeDelivery=null,
                                                                    $Labels=null,
                                                                    $DownPartnerBarcode=null,
                                                                    $DownPartnerID=null,
                                                                    $DownPartnerLocation=null,
                                                                    $Warnings=null,
                                                                    $CodingText=null)
```

Parameters

- **\$Barcode** (string | null)
- **\$ProductCodeDelivery** (string | null)
- **\$Labels** (*Firstred\PostNL\Entity\Label[]* | null)
- **\$DownPartnerBarcode** (string | null)
- **\$DownPartnerID** (string | null)
- **\$DownPartnerLocation** (string | null)
- **\$Warnings** (*Firstred\PostNL\Entity\Warning[]* | null)
- **\$CodingText** (string | null)

CompleteStatusResponseEvent

```
class Firstred\PostNL\Entity\Response\CompleteStatusResponseEvent
```

Class CompleteStatusResponseEvent.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$Code, \$Description, \$DestinationLocationCode, \$LocationCode, \$RouteCode, \$RouteName, \$TimeStamp)*
- *public setTimeStamp(\$TimeStamp)*

Properties

public property

Firstred\PostNL\Entity\Response\CompleteStatusResponseEvent::\$defaultProperties

Default properties and namespaces for the SOAP API.

Type array

protected static property

Firstred\PostNL\Entity\Response\CompleteStatusResponseEvent::\$Code

Type string | null

protected static property

Firstred\PostNL\Entity\Response\CompleteStatusResponseEvent::\$Description

Type string | null

protected static property

Firstred\PostNL\Entity\Response\CompleteStatusResponseEvent::\$DestinationLocationCode

Type string | null

protected static property

Firstred\PostNL\Entity\Response\CompleteStatusResponseEvent::\$LocationCode

Type string | null

protected static property

Firstred\PostNL\Entity\Response\CompleteStatusResponseEvent::\$RouteCode

Type string | null

protected static property

Firstred\PostNL\Entity\Response\CompleteStatusResponseEvent::\$RouteName

Type string | null

protected static property

Firstred\PostNL\Entity\Response\CompleteStatusResponseEvent::\$TimeStamp

Type string | null

Methods

```
public Firstred\PostNL\Entity\Response\CompleteStatusResponseEvent::__construct($Code=null,
                                                                                   $De-
                                                                                   scrip-
                                                                                   tion=null,
                                                                                   $Desti-
                                                                                   nation-
                                                                                   Loca-
                                                                                   tion-
                                                                                   Code=null,
                                                                                   $Loca-
                                                                                   tion-
                                                                                   Code=null,
                                                                                   $Route-
                                                                                   Code=null,
                                                                                   $Route-
                                                                                   Name=null,
                                                                                   $TimeS-
                                                                                   tamp=null)
```

CompleteStatusResponseEvent constructor.

Parameters

- **\$Code** (string | null)
- **\$Description** (string | null)
- **\$DestinationLocationCode** (string | null)
- **\$LocationCode** (string | null)
- **\$RouteCode** (string | null)
- **\$RouteName** (string | null)
- **\$TimeStamp** (string | null)

Throws [*\Firstred\PostNL\Exception\InvalidArgumentException*](#)

```
public Firstred\PostNL\Entity\Response\CompleteStatusResponseEvent::setTimeStamp($TimeStamp=null)
```

Parameters

- **\$TimeStamp** (string | \DateTimeInterface | null)

Returns static

Throws [*\Firstred\PostNL\Exception\InvalidArgumentException*](#)

Since 1.2.0

ResponseTimeframes

class Firstred\PostNL\Entity\Response\ResponseTimeframes

Class ResponseTimeframes.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$ReasonNoTimeframes, \$Timeframes)*
- *public jsonSerialize()*

Properties

public property Firstred\PostNL\Entity\Response\ResponseTimeframes::\$defaultProperties

Type array

protected static property

Firstred\PostNL\Entity\Response\ResponseTimeframes::\$ReasonNoTimeframes

Type *\Firstred\PostNL\Entity\ReasonNoTimeframe[]* | null

protected static property

Firstred\PostNL\Entity\Response\ResponseTimeframes::\$Timeframes

Type *\Firstred\PostNL\Entity\Timeframe[]* | null

Methods

public Firstred\PostNL\Entity\Response\ResponseTimeframes::__construct(*\$ReasonNoTimeframes=null*,
\$Timeframes=null)

Parameters

- **\$ReasonNoTimeframes** (*Firstred\PostNL\Entity\ReasonNoTimeframe[]* | null)
- **\$Timeframes** (*Firstred\PostNL\Entity\Timeframe[]* | null)

public Firstred\PostNL\Entity\Response\ResponseTimeframes::jsonSerialize()

Return a serializable array for `json\_encode`.

Returns array

CompleteStatusResponseShipment

class Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment

Class CompleteStatusResponseShipment.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$Addresses, \$Amounts, \$Barcode, \$Customer, \$DeliveryDate, \$Dimension, \$Events, \$Expectation, \$Groups, \$OldStatuses, \$ProductCode, \$ProductOptions, \$Reference, \$Status, \$Warnings, \$MainBarcode, \$ShipmentAmount, \$ShipmentCounter, \$ProductDescription)*
- *public setDeliveryDate(\$deliveryDate)*
- *public static jsonDeserialize(\$json)*
- *public xmlSerialize(\$writer)*

Properties

public property

Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment::\$defaultProperties

Type string[][]

protected static property

Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment::\$Addresses

Type \Firstred\PostNL\Entity\Response\StatusAddress[] | null

protected static property

Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment::\$Amounts

Type \Firstred\PostNL\Entity\Amount[] | null

protected static property

Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment::\$Barcode

Type \Firstred\PostNL\Entity\Barcode | null

protected static property

Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment::\$Customer

Type \Firstred\PostNL\Entity\Customer | null

protected static property

Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment::\$DeliveryDate

Type \DateTimeInterface | null

protected static property

Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment::\$Dimension

Type \Firstred\PostNL\Entity\Dimension | null Dimension

protected static property

Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment::\$Events

Type \Firstred\PostNL\Entity\Response\CompleteStatusResponseEvent[] | null

protected static property

Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment::\$Expectation

Type `\Firstred\PostNL\Entity\Expectation` | null

protected static property

Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment::\$Groups

Type `\Firstred\PostNL\Entity\Group[]` | null

protected static property

Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment::\$MainBarcode

Type string | null

protected static property

Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment::\$OldStatuses

Type `\Firstred\PostNL\Entity\Response\CompleteStatusResponseOldStatus[]` | null

protected static property

Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment::\$ProductCode

Type string | null

protected static property

Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment::\$ProductDescription

Type string | null

protected static property

Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment::\$ProductOptions

Type `\Firstred\PostNL\Entity\ProductOption[]` | null

protected static property

Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment::\$Reference

Type string | null

protected static property

Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment::\$ShipmentAmount

Type string | null

protected static property

Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment::\$ShipmentCounter

Type string | null

protected static property

Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment::\$Status

Type `\Firstred\PostNL\Entity>Status` | null

protected static property

Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment::\$Warnings

Type `\Firstred\PostNL\Entity\Warning[]` | null

Methods

```
public Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment::__construct($Addresses=null,
                                          $Amounts=null,
                                          $Barcode=null,
                                          $Customer=null,
                                          $DeliveryAddress=null,
                                          $DeliveryDate=null,
                                          $Dimension=null,
                                          $Events=null,
                                          $Expectation=null,
                                          $Groups=null,
                                          $OldStatuses=null,
                                          $ProductCode=null,
                                          $ProductionOptions=null,
                                          $Reference=null,
                                          $Status=null,
                                          $Warnings=null,
                                          $MainBarcode=null,
                                          $ShipmentAmountCounter=null,
                                          $ProductDescription=null)
```

CompleteStatusResponseShipment constructor.

Parameters

- **\$Addresses** (*Firstred\PostNL\Entity\Response\StatusAddress[]* | null)
- **\$Amounts** (*Firstred\PostNL\Entity\Amount[]* | null)
- **\$Barcode** (string | null)
- **\$Customer** (*Firstred\PostNL\Entity\Customer* | null)
- **\$DeliveryDate** (DateTimeInterface | string | null)
- **\$Dimension** (*Firstred\PostNL\Entity\Dimension* | null)
- **\$Events** (*Firstred\PostNL\Entity\Response\CompleteStatusResponseEvent[]* | null)
- **\$Expectation** (*Firstred\PostNL\Entity\Expectation* | null)
- **\$Groups** (*Firstred\PostNL\Entity\Group[]* | null)
- **\$OldStatuses** (*Firstred\PostNL\Entity\Response\CompleteStatusResponseOldStatus[]* | null)
- **\$ProductCode** (string | null)
- **\$ProductOptions** (*Firstred\PostNL\Entity\ProductOption[]* | null)
- **\$Reference** (string | null)
- **\$Status** (*Firstred\PostNL\Entity>Status* | null)
- **\$Warnings** (*Firstred\PostNL\Entity\Warning[]* | null)
- **\$MainBarcode** (string | null)
- **\$ShipmentAmount** (string | null)
- **\$ShipmentCounter** (string | null)
- **\$ProductDescription** (string | null)

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

```
public Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment::setDeliveryDate($deliveryDate=n
```

Parameters

- **\$deliveryDate** (string | \DateTimeInterface | null)

Returns static

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Since 1.2.0

```
public static Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment::jsonDeserialize($json)
```

Parameters

- **\$json** (stdClass)

Returns mixed | \stdClass | null

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Since 1.2.0

```
public Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment::xmlSerialize($writer)
```

Return a serializable array for the XMLWriter.

Parameters

- **\$writer** (Sabre\Xml\Writer)

Returns void

ResponseGroup

```
class Firstred\PostNL\Entity\Response\ResponseGroup
```

Class ResponseGroup.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$GroupCount, \$GroupSequence, \$GroupType, \$MainBarcode)*

Properties

```
public property Firstred\PostNL\Entity\Response\ResponseGroup::$defaultProperties
```

Type string[][]

```
protected static property Firstred\PostNL\Entity\Response\ResponseGroup::$GroupCount
```

Amount of shipments in the ResponseGroup.

Type string | null

```
protected static property
```

```
Firstred\PostNL\Entity\Response\ResponseGroup::$GroupSequence
```

Sequence number.

Type string | null

```
protected static property Firstred\PostNL\Entity\Response\ResponseGroup::$GroupType
```

The type of Group.

Possible values:

- `01`: Collection request
- `03`: Multiple parcels in one shipment (multi-colli)
- `04`: Single parcel in one shipment

Type string | null

protected static property Firstred\PostNL\Entity\Response\ResponseGroup::\$MainBarcode

Main barcode for the shipment.

Type string | null

Methods

public Firstred\PostNL\Entity\Response\ResponseGroup::__construct(*\$GroupCount=null*,
\$GroupSequence=null,
\$GroupType=null,
\$MainBarcode=null)

ResponseGroup Constructor.

Parameters

- **\$GroupCount** (string | null)
- **\$GroupSequence** (string | null)
- **\$GroupType** (string | null)
- **\$MainBarcode** (string | null)

GenerateBarcodeResponse

class Firstred\PostNL\Entity\Response\GenerateBarcodeResponse

Class GenerateBarcodeResponse.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$Barcode)*

Properties

public property

Firstred\PostNL\Entity\Response\GenerateBarcodeResponse::\$defaultProperties

Default properties and namespaces for the SOAP API.

Type array

protected static property

Firstred\PostNL\Entity\Response\GenerateBarcodeResponse::\$Barcode

Type string | null

Methods

public Firstred\PostNL\Entity\Response\GenerateBarcodeResponse::__construct(*\$Barcode=null*)

GenerateBarcodeResponse constructor.

Parameters

- **\$Barcode** (string | null)

GetLocationsInAreaResponse

class Firstred\PostNL\Entity\Response\GetLocationsInAreaResponse

Class GetLocationsInAreaResponse.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$GetLocationsResult)*
- *public jsonSerialize()*

Properties

public property

Firstred\PostNL\Entity\Response\GetLocationsInAreaResponse::\$defaultProperties

Default properties and namespaces for the SOAP API.

Type array

protected static property

Firstred\PostNL\Entity\Response\GetLocationsInAreaResponse::\$GetLocationsResult

Type *\Firstred\PostNL\Entity\Response\GetLocationsResult* | null

Methods

public Firstred\PostNL\Entity\Response\GetLocationsInAreaResponse::__construct(*\$GetLocationsResult=null*)

GetLocationsInAreaResponse constructor.

Parameters

- **\$GetLocationsResult** (*Firstred\PostNL\Entity\Response\GetLocationsResult* | null)

public Firstred\PostNL\Entity\Response\GetLocationsInAreaResponse::jsonSerialize()

Return a serializable array for `json\_encode`.

Returns array

CurrentStatusResponse

class Firstred\PostNL\Entity\Response\CurrentStatusResponse

Class CurrentStatusResponse.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$Shipments, \$Warnings)*
- *public xmlSerialize(\$writer)*

Properties

public property

Firstred\PostNL\Entity\Response\CurrentStatusResponse::\$defaultProperties

Default properties and namespaces for the SOAP API.

Type array

protected static property

Firstred\PostNL\Entity\Response\CurrentStatusResponse::\$Shipments

Type *\Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment[]* | null

protected static property

Firstred\PostNL\Entity\Response\CurrentStatusResponse::\$Warnings

Type *\Firstred\PostNL\Entity\Warning[]* | null

Methods

public Firstred\PostNL\Entity\Response\CurrentStatusResponse::__construct(*\$Shipments=null, \$Warnings=null*)

CurrentStatusResponse constructor.

Parameters

- **\$Shipments** (*Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment[]* | null)
- **\$Warnings** (*Firstred\PostNL\Entity\Warning[]* | null)

public Firstred\PostNL\Entity\Response\CurrentStatusResponse::xmlSerialize(*\$writer*)

Return a serializable array for the XMLWriter.

Parameters

- **\$writer** (Sabre\Xml\Writer)

Returns void

CompleteStatusResponse

class Firstred\PostNL\Entity\Response\CompleteStatusResponse

Class CompleteStatusResponse.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$Shipments, \$Warnings)*
- *public static jsonDeserialize(\$json)*
- *public xmlSerialize(\$writer)*

Properties

public property

Firstred\PostNL\Entity\Response\CompleteStatusResponse::\$defaultProperties

Default properties and namespaces for the SOAP API.

Type array

protected static property

Firstred\PostNL\Entity\Response\CompleteStatusResponse::\$Shipments

Type *\Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment[]* | null

protected static property

Firstred\PostNL\Entity\Response\CompleteStatusResponse::\$Warnings

Type *\Firstred\PostNL\Entity\Warning[]* | null

Methods

public Firstred\PostNL\Entity\Response\CompleteStatusResponse::__construct(*\$Shipments=null, \$Warnings=null*)

CompleteStatusResponse constructor.

Parameters

- **\$Shipments** (*Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment[]* | null)

- **\$Warnings** (Firstred\PostNL\Entity\Response\Warnings[] | null)

```
public static Firstred\PostNL\Entity\Response\CompleteStatusResponse::jsonDeserialize($json)
```

```
public Firstred\PostNL\Entity\Response\CompleteStatusResponse::xmlSerialize($writer)
```

Return a serializable array for the XMLWriter.

Parameters

- **\$writer** (Sabre\Xml\Writer)

Returns void

ResponseLocation

```
class Firstred\PostNL\Entity\Response\ResponseLocation
```

Class ResponseLocation.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$Address, \$DeliveryOptions, \$Distance, \$Latitude, \$Longitude, \$Name, \$OpeningHours, \$PartnerName, \$PhoneNumber, \$LocationCode, \$RetailNetworkID, \$Saleschannel, \$TerminalType, \$Warnings, \$DownPartnerID, \$DownPartnerLocation, \$Sustainability)*
- *public static jsonDeserialize(\$json)*

Properties

```
public property Firstred\PostNL\Entity\Response\ResponseLocation::$defaultProperties
```

Default properties and namespaces for the SOAP API.

Type array

```
protected static property Firstred\PostNL\Entity\Response\ResponseLocation::$Address
```

Type *\Firstred\PostNL\Entity\Address* | null

```
protected static property
```

```
Firstred\PostNL\Entity\Response\ResponseLocation::$DeliveryOptions
```

Type string[] | null

```
protected static property Firstred\PostNL\Entity\Response\ResponseLocation::$Distance
```

Type string | null

```
protected static property Firstred\PostNL\Entity\Response\ResponseLocation::$Latitude
```

Type string | null

```
protected static property Firstred\PostNL\Entity\Response\ResponseLocation::$Longitude
```

Type string | null

protected static property Firstred\PostNL\Entity\Response\ResponseLocation::\$Name

Type string | null

protected static property

Firstred\PostNL\Entity\Response\ResponseLocation::\$OpeningHours

Type \Firstred\PostNL\Entity\OpeningHours | null

protected static property

Firstred\PostNL\Entity\Response\ResponseLocation::\$PartnerName

Type string | null

protected static property

Firstred\PostNL\Entity\Response\ResponseLocation::\$PhoneNumber

Type string | null

protected static property

Firstred\PostNL\Entity\Response\ResponseLocation::\$LocationCode

Type string | null

protected static property

Firstred\PostNL\Entity\Response\ResponseLocation::\$RetailNetworkID

Type string | null

protected static property

Firstred\PostNL\Entity\Response\ResponseLocation::\$Saleschannel

Type string | null

protected static property

Firstred\PostNL\Entity\Response\ResponseLocation::\$TerminalType

Type string | null

protected static property Firstred\PostNL\Entity\Response\ResponseLocation::\$Warnings

Type \Firstred\PostNL\Entity\Warning[] | null

protected static property

Firstred\PostNL\Entity\Response\ResponseLocation::\$DownPartnerID

Type string | null

protected static property

Firstred\PostNL\Entity\Response\ResponseLocation::\$DownPartnerLocation

Type string | null

protected static property

Firstred\PostNL\Entity\Response\ResponseLocation::\$Sustainability

Type \Firstred\PostNL\Entity\Sustainability | null

Methods

```
public Firstred\PostNL\Entity\Response\ResponseLocation::__construct($Address=null, $DeliveryOptions=null,
                                                                    $Distance=null,
                                                                    $Latitude=null,
                                                                    $Longitude=null,
                                                                    $Name=null,
                                                                    $OpeningHours=null,
                                                                    $PartnerName=null,
                                                                    $PhoneNumber=null,
                                                                    $LocationCode=null,
                                                                    $RetailNetworkID=null,
                                                                    $Saleschannel=null,
                                                                    $TerminalType=null,
                                                                    $Warnings=null,
                                                                    $DownPartnerID=null,
                                                                    $DownPartnerLocation=null,
                                                                    $Sustainability=null)
```

ResponseLocation constructor.

Parameters

- **\$Address** (*Firstred\PostNL\Entity\Address* | null)
- **\$DeliveryOptions** (string[] | null)
- **\$Distance** (string | null)
- **\$Latitude** (string | null)
- **\$Longitude** (string | null)
- **\$Name** (string | null)
- **\$OpeningHours** (string[] | null)
- **\$PartnerName** (string | null)
- **\$PhoneNumber** (string | null)
- **\$LocationCode** (string | null)
- **\$RetailNetworkID** (string | null)
- **\$Saleschannel** (string | null)
- **\$TerminalType** (string | null)
- **\$Warnings** (*Firstred\PostNL\Entity\Warning*[] | null)
- **\$DownPartnerID** (string | null)
- **\$DownPartnerLocation** (string | null)
- **\$Sustainability** (*Firstred\PostNL\Entity\Sustainability* | null)

```
public static Firstred\PostNL\Entity\Response\ResponseLocation::jsonDeserialize($json)
```

MergedLabel

```
class Firstred\PostNL\Entity\Response\MergedLabel
```

Class MergedLabel.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$Barcodes, \$Labels)*

Properties

```
public property Firstred\PostNL\Entity\Response\MergedLabel::$defaultProperties
```

Type string[][]

```
protected static property Firstred\PostNL\Entity\Response\MergedLabel::$Barcodes
```

Type string[] | null

```
protected static property Firstred\PostNL\Entity\Response\MergedLabel::$Labels
```

Type *\Firstred\PostNL\Entity\Label[]* | null

Methods

```
public Firstred\PostNL\Entity\Response\MergedLabel::__construct($Barcodes=null,  
                                                                $Labels=null)
```

Parameters

- **\$Barcodes** (string[] | null)
- **\$Labels** (*Firstred\PostNL\Entity\Label[]* | null)

GetSentDateResponse

```
class Firstred\PostNL\Entity\Response\GetSentDateResponse
```

Class GetSentDateResponse.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- `public __construct($GetSentDate, $Options)`
- `public setSentDate($SentDate)`
- `public xmlSerialize($writer)`

Properties

public property

Firstred\PostNL\Entity\Response\GetSentDateResponse::\$defaultProperties

Default properties and namespaces for the SOAP API.

Type array

protected static property

Firstred\PostNL\Entity\Response\GetSentDateResponse::\$SentDate

Type \DateTimeInterface | null

protected static property

Firstred\PostNL\Entity\Response\GetSentDateResponse::\$Options

Type string[] | null

Methods

public Firstred\PostNL\Entity\Response\GetSentDateResponse::__construct(*\$GetSentDate=null*,
\$Options=null)

GetSentDateResponse constructor.

Parameters

- **\$GetSentDate** (DateTimeInterface | string | null)
- **\$Options** (string[] | null)

Throws [\Firstred\PostNL\Exception\InvalidArgumentException](#)

public Firstred\PostNL\Entity\Response\GetSentDateResponse::setSentDate(*\$SentDate=null*)

Parameters

- **\$SentDate** (string | \DateTimeInterface | null)

Returns static

Throws [\Firstred\PostNL\Exception\InvalidArgumentException](#)

Since 1.2.0

public Firstred\PostNL\Entity\Response\GetSentDateResponse::xmlSerialize(*\$writer*)

Return a serializable array for the XMLWriter.

Parameters

- `$writer` (Sabre\Xml\Writer)

Returns void

UpdatedShipmentsResponse

class Firstred\PostNL\Entity\Response\UpdatedShipmentsResponse

Class CompleteStatusResponse.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$Barcode, \$CreationDate, \$CustomerNumber, \$CustomerCode, \$Status)*
- *public setCreationDate(\$CreationDate)*

Properties

public property

Firstred\PostNL\Entity\Response\UpdatedShipmentsResponse::\$defaultProperties

Default properties and namespaces for the SOAP API.

Type array

protected static property

Firstred\PostNL\Entity\Response\UpdatedShipmentsResponse::\$Barcode

Type string | null

protected static property

Firstred\PostNL\Entity\Response\UpdatedShipmentsResponse::\$CreationDate

Type \DateTimeInterface | null

protected static property

Firstred\PostNL\Entity\Response\UpdatedShipmentsResponse::\$CustomerNumber

Type string | null

protected static property

Firstred\PostNL\Entity\Response\UpdatedShipmentsResponse::\$CustomerCode

Type string | null

protected static property

Firstred\PostNL\Entity\Response\UpdatedShipmentsResponse::\$Status

Type *Firstred\PostNL\Entity>Status* | null

Methods

```
public Firstred\PostNL\Entity\Response\UpdatedShipmentsResponse::__construct($Barcode=null,
                                                                              $Creation-
                                                                              Date=null,
                                                                              $Customer-
                                                                              Num-
                                                                              ber=null,
                                                                              $Customer-
                                                                              Code=null,
                                                                              $Sta-
                                                                              tus=null)
```

UpdatedShipmentsResponse constructor.

Parameters

- **\$Barcode** (string | null)
- **\$CreationDate** (string | \DateTimeInterface | null)
- **\$CustomerNumber** (string | null)
- **\$CustomerCode** (string | null)
- **\$Status** (*Firstred\PostNL\Entity>Status* | null)

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

```
public Firstred\PostNL\Entity\Response\UpdatedShipmentsResponse::setCreationDate($CreationDate=null)
```

Parameters

- **\$CreationDate** (string | \DateTimeInterface | null)

Returns static

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Since 1.2.0

GetSignatureResponseSignature

```
class Firstred\PostNL\Entity\Response\GetSignatureResponseSignature
```

Class GetSignatureResponseSignature.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- `public __construct($Barcode, $SignatureDate, $SignatureImage)`
- `public setSignatureDate($SignatureDate)`

Properties

public property

Firstred\PostNL\Entity\Response\GetSignatureResponseSignature::\$defaultProperties

Default properties and namespaces for the SOAP API.

Type array

protected static property

Firstred\PostNL\Entity\Response\GetSignatureResponseSignature::\$Barcode

Type string | null

protected static property

Firstred\PostNL\Entity\Response\GetSignatureResponseSignature::\$SignatureDate

Type string | null

protected static property

Firstred\PostNL\Entity\Response\GetSignatureResponseSignature::\$SignatureImage

Type string | null

Methods

```
public Firstred\PostNL\Entity\Response\GetSignatureResponseSignature::__construct($Barcode=null,
                                                                                    $Sig-
na-
ture-
Date=null,
                                                                                    $Sig-
na-
tureIm-
age=null)
```

GetSignatureResponseSignature constructor.

Parameters

- **\$Barcode** (string | null)
- **\$SignatureDate** (string | null)
- **\$SignatureImage** (string | null)

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

```
public Firstred\PostNL\Entity\Response\GetSignatureResponseSignature::setSignatureDate($SignatureDate=
```

Parameters

- **\$SignatureDate** (string | \DateTimeInterface | null)

Returns static

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Since 1.2.0

ResponseAmount

class Firstred\PostNL\Entity\Response\ResponseAmount

Class ResponseAmount.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$AccountName, \$ResponseAmount, \$BIC, \$Currency, \$IBAN, \$Reference, \$TransactionNumber, \$Value, \$VerzekerdBedrag)*

Properties

public property Firstred\PostNL\Entity\Response\ResponseAmount::\$defaultProperties

Type string[][]

protected static property Firstred\PostNL\Entity\Response\ResponseAmount::\$AccountName

Type string | null

protected static property

Firstred\PostNL\Entity\Response\ResponseAmount::\$ResponseAmountType

Type string | null

protected static property Firstred\PostNL\Entity\Response\ResponseAmount::\$BIC

Type string | null

protected static property Firstred\PostNL\Entity\Response\ResponseAmount::\$Currency

Type string | null

protected static property Firstred\PostNL\Entity\Response\ResponseAmount::\$IBAN

Type string | null

protected static property Firstred\PostNL\Entity\Response\ResponseAmount::\$Reference

Type string | null

protected static property

Firstred\PostNL\Entity\Response\ResponseAmount::\$TransactionNumber

Type string | null

protected static property Firstred\PostNL\Entity\Response\ResponseAmount::\$Value

Type string | null

protected static property

Firstred\PostNL\Entity\Response\ResponseAmount::\$VerzekerdBedrag

Type string | null

Methods

```
public Firstred\PostNL\Entity\Response\ResponseAmount::__construct($AccountName=null,  
                                                                    $ResponseAmount=null,  
                                                                    $BIC=null,  
                                                                    $Currency=null,  
                                                                    $IBAN=null,  
                                                                    $Reference=null,  
                                                                    $TransactionNum-  
                                                                    ber=null, $Value=null,  
                                                                    $Verzek-  
                                                                    erdBedrag=null)
```

Parameters

- **\$AccountName** (string | null)
- **\$ResponseAmount** (string | null)
- **\$BIC** (string | null)
- **\$Currency** (string | null)
- **\$IBAN** (string | null)
- **\$Reference** (string | null)
- **\$TransactionNumber** (string | null)
- **\$Value** (string | null)
- **\$VerzekerdBedrag** (string | null)

GenerateLabelResponse

```
class Firstred\PostNL\Entity\Response\GenerateLabelResponse
```

Class GenerateLabelResponse.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(*\$MergedLabels, \$ReponseShipments*)*

Properties

public property

`Firstred\PostNL\Entity\Response\GenerateLabelResponse::$defaultProperties`

Default properties and namespaces for the SOAP API.

Type array | null

protected static property

`Firstred\PostNL\Entity\Response\GenerateLabelResponse::$MergedLabels`

Type `\Firstred\PostNL\Entity\Response\MergedLabel[]` | null

protected static property

`Firstred\PostNL\Entity\Response\GenerateLabelResponse::$ResponseShipments`

Type `\Firstred\PostNL\Entity\Response\ResponseShipment[]` | null

Methods

public `Firstred\PostNL\Entity\Response\GenerateLabelResponse::__construct`(*\$MergedLabels=null*,
\$ReponseShipments=null)

GenerateLabelResponse constructor.

Parameters

- **\$MergedLabels** (`\Firstred\PostNL\Entity\Response\MergedLabel[]` | null)
- **\$ReponseShipments** (`\Firstred\PostNL\Entity\Response\ResponseShipment[]` | null)

ResponseAddress

class `Firstred\PostNL\Entity\Response\ResponseAddress`

Class ResponseAddress.

Parent `\Firstred\PostNL\Entity\AbstractEntity`

Summary

Methods

- `public __construct`(*\$AddressType*, *\$FirstName*, *\$Name*, *\$CompanyName*, *\$Street*, *\$HouseNr*, *\$HouseNrExt*, *\$Zipcode*, *\$City*, *\$Countrycode*, *\$Area*, *\$BuildingName*, *\$Department*, *\$Doorcode*, *\$Floor*, *\$Region*, *\$Remark*)
- `public setZipcode`(*\$Zipcode*)

Properties

public property Firstred\PostNL\Entity\Response\ResponseAddress::\$defaultProperties

Type string[][]

protected static property

Firstred\PostNL\Entity\Response\ResponseAddress::\$AddressType

Type string | null PostNL internal applications validate the receiver ResponseAddress. In case the spelling of ResponseAddresses should be different according to our PostNL information, the ResponseAddress details will be corrected. This can be noticed in Track & Trace.

Please note that the webservice will not add ResponseAddress details. Street and City fields will only be printed when they are in the call towards the labeling webservice.

The element ResponseAddress type is a code in the request. Possible values are:

Code Description 01 Receiver 02 Sender 03 Alternative sender ResponseAddress 04 Collection ResponseAddress (In the orders need to be collected first) 08 Return ResponseAddress* 09 Drop off location (for use with Pick up at PostNL location)

> * When using the 'label in the box return label', it is mandatory to use an > `Antwoord-nummer` in AddressType 08. > This cannot be a regular ResponseAddress

The following rules apply: If there is no ResponseAddress specified with AddressType = 02, the data from Customer/ResponseAddress will be added to the list as AddressType 02. If there is no Customer/ResponseAddress, the message will be rejected.

At least one other AddressType must be specified, other than AddressType 02 In most cases this will be AddressType 01, the receiver ResponseAddress.

protected static property Firstred\PostNL\Entity\Response\ResponseAddress::\$Area

Type string | null

protected static property

Firstred\PostNL\Entity\Response\ResponseAddress::\$Buildingname

Type string | null

protected static property Firstred\PostNL\Entity\Response\ResponseAddress::\$City

Type string | null

protected static property

Firstred\PostNL\Entity\Response\ResponseAddress::\$CompanyName

Type string | null

protected static property

Firstred\PostNL\Entity\Response\ResponseAddress::\$Countrycode

Type string | null

protected static property Firstred\PostNL\Entity\Response\ResponseAddress::\$Department

Type string | null

protected static property Firstred\PostNL\Entity\Response\ResponseAddress::\$Doorcode

Type string | null

protected static property Firstred\PostNL\Entity\Response\ResponseAddress::\$FirstName

Type string | null

protected static property Firstred\PostNL\Entity\Response\ResponseAddress::\$Floor

Type string | null

protected static property Firstred\PostNL\Entity\Response\ResponseAddress::\$HouseNr

Type string | null

protected static property Firstred\PostNL\Entity\Response\ResponseAddress::\$HouseNrExt

Type string | null

protected static property Firstred\PostNL\Entity\Response\ResponseAddress::\$Name

Type string | null

protected static property Firstred\PostNL\Entity\Response\ResponseAddress::\$Region

Type string | null

protected static property Firstred\PostNL\Entity\Response\ResponseAddress::\$Remark

Type string | null

protected static property Firstred\PostNL\Entity\Response\ResponseAddress::\$Street

Type string | null

protected static property Firstred\PostNL\Entity\Response\ResponseAddress::\$Zipcode

Type string | null

protected static property Firstred\PostNL\Entity\Response\ResponseAddress::\$other

Type array | null Array with optional properties

Methods

```
public Firstred\PostNL\Entity\Response\ResponseAddress::__construct($AddressType=null,  
                                                                    $FirstName=null,  
                                                                    $Name=null,  
                                                                    $CompanyName=null,  
                                                                    $Street=null,  
                                                                    $HouseNr=null,  
                                                                    $HouseNrExt=null,  
                                                                    $Zipcode=null,  
                                                                    $City=null,  
                                                                    $Countrycode=null,  
                                                                    $Area=null,  
                                                                    $BuildingName=null,  
                                                                    $Department=null,  
                                                                    $Doorcode=null,  
                                                                    $Floor=null,  
                                                                    $Region=null,  
                                                                    $Remark=null)
```

Parameters

- **\$AddressType** (string | null)
- **\$FirstName** (string | null)
- **\$Name** (string | null)
- **\$CompanyName** (string | null)
- **\$Street** (string | null)
- **\$HouseNr** (string | null)
- **\$HouseNrExt** (string | null)
- **\$Zipcode** (string | null)

- **\$City** (string | null)
- **\$Countrycode** (string | null)
- **\$Area** (string | null)
- **\$BuildingName** (string | null)
- **\$Department** (string | null)
- **\$Doorcode** (string | null)
- **\$Floor** (string | null)
- **\$Region** (string | null)
- **\$Remark** (string | null)

```
public Firstred\PostNL\Entity\Response\ResponseAddress::setZipcode($Zipcode=null)
```

Set postcode.

Parameters

- **\$Zipcode** (string | null)

Returns static

CurrentStatusResponseShipment

```
class Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment
```

Class CurrentStatusResponseShipment.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$Addresses, \$Amounts, \$Barcode, \$DeliveryDate, \$Dimension, \$Expectation, \$Groups, \$ProductCode, \$ProductOptions, \$Reference, \$Status, \$Warnings, \$MainBarcode, \$ShipmentAmount, \$ShipmentCounter, \$ProductDescription)*
- *public setDeliveryDate(\$deliveryDate)*
- *public static jsonDeserialize(\$json)*
- *public xmlSerialize(\$writer)*

Properties

public property

```
Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment::$defaultProperties
```

Type string[][]

protected static property

```
Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment::$Addresses
```

Type *\Firstred\PostNL\Entity>StatusAddress[]* | null

protected static property

Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment::\$Amounts

Type [\Firstred\PostNL\Entity\Amount\[\]](#) | null

protected static property

Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment::\$Barcode

Type [\Firstred\PostNL\Entity\Barcode](#) | null

protected static property

Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment::\$DeliveryDate

Type string | null

protected static property

Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment::\$Dimension

Type [\Firstred\PostNL\Entity\Dimension](#) | null Dimension

protected static property

Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment::\$Expectation

Type [\Firstred\PostNL\Entity\Expectation](#) | null

protected static property

Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment::\$Groups

Type [\Firstred\PostNL\Entity\Group\[\]](#) | null

protected static property

Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment::\$MainBarcode

Type string | null

protected static property

Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment::\$ProductCode

Type string | null

protected static property

Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment::\$ProductDescription

Type string | null

protected static property

Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment::\$ProductOptions

Type [\Firstred\PostNL\Entity\ProductOption\[\]](#) | null

protected static property

Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment::\$Reference

Type string | null

protected static property

Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment::\$ShipmentAmount

Type string | null

protected static property

Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment::\$ShipmentCounter

Type string | null

protected static property

Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment::\$Status

Type [\Firstred\PostNL\Entity>Status](#) | null

protected static property

Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment::\$Warnings

Type `\Firstred\PostNL\Entity\Warning[]` | null

Methods

```
public Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment::__construct($Addresses=null,
                                                                                   $Amounts=null,
                                                                                   $Bar-
                                                                                   code=null,
                                                                                   $De-
                                                                                   liv-
                                                                                   ery-
                                                                                   Date=null,
                                                                                   $Di-
                                                                                   men-
                                                                                   sion=null,
                                                                                   $Ex-
                                                                                   pec-
                                                                                   ta-
                                                                                   tion=null,
                                                                                   $Groups=null,
                                                                                   $Pro-
                                                                                   duct-
                                                                                   Code=null,
                                                                                   $Pro-
                                                                                   duc-
                                                                                   tOp-
                                                                                   tions=null,
                                                                                   $Ref-
                                                                                   er-
                                                                                   ence=null,
                                                                                   $Sta-
                                                                                   tus=null,
                                                                                   $Warn-
                                                                                   ings=null,
                                                                                   $Main-
                                                                                   Bar-
                                                                                   code=null,
                                                                                   $Ship-
                                                                                   men-
                                                                                   tA-
                                                                                   mount=null,
                                                                                   $Ship-
                                                                                   ment-
                                                                                   Counter=null,
                                                                                   $Pro-
                                                                                   duct-
                                                                                   De-
                                                                                   scrip-
                                                                                   tion=null)
```

CurrentStatusResponseShipment constructor.

Parameters

- **\$Addresses** (`Firstred\PostNL\Entity>StatusAddress[]` | null)
- **\$Amounts** (`Firstred\PostNL\Entity\Amount[]` | null)

- **\$Barcode** (string | null)
- **\$DeliveryDate** (DateTimeInterface | string | null)
- **\$Dimension** (*Firstred\PostNL\Entity\Dimension* | null)
- **\$Expectation** (*Firstred\PostNL\Entity\Expectation* | null)
- **\$Groups** (*Firstred\PostNL\Entity\Group[]* | null)
- **\$ProductCode** (string | null)
- **\$ProductOptions** (*Firstred\PostNL\Entity\ProductOption[]* | null)
- **\$Reference** (string | null)
- **\$Status** (*Firstred\PostNL\Entity>Status* | null)
- **\$Warnings** (*Firstred\PostNL\Entity\Warning[]* | null)
- **\$MainBarcode** (string | null)
- **\$ProductDescription** (string | null)

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

```
public Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment::setDeliveryDate($deliveryDate=null)
```

Parameters

- **\$deliveryDate** (string | \DateTimeInterface | null)

Returns static

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Since 1.2.0

```
public static Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment::jsonDeserialize($json)
```

Parameters

- **\$json** (stdClass)

Returns mixed | \stdClass | null

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Since 1.2.0

```
public Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment::xmlSerialize($writer)
```

Return a serializable array for the XMLWriter.

Parameters

- **\$writer** (Sabre\Xml\Writer)

Returns void

ConfirmingResponseShipment

```
class Firstred\PostNL\Entity\Response\ConfirmingResponseShipment
```

Class ConfirmingResponseShipment.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$Barcode, \$Warnings)*

Properties

public property

Firstred\PostNL\Entity\Response\ConfirmingResponseShipment::\$defaultProperties

Type string[][]

protected static property

Firstred\PostNL\Entity\Response\ConfirmingResponseShipment::\$Barcode

Type string | null

protected static property

Firstred\PostNL\Entity\Response\ConfirmingResponseShipment::\$Warnings

Type *\Firstred\PostNL\Entity\Warning[]* | null

Methods

```
public Firstred\PostNL\Entity\Response\ConfirmingResponseShipment::__construct($Barcode=null,
                                                                                   $Warnings=null)
```

Parameters

- **\$Barcode** (string | null)
- **\$Warnings** (*Firstred\PostNL\Entity\Warning[]* | null)

GetDeliveryDateResponse

```
class Firstred\PostNL\Entity\Response\GetDeliveryDateResponse
```

Class GetDeliveryDateResponse.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- `public __construct($DeliveryDate, $Options)`
- `public setDeliveryDate($DeliveryDate)`
- `public xmlSerialize($writer)`
- `public static jsonDeserialize($json)`

Properties

public property

Firstred\PostNL\Entity\Response\GetDeliveryDateResponse::\$defaultProperties

Default properties and namespaces for the SOAP API.

Type array

protected static property

Firstred\PostNL\Entity\Response\GetDeliveryDateResponse::\$DeliveryDate

Type string | null

protected static property

Firstred\PostNL\Entity\Response\GetDeliveryDateResponse::\$Options

Type string[] | null

Methods

public Firstred\PostNL\Entity\Response\GetDeliveryDateResponse::__construct(*\$DeliveryDate=null, \$Options=null*)

GetDeliveryDateResponse constructor.

Parameters

- **\$DeliveryDate** (string | \DateTimeInterface | null)
- **\$Options** (string[] | null)

Throws [\Firstred\PostNL\Exception\InvalidArgumentException](#)

public Firstred\PostNL\Entity\Response\GetDeliveryDateResponse::setDeliveryDate(*\$DeliveryDate=null*)

Parameters

- **\$DeliveryDate** (DateTimeInterface | string | null)

Returns static

Throws [\Firstred\PostNL\Exception\InvalidArgumentException](#)

Since 1.2.0

public Firstred\PostNL\Entity\Response\GetDeliveryDateResponse::xmlSerialize(*\$writer*)

Return a serializable array for the XMLWriter.

Parameters

- **\$writer** (Sabre\Xml\Writer)

Returns void

```
public static Firstred\PostNL\Entity\Response\GetDeliveryDateResponse::jsonDeserialize($json)
```

Parameters

- **\$json** (stdClass)

Returns `\Firstred\PostNL\Entity\Response\GetDeliveryDateResponse` | object | `\stdClass` | null

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

SendShipmentResponse

```
class Firstred\PostNL\Entity\Response\SendShipmentResponse
```

Class SendShipmentResponse.

Parent `Firstred\PostNL\Entity\AbstractEntity`

Summary

Methods

- `public __construct($MergedLabels, $ReponseShipments)`

Properties

public property

`Firstred\PostNL\Entity\Response\SendShipmentResponse::$defaultProperties`

Type array | null

protected static property

`Firstred\PostNL\Entity\Response\SendShipmentResponse::$MergedLabels`

Type `\Firstred\PostNL\Entity\Response\MergedLabel[]` | null

protected static property

`Firstred\PostNL\Entity\Response\SendShipmentResponse::$ResponseShipments`

Type `\Firstred\PostNL\Entity\Response\ResponseShipment[]` | null

Methods

```
public Firstred\PostNL\Entity\Response\SendShipmentResponse::__construct($MergedLabels=null,  
                                                                    $ReponseShip-  
                                                                    ments=null)
```

SendShipmentResponse constructor.

Parameters

- **\$MergedLabels** (*Firstred\PostNL\Entity\Response\MergedLabel[]* | null)
- **\$ReponseShipments** (*Firstred\PostNL\Entity\Response\ResponseShipment[]* | null)

CompleteStatusResponseOldStatus

```
class Firstred\PostNL\Entity\Response\CompleteStatusResponseOldStatus
```

Class CompleteStatusResponseOldStatus.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$StatusCode, \$StatusDescription, \$PhaseCode, \$PhaseDescription, \$TimeStamp)*
- *public setTimeStamp(\$TimeStamp)*

Properties

public property

```
Firstred\PostNL\Entity\Response\CompleteStatusResponseOldStatus::$defaultProperties
```

Default properties and namespaces for the SOAP API.

Type array

protected static property

```
Firstred\PostNL\Entity\Response\CompleteStatusResponseOldStatus::$StatusCode
```

Type string | null

protected static property

```
Firstred\PostNL\Entity\Response\CompleteStatusResponseOldStatus::$StatusDescription
```

Type string | null

protected static property

```
Firstred\PostNL\Entity\Response\CompleteStatusResponseOldStatus::$PhaseCode
```

Type string | null

protected static property

```
Firstred\PostNL\Entity\Response\CompleteStatusResponseOldStatus::$PhaseDescription
```

Type string | null

protected static property

Firstred\PostNL\Entity\Response\CompleteStatusResponseOldStatus::\$TimeStamp

Type \DateTimeInterface | null

Methods

```
public Firstred\PostNL\Entity\Response\CompleteStatusResponseOldStatus::__construct($StatusCode=null,
                                                                                      $Sta-
                                                                                      tus-
                                                                                      De-
                                                                                      scrip-
                                                                                      tion=null,
                                                                                      $PhaseC-
                                                                                      ode=null,
                                                                                      $PhaseDescrip-
                                                                                      tion=null,
                                                                                      $TimeS-
                                                                                      tamp=null)
```

CompleteStatusResponseOldStatus constructor.

Parameters

- **\$StatusCode** (string | null)
- **\$StatusDescription** (string | null)
- **\$PhaseCode** (string | null)
- **\$PhaseDescription** (string | null)
- **\$TimeStamp** (\DateTimeInterface | string | null)

Throws [\Firstred\PostNL\Exception\InvalidArgumentException](#)

```
public Firstred\PostNL\Entity\Response\CompleteStatusResponseOldStatus::setTimeStamp($TimeStamp=null)
```

Parameters

- **\$TimeStamp** (string | \DateTimeInterface | null)

Returns static

Throws [\Firstred\PostNL\Exception\InvalidArgumentException](#)

Since 1.2.0

SOAP

\Firstred\PostNL\Entity\SOAP

Classes

Header

class Firstred\PostNL\Entity\SOAP\Header

Class Header.

NOTE: this class has been introduced for deserializing

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Body

class Firstred\PostNL\Entity\SOAP\Body

Class Body.

NOTE: this class has been introduced for deserializing

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Properties

public property Firstred\PostNL\Entity\SOAP\Body::\$defaultProperties

Type array

protected static property Firstred\PostNL\Entity\SOAP\Body::\$GenerateBarcodeResponse

Type *\Firstred\PostNL\Entity\Response\GenerateBarcodeResponse* | null

UsernameToken

class Firstred\PostNL\Entity\SOAP\UsernameToken

Class UsernameToken.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- `public __construct($Username, $Password)`
- `public xmlSerialize($writer)`

Properties

```
public property Firstred\PostNL\Entity\SOAP\UsernameToken::$defaultProperties
    Type string[][]
protected static property Firstred\PostNL\Entity\SOAP\UsernameToken::$Username
    Type string | null
protected static property Firstred\PostNL\Entity\SOAP\UsernameToken::$Password
    Type string | null
```

Methods

```
public Firstred\PostNL\Entity\SOAP\UsernameToken::__construct($Username=null,
                                                             $Password=null)
```

UsernameToken constructor.

Parameters

- **\$Username** (string | null)
- **\$Password** (string | null) Plaintext password

```
public Firstred\PostNL\Entity\SOAP\UsernameToken::xmlSerialize($writer)
```

Return a serializable array for the XMLWriter.

Parameters

- **\$writer** (Sabre\Xml\Writer)

Returns void

Security

```
class Firstred\PostNL\Entity\SOAP\Security
```

Class Security.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- `public __construct($UserNameToken)`

Constants

`SECURITY_NAMESPACE = \'http://docs\.oasis\-.open\.org/wss/2004/01/oasis\-.200401\-.wss\-.wssecurity\-.secent\-.1\.0\.xsd\'`

Properties

`public property Firstred\PostNL\Entity\SOAP\Security::$defaultProperties`

`Type string[][]`

`protected static property Firstred\PostNL\Entity\SOAP\Security::$UsernameToken`

`Type \Firstred\PostNL\Entity\SOAP\UsernameToken`

Methods

`public Firstred\PostNL\Entity\SOAP\Security::__construct($UserNameToken=null)`

Security constructor.

Parameters

- `$UsernameToken` (`Firstred\PostNL\Entity\SOAP\UsernameToken`)

Envelope

`class Firstred\PostNL\Entity\SOAP\Envelope`

Class Envelope.

Parent `Firstred\PostNL\Entity\AbstractEntity`

Summary

Methods

- `public __construct($Header, $Body)`

Properties

public property Firstred\PostNL\Entity\SOAP\Envelope::\$defaultProperties

Default properties and namespaces for the SOAP API.

Type array

protected static property Firstred\PostNL\Entity\SOAP\Envelope::\$Header

Type \Firstred\PostNL\Entity\SOAP\Header | null

protected static property Firstred\PostNL\Entity\SOAP\Envelope::\$Body

Type \Firstred\PostNL\Entity\SOAP\Body | null

Methods

public Firstred\PostNL\Entity\SOAP\Envelope::__construct(*\$Header=null*, *\$Body=null*)

Envelope constructor.

Parameters

- **\$Header** (*Firstred\PostNL\Entity\SOAP\Header* | null)
- **\$Body** (*Firstred\PostNL\Entity\SOAP\Body* | null)

Classes

CoordinatesSouthEast

class Firstred\PostNL\Entity\CoordinatesSouthEast

Class CoordinatesSouthEast.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public* __construct(*\$Latitude*, *\$Longitude*)

Properties

```
public property Firstred\PostNL\Entity\CoordinatesSouthEast::$defaultProperties
    Type string[][]
protected static property Firstred\PostNL\Entity\CoordinatesSouthEast::$Latitude
    Type string | null
protected static property Firstred\PostNL\Entity\CoordinatesSouthEast::$Longitude
    Type string | null
```

Methods

```
public Firstred\PostNL\Entity\CoordinatesSouthEast::__construct($Latitude=null,
                                                                $Longitude=null)
```

Parameters

- **\$Latitude** (string | null)
- **\$Longitude** (string | null)

OldStatus

```
class Firstred\PostNL\Entity\OldStatus
```

Class OldStatus.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$PhaseCode, \$PhaseDescription, \$OldStatusCode, \$OldStatusDescription, \$TimeStamp)*

Properties

```
public property Firstred\PostNL\Entity\OldStatus::$defaultProperties
    Type string[][]
protected static property Firstred\PostNL\Entity\OldStatus::$CurrentPhaseCode
    Type string | null
protected static property Firstred\PostNL\Entity\OldStatus::$CurrentPhaseDescription
    Type string | null
protected static property Firstred\PostNL\Entity\OldStatus::$CurrentOldStatusCode
    Type string | null
protected static property
Firstred\PostNL\Entity\OldStatus::$CurrentOldStatusDescription
```

Type string | null

protected static property Firstred\PostNL\Entity\OldStatus::\$CurrentOldStatusTimeStamp

Type string | null

Methods

```
public Firstred\PostNL\Entity\OldStatus::__construct($PhaseCode=null,
                                                    $PhaseDescription=null,
                                                    $OldStatusCode=null,
                                                    $OldStatusDescription=null,
                                                    $TimeStamp=null)
```

Parameters

- **\$PhaseCode** (string | null)
- **\$PhaseDescription** (string | null)
- **\$OldStatusCode** (string | null)
- **\$OldStatusDescription** (string | null)
- **\$TimeStamp** (string | null)

StatusAddress

class Firstred\PostNL\Entity\StatusAddress

Class StatusAddress.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$AddressType, \$FirstName, \$LastName, \$CompanyName, \$DepartmentName, \$Street, \$HouseNumber, \$HouseNumberSuffix, \$Zipcode, \$City, \$CountryCode, \$Region, \$District, \$Building, \$Floor, \$Remark, \$RegistrationDate)*
- *public setZipcode(\$Zipcode)*
- *public setAddressType(\$AddressType)*
- *public setRegistrationDate(\$RegistrationDate)*

Properties

public property Firstred\PostNL\Entity\StatusAddress::\$defaultProperties

Type string[][]

protected static property Firstred\PostNL\Entity\StatusAddress::\$AddressType

Type string | null PostNL internal applications validate the receiver address. In case the spelling of addresses should be different according to our PostNL information, the address details will be corrected. This can be noticed in Track & Trace.

Please note that the webservice will not add address details. Street and City fields will only be printed when they are in the call towards the labeling webservice.

The element Address type is a code in the request. Possible values are:

Code Description 01 Receiver 02 Sender 03 Alternative sender address 04 Collection address (In the orders need to be collected first) 08 Return address* 09 Drop off location (for use with Pick up at PostNL location)

> * When using the 'label in the box return label', it is mandatory to use an > `Antwoord-nummer` in AddressType 08. > This cannot be a regular address

The following rules apply: If there is no Address specified with AddressType = 02, the data from Customer/Address will be added to the list as AddressType 02. If there is no Customer/Address, the message will be rejected.

At least one other AddressType must be specified, other than AddressType 02 In most cases this will be AddressType 01, the receiver address.

protected static property Firstred\PostNL\Entity\StatusAddress::\$Building

Type string | null

protected static property Firstred\PostNL\Entity\StatusAddress::\$City

Type string | null

protected static property Firstred\PostNL\Entity\StatusAddress::\$CompanyName

Type string | null

protected static property Firstred\PostNL\Entity\StatusAddress::\$CountryCode

Type string | null

protected static property Firstred\PostNL\Entity\StatusAddress::\$DepartmentName

Type string | null

protected static property Firstred\PostNL\Entity\StatusAddress::\$District

Type string | null

protected static property Firstred\PostNL\Entity\StatusAddress::\$FirstName

Type string | null

protected static property Firstred\PostNL\Entity\StatusAddress::\$Floor

Type string | null

protected static property Firstred\PostNL\Entity\StatusAddress::\$HouseNumber

Type string | null

protected static property Firstred\PostNL\Entity\StatusAddress::\$HouseNumberSuffix

Type string | null

protected static property Firstred\PostNL\Entity\StatusAddress::\$LastName

Type string | null

protected static property Firstred\PostNL\Entity\StatusAddress::\$Region

Type string | null

protected static property Firstred\PostNL\Entity\StatusAddress::\$RegistrationDate

Type string | null

protected static property Firstred\PostNL\Entity\StatusAddress::\$Remark

Type string | null

protected static property Firstred\PostNL\Entity\StatusAddress::\$Street

Type string | null

protected static property Firstred\PostNL\Entity\StatusAddress::\$Zipcode

Type string | null

protected static property Firstred\PostNL\Entity\StatusAddress::\$other

Type array | null Array with optional properties

Methods

```
public Firstred\PostNL\Entity\StatusAddress::__construct($AddressType=null,  
                                                         $FirstName=null, $LastName=null,  
                                                         $CompanyName=null,  
                                                         $DepartmentName=null,  
                                                         $Street=null, $HouseNumber=null,  
                                                         $HouseNumberSuffix=null,  
                                                         $Zipcode=null, $City=null,  
                                                         $CountryCode=null, $Region=null,  
                                                         $District=null, $Building=null,  
                                                         $Floor=null, $Remark=null,  
                                                         $RegistrationDate=null)
```

Parameters

- **\$AddressType** (string | null)
- **\$FirstName** (string | null)
- **\$LastName** (string | null)
- **\$CompanyName** (string | null)
- **\$DepartmentName** (string | null)
- **\$Street** (string | null)
- **\$HouseNumber** (string | null)
- **\$HouseNumberSuffix** (string | null)
- **\$Zipcode** (string | null)
- **\$City** (string | null)
- **\$CountryCode** (string | null)
- **\$Region** (string | null)
- **\$District** (string | null)
- **\$Building** (string | null)

- **\$Floor** (string | null)
- **\$Remark** (string | null)
- **\$RegistrationDate** (DateTimeInterface | string | null)

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

public Firstred\PostNL\Entity>StatusAddress::setZipcode(\$Zipcode=null)

Set postcode.

Parameters

- **\$Zipcode** (string | null)

Returns static

public Firstred\PostNL\Entity>StatusAddress::setAddressType(\$AddressType=null)

Set the AddressType.

Parameters

- **\$AddressType** (int | string | null)

Returns static

public Firstred\PostNL\Entity>StatusAddress::setRegistrationDate(\$RegistrationDate=null)

Parameters

- **\$RegistrationDate** (DateTimeInterface | string | null)

Returns static

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Since 1.2.0

Warning

class Firstred\PostNL\Entity\Warning

Class Warning.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$Code, \$Description)*
- *public static jsonDeserialize(\$json)*

Properties

public property Firstred\PostNL\Entity\Warning::\$defaultProperties

Type string[][]

protected static property Firstred\PostNL\Entity\Warning::\$Code

Type string | null

protected static property Firstred\PostNL\Entity\Warning::\$Description

Type string | null

Methods

public Firstred\PostNL\Entity\Warning::__construct(*\$Code=null, \$Description=null*)

Parameters

- *\$Code* (string | null)
- *\$Description* (string | null)

public static Firstred\PostNL\Entity\Warning::jsonDeserialize(*\$json*)

Deserialize JSON.

Parameters

- *\$json* (stdClass) JSON object {*"EntityName": object*}

Returns static

Throws \Firstred\PostNL\Exception\NotSupportedException

Throws \Firstred\PostNL\Exception\InvalidArgumentException

Throws \Firstred\PostNL\Exception\NotSupportedException

Throws \Firstred\PostNL\Exception\InvalidArgumentException

ReasonNoTimeframe

class Firstred\PostNL\Entity\ReasonNoTimeframe

Class ReasonNoTimeframe.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- `public __construct($Code, $Date, $Description, $Options, $From, $To, $Sustainability)`
- `public setDate($date)`
- `public static jsonDeserialize($json)`
- `public xmlSerialize($writer)`

Properties

```
public property Firstred\PostNL\Entity\ReasonNoTimeframe::$defaultProperties
    Type string[][]
protected static property Firstred\PostNL\Entity\ReasonNoTimeframe::$Code
    Type string | null
protected static property Firstred\PostNL\Entity\ReasonNoTimeframe::$Date
    Type \DateTimeInterface | null
protected static property Firstred\PostNL\Entity\ReasonNoTimeframe::$Description
    Type string | null
protected static property Firstred\PostNL\Entity\ReasonNoTimeframe::$Options
    Type string[] | null
protected static property Firstred\PostNL\Entity\ReasonNoTimeframe::$From
    Type string | null
protected static property Firstred\PostNL\Entity\ReasonNoTimeframe::$To
    Type string | null
protected static property Firstred\PostNL\Entity\ReasonNoTimeframe::$Sustainability
    Type \Firstred\PostNL\Entity\Sustainability | null
```

Methods

```
public Firstred\PostNL\Entity\ReasonNoTimeframe::__construct($Code=null, $Date=null,
                                                             $Description=null,
                                                             $Options=null, $From=null,
                                                             $To=null, $Sustainability=null)
```

ReasonNoTimeframe constructor.

Parameters

- **\$Code** (string | null)
- **\$Date** (string | \DateTimeInterface | null)
- **\$Description** (string | null)
- **\$Options** (string[] | null)

- **\$From** (string | null)
- **\$To** (string | null)
- **\$Sustainability** (*Firstred\PostNL\Entity\Sustainability* | null)

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

public Firstred\PostNL\Entity\ReasonNoTimeframe::**setDate**(\$date=null)

Set date

Parameters

- **\$date** (string | \DateTimeInterface | null)

Returns static

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Since 1.2.0

public static Firstred\PostNL\Entity\ReasonNoTimeframe::**jsonDeserialize**(\$json)

Parameters

- **\$json** (stdClass)

Returns mixed | \stdClass | null

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Since 1.2.0

public Firstred\PostNL\Entity\ReasonNoTimeframe::**xmlSerialize**(\$writer)

Return a serializable array for the XMLWriter.

Parameters

- **\$writer** (Sabre\Xml\Writer)

Returns void

Area

class Firstred\PostNL\Entity\Area

Class Area.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- `public __construct($CoordinatesNorthWest, $CoordinatesSouthEast)`

Properties

public property Firstred\PostNL\Entity\Area::\$defaultProperties

Type string[][]

protected static property Firstred\PostNL\Entity\Area::\$CoordinatesNorthWest

Type \Firstred\PostNL\Entity\Coordinates | null

protected static property Firstred\PostNL\Entity\Area::\$CoordinatesSouthEast

Type \Firstred\PostNL\Entity\Coordinates | null

Methods

public Firstred\PostNL\Entity\Area::__construct(*\$CoordinatesNorthWest=null,*
\$CoordinatesSouthEast=null)

Parameters

- **\$CoordinatesNorthWest** (*Firstred\PostNL\Entity\Coordinates* | null)
- **\$CoordinatesSouthEast** (*Firstred\PostNL\Entity\Coordinates* | null)

Contact

class Firstred\PostNL\Entity\Contact

Class Contact.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- `public __construct($ContactType, $Email, $SMSNr, $TelNr)`
- `public setTelNr($TelNr, $countryCode)`
- `public setSMSNr($SMSNr, $countryCode)`

Properties

```
public property Firstred\PostNL\Entity\Contact::$defaultProperties
    Type string[][]

protected static property Firstred\PostNL\Entity\Contact::$ContactType
    Type string | null

protected static property Firstred\PostNL\Entity\Contact::$Email
    Type string | null

protected static property Firstred\PostNL\Entity\Contact::$SMSNr
    Type string | null

protected static property Firstred\PostNL\Entity\Contact::$TelNr
    Type string | null
```

Methods

```
public Firstred\PostNL\Entity\Contact::__construct($ContactType=null, $Email=null,
                                                    $SMSNr=null, $TelNr=null)
```

Contact constructor.

Parameters

- **\$ContactType** (string | null)
- **\$Email** (string | null)
- **\$SMSNr** (string | null)
- **\$TelNr** (string | null)

Throws \libphonenumber\NumberParseException

```
public Firstred\PostNL\Entity\Contact::setTelNr($TelNr=null, $countryCode=null)
```

Set the telephone number.

Parameters

- **\$TelNr** (string | null)
- **\$countryCode** (string | null)

Returns static

Throws \libphonenumber\NumberParseException

Since 1.0.0

Since 1.0.0

```
public Firstred\PostNL\Entity\Contact::setSMSNr($SMSNr=null, $countryCode=null)
```

Set the mobile number.

Parameters

- **\$SMSNr** (string | null)

- **\$countryCode** (string | null)

Returns static

Throws `\libphonenumber\NumberParseException`

Since 1.0.0

Since 1.0.0

Event

class `Firstred\PostNL\Entity\Event`

Class Event.

Parent `Firstred\PostNL\Entity\AbstractEntity`

Summary

Methods

- `public __construct($CompleteStatusResponseEvent)`

Properties

public property `Firstred\PostNL\Entity\Event::$defaultProperties`

Type `string[][]`

protected static property `Firstred\PostNL\Entity\Event::$CompleteStatusResponseEvent`

Type `\Firstred\PostNL\Entity\Response\CompleteStatusResponseEvent` | null

Methods

public `Firstred\PostNL\Entity\Event::__construct($CompleteStatusResponseEvent=null)`

Parameters

- **\$CompleteStatusResponseEvent** (`Firstred\PostNL\Entity\Response\CompleteStatusResponseEvent` | null)

AbstractEntity

class `Firstred\PostNL\Entity\AbstractEntity`

Class Entity.

Implements `JsonSerializable` `Firstred\PostNL\Util\XmlSerializable`

Summary

Methods

- `public __construct()`
- `public static create($properties)`
- `public __call($name, $value)`
- `public jsonSerialize()`
- `public xmlSerialize($writer)`
- `public static jsonDeserialize($json)`
- `public static xmlDeserialize($xml)`
- `public static shouldBeAnArray($fqcn, $propertyName)`
- `public static getFullyQualifiedEntityClassName($shortName)`

Properties

public property Firstred\PostNL\Entity\AbstractEntity::\$defaultProperties

Type array

protected static property Firstred\PostNL\Entity\AbstractEntity::\$id

Type string

protected static property Firstred\PostNL\Entity\AbstractEntity::\$currentService

Type string

Methods

public Firstred\PostNL\Entity\AbstractEntity::__construct()

AbstractEntity constructor.

public static Firstred\PostNL\Entity\AbstractEntity::create(*\$properties*=\|/)

Create an instance of this class without touching the constructor.

Parameters

- **\$properties** (array)

Returns static

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Since 1.0.0

Deprecated 1.4.0 Use the constructor instead with named arguments

public Firstred\PostNL\Entity\AbstractEntity::__call(*\$name*, *\$value*)

Parameters

- **\$name** (string)

- **\$value** (mixed)

Returns object | null

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

```
public Firstred\PostNL\Entity\AbstractEntity::jsonSerialize()
```

Return a serializable array for `json\_encode`.

Returns array

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

```
public Firstred\PostNL\Entity\AbstractEntity::xmlSerialize($writer)
```

Return a serializable array for the XMLWriter.

Parameters

- **\$writer** (Sabre\Xml\Writer)

Returns void

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

```
public static Firstred\PostNL\Entity\AbstractEntity::jsonDeserialize($json)
```

Deserialize JSON.

Parameters

- **\$json** (stdClass) JSON object {`"EntityName": object`}

Returns static

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

```
public static Firstred\PostNL\Entity\AbstractEntity::xmlDeserialize($xml)
```

Deserialize XML.

Parameters

- **\$xml** (array) Associative array representation of XML response, using Clark notation for namespaces

Returns `\Firstred\PostNL\Entity\AbstractEntity`

```
public static Firstred\PostNL\Entity\AbstractEntity::shouldBeAnArray($fqcn,  
                                                                    $propertyName)
```

Whether the given property should bbe an array

Parameters

- **\$fqcn** (string)

- **\$propertyName** (string)

Returns false | string If found, singular name of property

Since 1.2.0

Deprecated 1.4.1

```
public static Firstred\PostNL\Entity\AbstractEntity::getFullyQualifiedEntityClassName($shortName)
```

Get the fully qualified class name for the given entity name.

Parameters

- **\$shortName** (string)

Returns string The FQCN

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Since 1.2.0

Deprecated 1.4.1

Label

```
class Firstred\PostNL\Entity\Label
```

Class Label.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$Content, \$ContentType, \$Labeltype)*
- *public getContenttype()*
- *public setContenttype(\$Contenttype)*

Constants

FORMAT_A4 = 1

FORMAT_A6 = 2

Properties

```
public property Firstred\PostNL\Entity\Label::$defaultProperties
    Type string[][]
protected static property Firstred\PostNL\Entity\Label::$Content
    Type string | null Base 64 encoded content
protected static property Firstred\PostNL\Entity\Label::$OutputType
    Type string | null
protected static property Firstred\PostNL\Entity\Label::$Labeltype
    Type string | null
```

Methods

```
public Firstred\PostNL\Entity\Label::__construct($Content=null, $ContentType=null,
                                                $Labeltype=null)
```

Parameters

- **\$Content** (string | null)
- **\$ContentType** (string | null)
- **\$Labeltype** (string | null)

```
public Firstred\PostNL\Entity\Label::getContenttype()
```

Returns string | null

Deprecated 1.4.2 Use `getOutputType` instead

```
public Firstred\PostNL\Entity\Label::setContenttype($Contenttype)
```

Parameters

- **\$Contenttype** (string | null)

Returns static

Deprecated 1.4.2 Use `getOutputType` instead

Expectation

```
class Firstred\PostNL\Entity\Expectation
```

Class Expectation.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- `public __construct($ETAFrom, $ETATo)`
- `public setETAFrom($ETAFrom)`
- `public setETATo($ETATo)`

Properties

public property Firstred\PostNL\Entity\Expectation::\$defaultProperties

Type string[][]

protected static property Firstred\PostNL\Entity\Expectation::\$ETAFrom

Type \DateTimeInterface | null

protected static property Firstred\PostNL\Entity\Expectation::\$ETATo

Type \DateTimeInterface | null

Methods

public Firstred\PostNL\Entity\Expectation::__construct(*\$ETAFrom=null*, *\$ETATo=null*)

Parameters

- **\$ETAFrom** (DateTimeInterface | string | null)
- **\$ETATo** (DateTimeInterface | string | null)

Throws [\Firstred\PostNL\Exception\InvalidArgumentException](#)

public Firstred\PostNL\Entity\Expectation::setETAFrom(*\$ETAFrom=null*)

Parameters

- **\$ETAFrom** (DateTimeInterface | string | null)

Returns static

Throws [\Firstred\PostNL\Exception\InvalidArgumentException](#)

Since 1.2.0

public Firstred\PostNL\Entity\Expectation::setETATo(*\$ETATo=null*)

Parameters

- **\$ETATo** (DateTimeInterface | string | null)

Returns static

Throws [\Firstred\PostNL\Exception\InvalidArgumentException](#)

Since 1.2.0

Timeframes

class Firstred\PostNL\Entity\Timeframes

Class Timeframes.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$timeframes, \$timeframetimeframes)*
- *public jsonSerialize()*

Properties

public property Firstred\PostNL\Entity\Timeframes::\$defaultProperties

Type string[][]

protected static property Firstred\PostNL\Entity\Timeframes::\$Timeframes

Type \Firstred\PostNL\Entity\Timeframe[] | null

protected static property Firstred\PostNL\Entity\Timeframes::\$TimeframeTimeFrames

Type \Firstred\PostNL\Entity\TimeframeTimeFrame[] | null

Methods

public Firstred\PostNL\Entity\Timeframes::__construct(*\$timeframes=null,*
\$timeframetimeframes=null)

Timeframes constructor.

Parameters

- **\$timeframes** (array | null)
- **\$timeframetimeframes** (*Firstred\PostNL\Entity\TimeframeTimeFrame[]* | null)

public Firstred\PostNL\Entity\Timeframes::jsonSerialize()

Return a serializable array for `json\_encode`.

Returns array

Group

class Firstred\PostNL\Entity\Group

Class Group.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$GroupCount, \$GroupSequence, \$GroupType, \$MainBarcode)*

Properties

public property Firstred\PostNL\Entity\Group::\$defaultProperties

Type string[][]

protected static property Firstred\PostNL\Entity\Group::\$GroupCount

Amount of shipments in the group.

Type string | null

protected static property Firstred\PostNL\Entity\Group::\$GroupSequence

Sequence number.

Type string | null

protected static property Firstred\PostNL\Entity\Group::\$GroupType

The type of group.

Possible values:

- `01`: Collection request
- `03`: Multiple parcels in one shipment (multi-colli)
- `04`: Single parcel in one shipment

Type string | null

protected static property Firstred\PostNL\Entity\Group::\$MainBarcode

Main barcode for the shipment.

Type string | null

Methods

```
public Firstred\PostNL\Entity\Group::__construct($GroupCount=null, $GroupSequence=null,
                                                $GroupType=null, $MainBarcode=null)
```

Group Constructor.

Parameters

- **\$GroupCount** (string | null)
- **\$GroupSequence** (string | null)
- **\$GroupType** (string | null)
- **\$MainBarcode** (string | null)

Address

```
class Firstred\PostNL\Entity\Address
```

Class Address.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$AddressType, \$FirstName, \$Name, \$CompanyName, \$Street, \$HouseNr, \$HouseNrExt, \$Zipcode, \$City, \$Countrycode, \$Area, \$BuildingName, \$Department, \$Doorcode, \$Floor, \$Region, \$Remark, \$StreetHouseNrExt)*
- *public setZipcode(\$Zipcode)*
- *public setAddressType(\$AddressType)*

Properties

```
public property Firstred\PostNL\Entity\Address::$defaultProperties
```

Type string[][]

```
protected static property Firstred\PostNL\Entity\Address::$AddressType
```

Type string | null PostNL internal applications validate the receiver address. In case the spelling of addresses should be different according to our PostNL information, the address details will be corrected. This can be noticed in Track & Trace.

Please note that the webservice will not add address details. Street and City fields will only be printed when they are in the call towards the labeling webservice.

The element Address type is a code in the request. Possible values are:

Code Description 01 Receiver 02 Sender 03 Alternative sender address 04 Collection address (In the orders need to be collected first) 08 Return address* 09 Drop off location (for use with Pick up at PostNL location)

> * When using the 'label in the box return label', it is mandatory to use an > `Antwoord-nummer` in AddressType 08. > This cannot be a regular address

The following rules apply: If there is no Address specified with AddressType = 02, the data from Customer/Address will be added to the list as AddressType 02. If there is no Customer/Address, the message will be rejected.

At least one other AddressType must be specified, other than AddressType 02. In most cases this will be AddressType 01, the receiver address.

protected static property Firstred\PostNL\Entity\Address::\$Area

Type string | null

protected static property Firstred\PostNL\Entity\Address::\$Buildingname

Type string | null

protected static property Firstred\PostNL\Entity\Address::\$City

Type string | null

protected static property Firstred\PostNL\Entity\Address::\$CompanyName

Type string | null

protected static property Firstred\PostNL\Entity\Address::\$Countrycode

Type string | null

protected static property Firstred\PostNL\Entity\Address::\$Department

Type string | null

protected static property Firstred\PostNL\Entity\Address::\$Doorcode

Type string | null

protected static property Firstred\PostNL\Entity\Address::\$FirstName

Type string | null

protected static property Firstred\PostNL\Entity\Address::\$Floor

Type string | null

protected static property Firstred\PostNL\Entity\Address::\$HouseNr

Type string | null

protected static property Firstred\PostNL\Entity\Address::\$HouseNrExt

Type string | null

protected static property Firstred\PostNL\Entity\Address::\$StreetHouseNrExt

Type string | null

protected static property Firstred\PostNL\Entity\Address::\$Name

Type string | null

protected static property Firstred\PostNL\Entity\Address::\$Region

Type string | null

protected static property Firstred\PostNL\Entity\Address::\$Remark

Type string | null

protected static property Firstred\PostNL\Entity\Address::\$Street

Type string | null

protected static property Firstred\PostNL\Entity\Address::\$Zipcode

Type string | null

protected static property Firstred\PostNL\Entity\Address::\$other

Type array | null Array with optional properties

Methods

```
public Firstred\PostNL\Entity\Address::__construct($AddressType=null, $FirstName=null,  
                                                    $Name=null, $CompanyName=null,  
                                                    $Street=null, $HouseNr=null,  
                                                    $HouseNrExt=null, $Zipcode=null,  
                                                    $City=null, $Countrycode=null, $Area=null,  
                                                    $BuildingName=null, $Department=null,  
                                                    $Doorcode=null, $Floor=null, $Region=null,  
                                                    $Remark=null, $StreetHouseNrExt=null)
```

Parameters

- **\$AddressType** (string | null)
- **\$FirstName** (string | null)
- **\$Name** (string | null)
- **\$CompanyName** (string | null)
- **\$Street** (string | null)
- **\$HouseNr** (string | null)
- **\$HouseNrExt** (string | null)
- **\$Zipcode** (string | null)
- **\$City** (string | null)
- **\$Countrycode** (string | null)
- **\$Area** (string | null)
- **\$BuildingName** (string | null)
- **\$Department** (string | null)
- **\$Doorcode** (string | null)
- **\$Floor** (string | null)
- **\$Region** (string | null)
- **\$Remark** (string | null)
- **\$StreetHouseNrExt** (string | null)

```
public Firstred\PostNL\Entity\Address::setZipcode($Zipcode=null)
```

Set postcode.

Parameters

- **\$Zipcode** (string | null)

Returns static

```
public Firstred\PostNL\Entity\Address::setAddressType($AddressType=null)
```

Set the AddressType.

Parameters

- **\$AddressType** (int | string | null)

Returns static

Customer

class Firstred\PostNL\Entity\Customer

Class Customer.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$CustomerNumber, \$CustomerCode, \$CollectionLocation, \$ContactPerson, \$Email, \$Name, \$Address, \$GlobalPackCustomerCode, \$GlobalPackBarcodeType)*

Properties

public property Firstred\PostNL\Entity\Customer::\$defaultProperties

Type string[][]

protected static property Firstred\PostNL\Entity\Customer::\$Address

Type *\Firstred\PostNL\Entity\Address* | null

protected static property Firstred\PostNL\Entity\Customer::\$CollectionLocation

Type string | null

protected static property Firstred\PostNL\Entity\Customer::\$ContactPerson

Type string | null

protected static property Firstred\PostNL\Entity\Customer::\$CustomerCode

Type string | null

protected static property Firstred\PostNL\Entity\Customer::\$CustomerNumber

Type string | null

protected static property Firstred\PostNL\Entity\Customer::\$GlobalPackCustomerCode

Type string | null

protected static property Firstred\PostNL\Entity\Customer::\$GlobalPackBarcodeType

Type string | null

protected static property Firstred\PostNL\Entity\Customer::\$Email

Type string | null

protected static property Firstred\PostNL\Entity\Customer::\$Name

Type string | null

Methods

```
public Firstred\PostNL\Entity\Customer::__construct($CustomerNumber=null,
                                                    $CustomerCode=null,
                                                    $CollectionLocation=null,
                                                    $ContactPerson=null, $Email=null,
                                                    $Name=null, $Address=null,
                                                    $GlobalPackCustomerCode=null,
                                                    $GlobalPackBarcodeType=null)
```

Parameters

- **\$CustomerNumber** (string | null)
- **\$CustomerCode** (string | null)
- **\$CollectionLocation** (string | null)
- **\$ContactPerson** (string | null)
- **\$Email** (string | null)
- **\$Name** (string | null)
- **\$Address** (*Firstred\PostNL\Entity\Address* | null)
- **\$GlobalPackCustomerCode** (string | null)
- **\$GlobalPackBarcodeType** (string | null)

Coordinates

```
class Firstred\PostNL\Entity\Coordinates
```

Class Coordinates.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$Latitude, \$Longitude)*

Properties

```
public property Firstred\PostNL\Entity\Coordinates::$defaultProperties
```

Type string[][]

```
protected static property Firstred\PostNL\Entity\Coordinates::$Latitude
```

Type string | null

```
protected static property Firstred\PostNL\Entity\Coordinates::$Longitude
```

Type string | null

Methods

public Firstred\PostNL\Entity\Coordinates::__construct(*\$Latitude=null, \$Longitude=null*)

Parameters

- **\$Latitude** (string)
- **\$Longitude** (string)

Signature

class Firstred\PostNL\Entity\Signature

Class Signature.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public* __construct(*\$GetSignatureResponseSignature, \$Warnings*)

Properties

public property Firstred\PostNL\Entity\Signature::\$defaultProperties

Type string[][]

protected static property

Firstred\PostNL\Entity\Signature::\$GetSignatureResponseSignature

Type *\Firstred\PostNL\Entity\Response\GetSignatureResponseSignature* | null

protected static property Firstred\PostNL\Entity\Signature::\$Warnings

Type *\Firstred\PostNL\Entity\Warning[]* | null

Methods

public Firstred\PostNL\Entity\Signature::__construct(*\$GetSignatureResponseSignature=null, \$Warnings=null*)

Amount

class Firstred\PostNL\Entity\Amount

Class Amount.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- `public __construct($AccountName, $AmountType, $BIC, $Currency, $IBAN, $Reference, $TransactionNumber, $Value, $VerzekerdBedrag)`
- `public setAmountType($AmountType)`
- `public xmlSerialize($writer)`

Properties

```
public property Firstred\PostNL\Entity\Amount::$defaultProperties
    Type string[][]
protected static property Firstred\PostNL\Entity\Amount::$AccountName
    Type string | null
protected static property Firstred\PostNL\Entity\Amount::$AmountType
    Type string | null
protected static property Firstred\PostNL\Entity\Amount::$BIC
    Type string | null
protected static property Firstred\PostNL\Entity\Amount::$Currency
    Type string | null
protected static property Firstred\PostNL\Entity\Amount::$IBAN
    Type string | null
protected static property Firstred\PostNL\Entity\Amount::$Reference
    Type string | null
protected static property Firstred\PostNL\Entity\Amount::$TransactionNumber
    Type string | null
protected static property Firstred\PostNL\Entity\Amount::$Value
    Type string | null
protected static property Firstred\PostNL\Entity\Amount::$VerzekerdBedrag
    Type string | null
```

Methods

```
public Firstred\PostNL\Entity\Amount::__construct($AccountName=null, $AmountType=null,
                                                    $BIC=null, $Currency=null, $IBAN=null,
                                                    $Reference=null, $TransactionNumber=null,
                                                    $Value=null, $VerzekerdBedrag=null)
```

Parameters

- **\$AccountName** (string | null)
- **\$AmountType** (string | null)
- **\$BIC** (string | null)

- **\$Currency** (string | null)
- **\$IBAN** (string | null)
- **\$Reference** (string | null)
- **\$TransactionNumber** (string | null)
- **\$Value** (string | null)

```
public Firstred\PostNL\Entity\Amount::setAmountType($AmountType=null)
```

Set amount type.

Parameters

- **\$AmountType** (string | int | null)

Returns static

```
public Firstred\PostNL\Entity\Amount::xmlSerialize($writer)
```

Return a serializable array for the XMLWriter.

Parameters

- **\$writer** (Sabre\Xml\Writer)

Returns void

Throws \InvalidArgumentException

Dimension

```
class Firstred\PostNL\Entity\Dimension
```

Class Dimension.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$Weight, \$Height, \$Length, \$Volume, \$Width)*

Properties

```
public property Firstred\PostNL\Entity\Dimension::$defaultProperties
```

Type string[][]

```
protected static property Firstred\PostNL\Entity\Dimension::$Height
```

Type string | null

```
protected static property Firstred\PostNL\Entity\Dimension::$Length
```

Type string | null

```
protected static property Firstred\PostNL\Entity\Dimension::$Volume
```

Type string | null

protected static property Firstred\PostNL\Entity\Dimension::\$**Weight**

Type string | null

protected static property Firstred\PostNL\Entity\Dimension::\$**Width**

Type string | null

Methods

public Firstred\PostNL\Entity\Dimension::__construct(*\$Weight=null, \$Height=null, \$Length=null, \$Volume=null, \$Width=null*)

Parameters

- **\$Weight** (string | null)
- **\$Height** (string | null)
- **\$Length** (string | null)
- **\$Volume** (string | null)
- **\$Width** (string | null)

Barcode

class Firstred\PostNL\Entity\Barcode

Class Barcode.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public* __construct(*\$Type, \$Range, \$Serie*)

Properties

public property Firstred\PostNL\Entity\Barcode::\$**defaultProperties**

Type string[][]

protected static property Firstred\PostNL\Entity\Barcode::\$**Type**

Type string | null

protected static property Firstred\PostNL\Entity\Barcode::\$**Range**

Type string | null

protected static property Firstred\PostNL\Entity\Barcode::\$**Serie**

Type string | null

Methods

```
public Firstred\PostNL\Entity\Barcode::__construct($Type=null, $Range=null,  
                                                    $Serie='000000000\999999999')
```

Parameters

- **\$Type** (string | null)
- **\$Range** (string | null)
- **\$Serie** (string | null)

Location

```
class Firstred\PostNL\Entity\Location
```

Class Location.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$Postalcode, \$AllowSundaySorting, \$DeliveryDate, \$DeliveryOptions, \$Options, \$Coordinates, \$CoordinatesNorthWest, \$CoordinatesSouthEast, \$City, \$Street, \$HouseNr, \$HouseNrExt, \$LocationCode, \$Saleschannel, \$TerminalType, \$RetailNetworkID, \$DownPartnerID, \$DownPartnerLocation)*
- *public setDeliveryDate(\$DeliveryDate)*
- *public setPostalcode(\$Postalcode)*
- *public setAllowSundaySorting(\$AllowSundaySorting)*
- *public xmlSerialize(\$writer)*

Properties

```
public property Firstred\PostNL\Entity\Location::$defaultProperties
```

Type string[][]

```
protected static property Firstred\PostNL\Entity\Location::$AllowSundaySorting
```

Type string | null

```
protected static property Firstred\PostNL\Entity\Location::$DeliveryDate
```

Type string | null

```
protected static property Firstred\PostNL\Entity\Location::$DeliveryOptions
```

Type string[] | null

```
protected static property Firstred\PostNL\Entity\Location::$OpeningTime
```

Type string | null

```
protected static property Firstred\PostNL\Entity\Location::$Options
```

```
    Type string[] | null
protected static property Firstred\PostNL\Entity\Location::$City
    Type string | null
protected static property Firstred\PostNL\Entity\Location::$HouseNr
    Type string | null
protected static property Firstred\PostNL\Entity\Location::$HouseNrExt
    Type string | null
protected static property Firstred\PostNL\Entity\Location::$Postalcode
    Type string | null
protected static property Firstred\PostNL\Entity\Location::$Street
    Type string | null
protected static property Firstred\PostNL\Entity\Location::$Coordinates
    Type \Firstred\PostNL\Entity\Coordinates | null
protected static property Firstred\PostNL\Entity\Location::$CoordinatesNorthWest
    Type \Firstred\PostNL\Entity\CoordinatesNorthWest | null
protected static property Firstred\PostNL\Entity\Location::$CoordinatesSouthEast
    Type \Firstred\PostNL\Entity\CoordinatesSouthEast | null
protected static property Firstred\PostNL\Entity\Location::$LocationCode
    Type string | null
protected static property Firstred\PostNL\Entity\Location::$Saleschannel
    Type string | null
protected static property Firstred\PostNL\Entity\Location::$TerminalType
    Type string | null
protected static property Firstred\PostNL\Entity\Location::$RetailNetworkID
    Type string | null
protected static property Firstred\PostNL\Entity\Location::$DownPartnerID
    Type string | null
protected static property Firstred\PostNL\Entity\Location::$DownPartnerLocation
    Type string | null
```

Methods

```
public Firstred\PostNL\Entity\Location::__construct($Postalcode=null,
                                                    $AllowSundaySorting=null,
                                                    $DeliveryDate=null,
                                                    $DeliveryOptions=null, $Options=null,
                                                    $Coordinates=null,
                                                    $CoordinatesNorthWest=null,
                                                    $CoordinatesSouthEast=null, $City=null,
                                                    $Street=null, $HouseNr=null,
                                                    $HouseNrExt=null, $LocationCode=null,
                                                    $Saleschannel=null, $TerminalType=null,
                                                    $RetailNetworkID=null,
                                                    $DownPartnerID=null,
                                                    $DownPartnerLocation=null)
```

Parameters

- **\$Postalcode** (string | null)
- **\$AllowSundaySorting** (string | null)
- **\$DeliveryDate** (string | \DateTimeInterface | null)
- **\$DeliveryOptions** (array | null)
- **\$Options** (array | null)
- **\$Coordinates** ([Firstred\PostNL\Entity\Coordinates](#) | null)
- **\$CoordinatesNorthWest** ([Firstred\PostNL\Entity\CoordinatesNorthWest](#) | null)
- **\$CoordinatesSouthEast** ([Firstred\PostNL\Entity\CoordinatesSouthEast](#) | null)
- **\$City** (string | null)
- **\$Street** (string | null)
- **\$HouseNr** (string | null)
- **\$HouseNrExt** (string | null)
- **\$LocationCode** (string | null)
- **\$Saleschannel** (string | null)
- **\$TerminalType** (string | null)
- **\$RetailNetworkID** (string | null)
- **\$DownPartnerID** (string | null)
- **\$DownPartnerLocation** (string | null)

Throws [\Firstred\PostNL\Exception\InvalidArgumentException](#)

```
public Firstred\PostNL\Entity\Location::setDeliveryDate($DeliveryDate=null)
```

Parameters

- **\$DeliveryDate** (string | \DateTimeInterface | null)

Returns static

Throws [\Firstred\PostNL\Exception\InvalidArgumentException](#)

Since 1.2.0

```
public Firstred\PostNL\Entity\Location::setPostalcode($Postalcode=null)
```

Set the postcode.

Parameters

- **\$Postalcode** (string | null)

Returns \Firstred\PostNL\Entity\Location

```
public Firstred\PostNL\Entity\Location::setAllowSundaySorting($AllowSundaySorting=null)
```

Parameters

- **\$AllowSundaySorting** (string | bool | int | null)

Returns \Firstred\PostNL\Entity\Location

Since 1.0.0

Since 1.0.0

```
public Firstred\PostNL\Entity\Location::xmlSerialize($writer)
```

Return a serializable array for the XMLWriter.

Parameters

- **\$writer** (Sabre\Xml\Writer)

Returns void

ProductOption

```
class Firstred\PostNL\Entity\ProductOption
```

Class ProductOption.

Parent Firstred\PostNL\Entity\AbstractEntity

Summary

Methods

- `public __construct($Characteristic, $Option, $Description)`
- `public static jsonDeserialize($json)`

Properties

```
public property Firstred\PostNL\Entity\ProductOption::$defaultProperties
    Type string[][]

protected static property Firstred\PostNL\Entity\ProductOption::$Characteristic
    Type string | null

protected static property Firstred\PostNL\Entity\ProductOption::$Option
    Type string | null

protected static property Firstred\PostNL\Entity\ProductOption::$Description
    Type string | null
```

Methods

```
public Firstred\PostNL\Entity\ProductOption::__construct($Characteristic=null, $Option=null,
                                                         $Description=null)
```

Parameters

- **\$Characteristic** (string | null)
- **\$Option** (string | null)
- **\$Description** (string | null)

```
public static Firstred\PostNL\Entity\ProductOption::jsonDeserialize($json)
```

Parameters

- **\$json** (stdClass)

Returns mixed | \stdClass | null

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Since 1.2.0

Shipment

```
class Firstred\PostNL\Entity\Shipment
```

Class Shipment.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- `public __construct($Addresses, $Amounts, $Barcode, $Contacts, $Content, $CollectionTimeStampEnd, $CollectionTimeStampStart, $CostCenter, $Customer, $CustomerOrderNumber, $Customs, $DeliveryAddress, $DeliveryDate, $Dimension, $DownPartnerBarcode, $DownPartnerID, $DownPartnerLocation, $Events, $Groups, $IDExpiration, $IDNumber, $IDType, $OldStatuses, $ProductCodeCollect, $ProductCodeDelivery, $ProductOptions, $ReceiverDateOfBirth, $Reference, $ReferenceCollect, $Remark, $ReturnBarcode, $ReturnReference, $StatusCode, $PhaseCode, $DateFrom, $DateTo, $DeliveryTimeStampStart, $DeliveryTimeStampEnd)`
- `public setCollectionTimeStampStart($CollectionTimeStampStart)`
- `public setCollectionTimeStampEnd($CollectionTimeStampEnd)`
- `public setDeliveryTimeStampStart($DeliveryTimeStampStart)`
- `public setDeliveryTimeStampEnd($DeliveryTimeStampEnd)`
- `public setDeliveryDate($DeliveryDate)`
- `public xmlSerialize($writer)`

Properties

public property Firstred\PostNL\Entity\Shipment::\$defaultProperties

Type string[][]

protected static property Firstred\PostNL\Entity\Shipment::\$Addresses

Type \Firstred\PostNL\Entity\Address[] | null

protected static property Firstred\PostNL\Entity\Shipment::\$Amounts

Type \Firstred\PostNL\Entity\Amount[] | null

protected static property Firstred\PostNL\Entity\Shipment::\$Barcode

Type string | null

protected static property Firstred\PostNL\Entity\Shipment::\$CollectionTimeStampEnd

Type \DateTimeInterface | null

protected static property Firstred\PostNL\Entity\Shipment::\$CollectionTimeStampStart

Type \DateTimeInterface | null

protected static property Firstred\PostNL\Entity\Shipment::\$Contacts

Type \Firstred\PostNL\Entity>Contact[] | null

protected static property Firstred\PostNL\Entity\Shipment::\$Content

Type string | null

protected static property Firstred\PostNL\Entity\Shipment::\$CostCenter

Type string | null

protected static property Firstred\PostNL\Entity\Shipment::\$CustomerOrderNumber

Type string | null

protected static property Firstred\PostNL\Entity\Shipment::\$Customer

Type \Firstred\PostNL\Entity\Customer | null

protected static property Firstred\PostNL\Entity\Shipment::\$Customs
 Type \Firstred\PostNL\Entity\Customs | null

protected static property Firstred\PostNL\Entity\Shipment::\$StatusCode
 Type string | null\$StatusCode

protected static property Firstred\PostNL\Entity\Shipment::\$PhaseCode
 Type int | null

protected static property Firstred\PostNL\Entity\Shipment::\$DateFrom
 Type \DateTimeInterface | null

protected static property Firstred\PostNL\Entity\Shipment::\$DateTo
 Type \DateTimeInterface | null

protected static property Firstred\PostNL\Entity\Shipment::\$DeliveryAddress
 Type string | null

protected static property Firstred\PostNL\Entity\Shipment::\$DeliveryTimeStampStart
 Type \DateTimeInterface | null

protected static property Firstred\PostNL\Entity\Shipment::\$DeliveryTimeStampEnd
 Type \DateTimeInterface | null

protected static property Firstred\PostNL\Entity\Shipment::\$DeliveryDate
 Type \DateTimeInterface | null

protected static property Firstred\PostNL\Entity\Shipment::\$Dimension
 Type \Firstred\PostNL\Entity\Dimension | null

protected static property Firstred\PostNL\Entity\Shipment::\$DownPartnerBarcode
 Type string | null

protected static property Firstred\PostNL\Entity\Shipment::\$DownPartnerID
 Type string | null

protected static property Firstred\PostNL\Entity\Shipment::\$DownPartnerLocation
 Type string | null

protected static property Firstred\PostNL\Entity\Shipment::\$Events
 Type \Firstred\PostNL\Entity\Event[] | null

protected static property Firstred\PostNL\Entity\Shipment::\$Groups
 Type \Firstred\PostNL\Entity\Group[] | null

protected static property Firstred\PostNL\Entity\Shipment::\$IDExpiration
 Type string | null

protected static property Firstred\PostNL\Entity\Shipment::\$IDNumber
 Type string | null

protected static property Firstred\PostNL\Entity\Shipment::\$IDType
 Type string | null

protected static property Firstred\PostNL\Entity\Shipment::\$OldStatuses
 Type string | null

protected static property Firstred\PostNL\Entity\Shipment::\$ProductCodeCollect

Type string | null

protected static property Firstred\PostNL\Entity\Shipment::\$ProductCodeDelivery

Type string | null

protected static property Firstred\PostNL\Entity\Shipment::\$ProductOptions

Type \Firstred\PostNL\Entity\ProductOption[] | null

protected static property Firstred\PostNL\Entity\Shipment::\$ReceiverDateOfBirth

Type string | null

protected static property Firstred\PostNL\Entity\Shipment::\$Reference

Type string | null

protected static property Firstred\PostNL\Entity\Shipment::\$ReferenceCollect

Type string | null

protected static property Firstred\PostNL\Entity\Shipment::\$Remark

Type string | null

protected static property Firstred\PostNL\Entity\Shipment::\$ReturnBarcode

Type string | null

protected static property Firstred\PostNL\Entity\Shipment::\$ReturnReference

Type string | null

Methods

```
public Firstred\PostNL\Entity\Shipment::__construct($Addresses=null, $Amounts=null,
                                                    $Barcode=null, $Contacts=null,
                                                    $Content=null,
                                                    $CollectionTimeStampEnd=null,
                                                    $CollectionTimeStampStart=null,
                                                    $CostCenter=null, $Customer=null,
                                                    $CustomerOrderNumber=null,
                                                    $Customs=null, $DeliveryAddress=null,
                                                    $DeliveryDate=null, $Dimension=null,
                                                    $DownPartnerBarcode=null,
                                                    $DownPartnerID=null,
                                                    $DownPartnerLocation=null, $Events=null,
                                                    $Groups=null, $IDExpiration=null,
                                                    $IDNumber=null, $IDType=null,
                                                    $OldStatuses=null,
                                                    $ProductCodeCollect=null,
                                                    $ProductCodeDelivery=null,
                                                    $ProductOptions=null,
                                                    $ReceiverDateOfBirth=null,
                                                    $Reference=null, $ReferenceCollect=null,
                                                    $Remark=null, $ReturnBarcode=null,
                                                    $ReturnReference=null, $StatusCode=null,
                                                    $PhaseCode=null, $DateFrom=null,
                                                    $DateTo=null,
                                                    $DeliveryTimeStampStart=null,
                                                    $DeliveryTimeStampEnd=null)
```

Shipment constructor.

Parameters

- **\$Addresses** (*Firstred\PostNL\Entity\Address[]* | null)
- **\$Amounts** (array | null)
- **\$Barcode** (string | null)
- **\$Contacts** (*Firstred\PostNL\Entity>Contact[]* | null)
- **\$Content** (string | null)
- **\$CollectionTimeStampEnd** (string | \DateTimeInterface | null)
- **\$CollectionTimeStampStart** (string | \DateTimeInterface | null)
- **\$CostCenter** (string | null)
- **\$Customer** (*Firstred\PostNL\Entity\Customer* | null)
- **\$CustomerOrderNumber** (string | null)
- **\$Customs** (*Firstred\PostNL\Entity\Customs* | null)
- **\$DeliveryAddress** (string | null)
- **\$DeliveryDate** (string | \DateTimeInterface | null)
- **\$Dimension** (*Firstred\PostNL\Entity\Dimension* | null)
- **\$DownPartnerBarcode** (string | null)
- **\$DownPartnerID** (string | null)
- **\$DownPartnerLocation** (string | null)
- **\$Events** (*Firstred\PostNL\Entity\Event[]* | null)
- **\$Groups** (*Firstred\PostNL\Entity\Group[]* | null)
- **\$IDExpiration** (string | null)
- **\$IDNumber** (string | null)
- **\$IDType** (string | null)
- **\$OldStatuses** (array | null)
- **\$ProductCodeCollect** (string | null)
- **\$ProductCodeDelivery** (string | null)
- **\$ProductOptions** (*Firstred\PostNL\Entity\ProductOption[]* | null)
- **\$ReceiverDateOfBirth** (string | null)
- **\$Reference** (string | null)
- **\$ReferenceCollect** (string | null)
- **\$Remark** (string | null)
- **\$ReturnBarcode** (string | null)
- **\$ReturnReference** (string | null)
- **\$StatusCode** (string | null)
- **\$PhaseCode** (int | null)
- **\$DateFrom** (string | null)
- **\$DateTo** (string | null)
- **\$DeliveryTimeStampStart** (string | \DateTimeInterface | null)
- **\$DeliveryTimeStampEnd** (string | \DateTimeInterface | null)

Throws [`\Firstred\PostNL\Exception\InvalidArgumentException`](#)

```
public Firstred\PostNL\Entity\Shipment::setCollectionTimeStampStart($CollectionTimeStampStart=null)
```

Parameters

- **\$CollectionTimeStampStart** (string | \DateTimeInterface | null)

Returns static

Throws [`\Firstred\PostNL\Exception\InvalidArgumentException`](#)

Since 1.2.0

```
public Firstred\PostNL\Entity\Shipment::setCollectionTimeStampEnd($CollectionTimeStampEnd=null)
```

Parameters

- **\$CollectionTimeStampEnd** (string | \DateTimeInterface | null)

Returns static

Throws [`\Firstred\PostNL\Exception\InvalidArgumentException`](#)

Since 1.2.0

```
public Firstred\PostNL\Entity\Shipment::setDeliveryTimeStampStart($DeliveryTimeStampStart=null)
```

Parameters

- **\$DeliveryTimeStampStart** (string | \DateTimeInterface | null)

Returns static

Throws [`\Firstred\PostNL\Exception\InvalidArgumentException`](#)

Since 1.2.0

```
public Firstred\PostNL\Entity\Shipment::setDeliveryTimeStampEnd($DeliveryTimeStampEnd=null)
```

Parameters

- **\$DeliveryTimeStampEnd** (string | \DateTimeInterface | null)

Returns static

Throws [`\Firstred\PostNL\Exception\InvalidArgumentException`](#)

Since 1.2.0

```
public Firstred\PostNL\Entity\Shipment::setDeliveryDate($DeliveryDate=null)
```

Parameters

- **\$DeliveryDate** (string | \DateTimeInterface | null)

Returns static

Throws [`\Firstred\PostNL\Exception\InvalidArgumentException`](#)

Since 1.2.0

```
public Firstred\PostNL\Entity\Shipment::xmlSerialize($writer)
```

Return a serializable array for the XMLWriter.

Parameters

- **\$writer** (Sabre\Xml\Writer)

Returns void

Status

class Firstred\PostNL\Entity\Status

Class Status.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$PhaseCode, \$PhaseDescription, \$StatusCode, \$StatusDescription, \$TimeStamp)*
- *public setTimeStamp(\$TimeStamp)*
- *public getCurrentStatusPhaseCode()*
- *public getCurrentStatusPhaseDescription()*
- *public getCurrentStatusStatusCode()*
- *public getCurrentStatusStatusDescription()*
- *public getCurrentStatusTimeStamp()*
- *public getCompleteStatusPhaseCode()*
- *public getCompleteStatusPhaseDescription()*
- *public getCompleteStatusStatusCode()*
- *public getCompleteStatusStatusDescription()*
- *public getCompleteStatusTimeStamp()*

Properties

public property Firstred\PostNL\Entity\Status::\$defaultProperties

Type string[][]

protected static property Firstred\PostNL\Entity\Status::\$PhaseCode

Type string | null

protected static property Firstred\PostNL\Entity\Status::\$PhaseDescription

Type string | null

protected static property Firstred\PostNL\Entity\Status::\$StatusCode

Type string | null

protected static property Firstred\PostNL\Entity\Status::\$StatusDescription

Type string | null

protected static property Firstred\PostNL\Entity\Status::\$TimeStamp

Type \DateTimeInterface | null

Methods

```
public Firstred\PostNL\Entity\Status::__construct($PhaseCode=null, $PhaseDescription=null,  
                                                $StatusCode=null, $StatusDescription=null,  
                                                $TimeStamp=null)
```

Status constructor.

Parameters

- **\$PhaseCode** (string | null)
- **\$PhaseDescription** (string | null)
- **\$StatusCode** (string | null)
- **\$StatusDescription** (string | null)
- **\$TimeStamp** (string | \DateTimeInterface | null)

Throws [*\Firstred\PostNL\Exception\InvalidArgumentException*](#)

```
public Firstred\PostNL\Entity\Status::setTimeStamp($TimeStamp=null)
```

Parameters

- **\$TimeStamp** (string | \DateTimeInterface | null)

Returns static

Throws [*\Firstred\PostNL\Exception\InvalidArgumentException*](#)

Since 1.2.0

```
public Firstred\PostNL\Entity\Status::getCurrentStatusPhaseCode()
```

Backward compatible with SOAP API

Returns string | null

Since 1.2.0

Deprecated 1.4.1 SOAP support is going to be removed

```
public Firstred\PostNL\Entity\Status::getCurrentStatusPhaseDescription()
```

Backward compatible with SOAP API

Returns string | null

Since 1.2.0

Deprecated 1.4.1 SOAP support is going to be removed

```
public Firstred\PostNL\Entity\Status::getCurrentStatusStatusCode()
```

Backward compatible with SOAP API

Returns string | null

Since 1.2.0

Deprecated 1.4.1 SOAP support is going to be removed

```
public Firstred\PostNL\Entity\Status::getCurrentStatusStatusDescription()
```

Backward compatible with SOAP API

Returns string | null

Since 1.2.0

Deprecated 1.4.1 SOAP support is going to be removed

```
public Firstred\PostNL\Entity\Status::getCurrentStatusTimeStamp()
```

Backward compatible with SOAP API

Returns string | null

Since 1.2.0

Deprecated 1.4.1 SOAP support is going to be removed

```
public Firstred\PostNL\Entity\Status::getCompleteStatusPhaseCode()
```

Backward compatible with SOAP API

Returns string | null

Since 1.2.0

Deprecated 1.4.1 SOAP support is going to be removed

```
public Firstred\PostNL\Entity\Status::getCompleteStatusPhaseDescription()
```

Backward compatible with SOAP API

Returns string | null

Since 1.2.0

Deprecated 1.4.1 SOAP support is going to be removed

```
public Firstred\PostNL\Entity\Status::getCompleteStatusStatusCode()
```

Backward compatible with SOAP API

Returns string | null

Since 1.2.0

Deprecated 1.4.1 SOAP support is going to be removed

```
public Firstred\PostNL\Entity\Status::getCompleteStatusStatusDescription()
```

Backward compatible with SOAP API

Returns string | null

Since 1.2.0

Deprecated 1.4.1 SOAP support is going to be removed

```
public Firstred\PostNL\Entity\Status::getCompleteStatusTimeStamp()
```

Backward compatible with SOAP API

Returns string | null

Since 1.2.0

Deprecated 1.4.1 SOAP support is going to be removed

Sustainability

```
class Firstred\PostNL\Entity\Sustainability
```

Class Sustainability.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$Code, \$Description)*

Properties

```
public property Firstred\PostNL\Entity\Sustainability::$defaultProperties
```

Type string[][]

```
protected static property Firstred\PostNL\Entity\Sustainability::$Code
```

Type string | null

```
protected static property Firstred\PostNL\Entity\Sustainability::$Description
```

Type string | null

Methods

```
public Firstred\PostNL\Entity\Sustainability::__construct($Code=null, $Description=null)
```

Parameters

- **\$Code** (string | null)
- **\$Description** (string | null)

Timeframe

class Firstred\PostNL\Entity\Timeframe

Class Timeframe.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$City, \$CountryCode, \$Date, \$EndDate, \$HouseNr, \$HouseNrExt, \$Options, \$PostalCode, \$Street, \$SundaySorting, \$Interval, \$Range, \$Timeframes, \$StartDate)*
- *public setDate(\$Date)*
- *public setStartDate(\$StartDate)*
- *public setEndDate(\$EndDate)*
- *public setPostalCode(\$PostalCode)*
- *public setSundaySorting(\$SundaySorting)*
- *public jsonSerialize()*
- *public xmlSerialize(\$writer)*

Properties

public property Firstred\PostNL\Entity\Timeframe::\$defaultProperties

Type string[][]

protected static property Firstred\PostNL\Entity\Timeframe::\$City

Type string | null

protected static property Firstred\PostNL\Entity\Timeframe::\$CountryCode

Type string | null

protected static property Firstred\PostNL\Entity\Timeframe::\$Date

Type \DateTimeInterface | null

protected static property Firstred\PostNL\Entity\Timeframe::\$EndDate

Type \DateTimeInterface | null

protected static property Firstred\PostNL\Entity\Timeframe::\$HouseNr

Type string | null

protected static property Firstred\PostNL\Entity\Timeframe::\$HouseNrExt

Type string | null

protected static property Firstred\PostNL\Entity\Timeframe::\$Options

Type string[] | null

protected static property Firstred\PostNL\Entity\Timeframe::\$PostalCode

Type string | null

protected static property Firstred\PostNL\Entity\Timeframe::\$StartDate

Type string | null

protected static property Firstred\PostNL\Entity\Timeframe::\$Street

Type string | null

protected static property Firstred\PostNL\Entity\Timeframe::\$SundaySorting

Type bool | null

protected static property Firstred\PostNL\Entity\Timeframe::\$Interval

Type string | null

protected static property Firstred\PostNL\Entity\Timeframe::\$TimeframeRange

Type string | null

protected static property Firstred\PostNL\Entity\Timeframe::\$Timeframes

Type \Firstred\PostNL\Entity\TimeframeTimeFrame[] | \Firstred\PostNL\Entity\Timeframe[] | null

Methods

```
public Firstred\PostNL\Entity\Timeframe::__construct( $City=null, $CountryCode=null,
                                                    $Date=null, $EndDate=null,
                                                    $HouseNr=null, $HouseNrExt=null,
                                                    $Options=\\, $PostalCode=null,
                                                    $Street=null, $SundaySorting='false',
                                                    $Interval=null, $Range=null,
                                                    $Timeframes=null, $StartDate=null)
```

Timeframe constructor.

Parameters

- **\$City** (string | null)
- **\$CountryCode** (string | null)
- **\$Date** (string | \DateTimeInterface | null)
- **\$EndDate** (string | \DateTimeInterface | null)
- **\$HouseNr** (string | null)
- **\$HouseNrExt** (string | null)
- **\$Options** (array | null)
- **\$PostalCode** (string | null)
- **\$Street** (string | null)
- **\$SundaySorting** (string | null)
- **\$Interval** (string | null)
- **\$Range** (string | null)
- **\$Timeframes** (*Firstred\PostNL\Entity\Timeframe[]* | null)
- **\$StartDate** (string | \DateTimeInterface | null)

Throws \Firstred\PostNL\Exception\InvalidArgumentException

```
public Firstred\PostNL\Entity\Timeframe::setDate($Date=null)
```

Parameters

- **\$Date** (null)

Returns static**Throws** [*\Firstred\PostNL\Exception\InvalidArgumentException*](#)**Since** 1.2.0

```
public Firstred\PostNL\Entity\Timeframe::setStartDate($StartDate=null)
```

Parameters

- **\$StartDate** (string | \DateTimeInterface | null)

Returns static**Throws** [*\Firstred\PostNL\Exception\InvalidArgumentException*](#)**Since** 1.2.0

```
public Firstred\PostNL\Entity\Timeframe::setEndDate($EndDate=null)
```

Parameters

- **\$EndDate** (string | \DateTimeInterface | null)

Returns static**Throws** [*\Firstred\PostNL\Exception\InvalidArgumentException*](#)**Since** 1.2.0

```
public Firstred\PostNL\Entity\Timeframe::setPostalCode($PostalCode=null)
```

Set the postcode.

Parameters

- **\$PostalCode** (string | null)

Returns static

```
public Firstred\PostNL\Entity\Timeframe::setSundaySorting($SundaySorting=null)
```

Parameters

- **\$SundaySorting** (string | bool | int | null)

Returns [*\Firstred\PostNL\Entity\Timeframe*](#)**Since** 1.0.0**Since** 1.0.0

```
public Firstred\PostNL\Entity\Timeframe::jsonSerialize()
```

Return a serializable array for `json\_encode`.

Returns array

```
public Firstred\PostNL\Entity\Timeframe::xmlSerialize($writer)
```

Return a serializable array for the XMLWriter.

Parameters

- **\$writer** (Sabre\Xml\Writer)

Returns void

Throws [*\Firstred\PostNL\Exception\InvalidArgumentException*](#)

Customs

class Firstred\PostNL\Entity\Customs

Class Customs.

Parent [*Firstred\PostNL\Entity\AbstractEntity*](#)

Summary**Methods**

- *public __construct(\$Certificate, \$CertificateNr, \$Content, \$Currency, \$HandleAsNonDeliverable, \$Invoice, \$InvoiceNr, \$License, \$LicenseNr, \$ShipmentType, \$TrustedShipperID, \$TransactionCode, \$TransactionDescription, \$ImporterReferenceCode)*

Properties

public property Firstred\PostNL\Entity\Customs::\$defaultProperties

Type string[][]

protected static property Firstred\PostNL\Entity\Customs::\$Certificate

Type string | null

protected static property Firstred\PostNL\Entity\Customs::\$CertificateNr

Type string | null

protected static property Firstred\PostNL\Entity\Customs::\$Content

Type [*\Firstred\PostNL\Entity\Content\[\]*](#) | null

protected static property Firstred\PostNL\Entity\Customs::\$Currency

Type string | null

protected static property Firstred\PostNL\Entity\Customs::\$HandleAsNonDeliverable

Type string | null

protected static property Firstred\PostNL\Entity\Customs::\$Invoice

Type string | null

protected static property Firstred\PostNL\Entity\Customs::\$InvoiceNr

Type string | null

protected static property Firstred\PostNL\Entity\Customs::\$License

Type string | null

protected static property Firstred\PostNL\Entity\Customs::\$LicenseNr

Type string | null

protected static property Firstred\PostNL\Entity\Customs::\$ShipmentType

Type string | null

protected static property Firstred\PostNL\Entity\Customs::\$TrustedShipperID

Type string | null

protected static property Firstred\PostNL\Entity\Customs::\$TransactionCode

Type string | null

protected static property Firstred\PostNL\Entity\Customs::\$TransactionDescription

Type string | null

protected static property Firstred\PostNL\Entity\Customs::\$ImporterReferenceCode

Type string | null

Methods

public Firstred\PostNL\Entity\Customs::__construct(*\$Certificate=null*, *\$CertificateNr=null*,
\$Content=null, *\$Currency=null*,
\$HandleAsNonDeliverable=null,
\$Invoice=null, *\$InvoiceNr=null*,
\$License=null, *\$LicenseNr=null*,
\$ShipmentType=null,
\$TrustedShipperID=null,
\$TransactionCode=null,
\$TransactionDescription=null,
\$ImporterReferenceCode=null)

Parameters

- **\$Certificate** (string | null)
- **\$CertificateNr** (string | null)
- **\$Content** (*Firstred\PostNL\Entity\Content[]* | null)
- **\$Currency** (string | null)
- **\$HandleAsNonDeliverable** (string | null)
- **\$Invoice** (string | null)
- **\$InvoiceNr** (string | null)
- **\$License** (string | null)
- **\$LicenseNr** (string | null)
- **\$ShipmentType** (string | null)
- **\$TrustedShipperID** (string | null)
- **\$TransactionCode** (string | null)
- **\$TransactionDescription** (string | null)
- **\$ImporterReferenceCode** (string | null)

TimeframeTimeFrame

class Firstred\PostNL\Entity\TimeframeTimeFrame

Class TimeframeTimeFrame.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public* *__construct*(\$GetSentDate, \$From, \$To, \$Options, \$Sustainability)
- *public* *setDate*(\$Date)
- *public static* *jsonDeserialize*(\$json)

Properties

public property Firstred\PostNL\Entity\TimeframeTimeFrame::\$defaultProperties

Type string[][]

protected static property Firstred\PostNL\Entity\TimeframeTimeFrame::\$Date

Type string | null

protected static property Firstred\PostNL\Entity\TimeframeTimeFrame::\$From

Type string | null

protected static property Firstred\PostNL\Entity\TimeframeTimeFrame::\$Options

Type string[] | null

protected static property Firstred\PostNL\Entity\TimeframeTimeFrame::\$To

Type string | null

protected static property Firstred\PostNL\Entity\TimeframeTimeFrame::\$Sustainability

Type *\Firstred\PostNL\Entity\Sustainability* | null

Methods

public Firstred\PostNL\Entity\TimeframeTimeFrame::__construct(*\$GetSentDate=null,*
\$From=null, \$To=null,
\$Options=null,
\$Sustainability=null)

Parameters

- **\$GetSentDate** (string | \DateTimeInterface | null)
- **\$From** (string | null)
- **\$To** (string | null)
- **\$Options** (string[] | null)
- **\$Sustainability** (*Firstred\PostNL\Entity\Sustainability* | null)

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

public Firstred\PostNL\Entity\TimeframeTimeFrame::**setDate**(\$Date=null)

Parameters

- **\$Date** (string | \DateTimeInterface | null)

Returns static

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Since 1.2.0

public static Firstred\PostNL\Entity\TimeframeTimeFrame::**jsonDeserialize**(\$json)

Parameters

- **\$json** (stdClass)

Returns mixed | \stdClass | null

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Since 1.2.0

CoordinatesNorthWest

class Firstred\PostNL\Entity\CoordinatesNorthWest

Class CoordinatesNorthWest.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$Latitude, \$Longitude)*

Properties

public property Firstred\PostNL\Entity\CoordinatesNorthWest::\$defaultProperties

Type string[][]

protected static property Firstred\PostNL\Entity\CoordinatesNorthWest::\$Latitude

Type string | null

protected static property Firstred\PostNL\Entity\CoordinatesNorthWest::\$Longitude

Type string | null

Methods

```
public Firstred\PostNL\Entity\CoordinatesNorthWest::__construct($Latitude=null,
                                                                $Longitude=null)
```

Parameters

- **\$Latitude** (string)
- **\$Longitude** (string)

CutOffTime

```
class Firstred\PostNL\Entity\CutOffTime
```

Class CutOffTime.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$Day, \$Time, \$Available)*
- *public xmlSerialize(\$writer)*

Properties

```
public property Firstred\PostNL\Entity\CutOffTime::$defaultProperties
```

Type string[][]

```
protected static property Firstred\PostNL\Entity\CutOffTime::$Day
```

Type string | null

```
protected static property Firstred\PostNL\Entity\CutOffTime::$Time
```

Type string | null

```
protected static property Firstred\PostNL\Entity\CutOffTime::$Available
```

Type bool | null

Methods

```
public Firstred\PostNL\Entity\CutOffTime::__construct($Day=null, $Time=null,
                                                       $Available=null)
```

Parameters

- **\$Day** (string)
- **\$Time** (string)
- **\$Available** (bool)

```
public Firstred\PostNL\Entity\CutOffTime::xmlSerialize($writer)
```

Return a serializable array for the XMLWriter.

Parameters

- **\$writer** (Sabre\Xml\Writer)

Returns void

Content

```
class Firstred\PostNL\Entity\Content
```

Class Content.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Summary

Methods

- *public __construct(\$CountryOfOrigin, \$Description, \$HSTariffNr, \$Quantity, \$Value, \$Weight, \$Content)*

Properties

```
public property Firstred\PostNL\Entity\Content::$defaultProperties
```

Type string[][]

```
protected static property Firstred\PostNL\Entity\Content::$CountryOfOrigin
```

Type string | null

```
protected static property Firstred\PostNL\Entity\Content::$Description
```

Type string | null

```
protected static property Firstred\PostNL\Entity\Content::$HSTariffNr
```

Type string | null

```
protected static property Firstred\PostNL\Entity\Content::$Quantity
```

Type string | null

```
protected static property Firstred\PostNL\Entity\Content::$Value
```

Type string | null

```
protected static property Firstred\PostNL\Entity\Content::$Weight
```

Type string | null

```
protected static property Firstred\PostNL\Entity\Content::$Content
```

Type *\Firstred\PostNL\Entity\Content[]* | null

Methods

```
public Firstred\PostNL\Entity\Content::__construct($CountryOfOrigin=null, $Description=null,  
                                                    $HSTariffNr=null, $Quantity=null,  
                                                    $Value=null, $Weight=null, $Content=null)
```

Parameters

- **\$CountryOfOrigin** (string | null)
- **\$Description** (string | null)
- **\$HSTariffNr** (string | null)
- **\$Quantity** (string | null)
- **\$Value** (string | null)
- **\$Weight** (string | null)
- **\$Content** (*Firstred\PostNL\Entity\Content[]* | null)

OpeningHours

```
class Firstred\PostNL\Entity\OpeningHours
```

Class OpeningHours.

Parent *Firstred\PostNL\Entity\AbstractEntity*

Implements *ArrayAccess* *Iterator*

Summary

Methods

- *public* __construct(*\$Monday*, *\$Tuesday*, *\$Wednesday*, *\$Thursday*, *\$Friday*, *\$Saturday*, *\$Sunday*)
- *public static* jsonDeserialize(*\$json*)
- *public* toArray()
- *public* offsetExists(*\$offset*)
- *public* offsetGet(*\$offset*)
- *public* offsetSet(*\$offset*, *\$value*)
- *public* offsetUnset(*\$offset*)
- *public* current()
- *public* next()
- *public* key()
- *public* valid()
- *public* rewind()
- *private static* findCurrentDayString(*\$currentDay*)

Properties

```
private static property Firstred\PostNL\Entity\OpeningHours::$currentDay
public property Firstred\PostNL\Entity\OpeningHours::$defaultProperties
    Type string[][]
protected static property Firstred\PostNL\Entity\OpeningHours::$Monday
    Type string | array | null
protected static property Firstred\PostNL\Entity\OpeningHours::$Tuesday
    Type string | array | null
protected static property Firstred\PostNL\Entity\OpeningHours::$Wednesday
    Type string | array | null
protected static property Firstred\PostNL\Entity\OpeningHours::$Thursday
    Type string | array | null
protected static property Firstred\PostNL\Entity\OpeningHours::$Friday
    Type string | array | null
protected static property Firstred\PostNL\Entity\OpeningHours::$Saturday
    Type string | array | null
protected static property Firstred\PostNL\Entity\OpeningHours::$Sunday
    Type string | array | null
```

Methods

```
public Firstred\PostNL\Entity\OpeningHours::__construct($Monday=null, $Tuesday=null,
                                                         $Wednesday=null, $Thursday=null,
                                                         $Friday=null, $Saturday=null,
                                                         $Sunday=null)
```

OpeningHours constructor.

Parameters

- **\$Monday** (string | array | null)
- **\$Tuesday** (string | array | null)
- **\$Wednesday** (string | array | null)
- **\$Thursday** (string | array | null)
- **\$Friday** (string | array | null)
- **\$Saturday** (string | array | null)
- **\$Sunday** (string | array | null)

```
public static Firstred\PostNL\Entity\OpeningHours::jsonDeserialize($json)
```

Deserialize opening hours

Parameters

- **\$json** (stdClass)

Returns *\Firstred\PostNL\Entity\OpeningHours*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Since 1.0.0

public Firstred\PostNL\Entity\OpeningHours::toArray()

Returns array

public Firstred\PostNL\Entity\OpeningHours::offsetExists(\$offset)

Parameters

- **\$offset** (mixed)

Returns bool

Since 1.2.0

public Firstred\PostNL\Entity\OpeningHours::offsetGet(\$offset)

Parameters

- **\$offset** (mixed)

Returns mixed

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Since 1.2.0

public Firstred\PostNL\Entity\OpeningHours::offsetSet(\$offset, \$value)

Parameters

- **\$offset** (mixed)
- **\$value** (mixed)

Since 1.2.0

public Firstred\PostNL\Entity\OpeningHours::offsetUnset(\$offset)

Parameters

- **\$offset** (mixed)

Since 1.2.0

public Firstred\PostNL\Entity\OpeningHours::current()

Returns mixed

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Since 1.2.0

public Firstred\PostNL\Entity\OpeningHours::next()

Since 1.2.0

public Firstred\PostNL\Entity\OpeningHours::key()

Returns string

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Since 1.2.0

public Firstred\PostNL\Entity\OpeningHours::valid()

Returns bool

Since 1.2.0

public Firstred\PostNL\Entity\OpeningHours::rewind()

Since 1.2.0

private static Firstred\PostNL\Entity\OpeningHours::findCurrentDayString(*\$currentDay*)

Parameters

- *\$currentDay* (mixed)

Returns string

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Since 1.2.0

Exception

\Firstred\PostNL\Exception

Namespaces

Promise

\Firstred\PostNL\Exception\Promise

Classes

RejectionException

class Firstred\PostNL\Exception\Promise\RejectionException

A special exception that is thrown when waiting on a rejected promise.

The reason value is available via the `getReason()` method.

Parent RuntimeException

Summary

Methods

- `public __construct($reason, $description)`
- `public getReason()`

Properties

private static property Firstred\PostNL\Exception\Promise\RejectionException::\$reason

Type mixed Rejection reason.

Methods

public Firstred\PostNL\Exception\Promise\RejectionException::__construct(*\$reason*, *\$description=null*)

Parameters

- **\$reason** (mixed) rejection reason
- **\$description** (string) Optional description

public Firstred\PostNL\Exception\Promise\RejectionException::getReason()

Returns the rejection reason.

Returns mixed

CancellationException

class Firstred\PostNL\Exception\Promise\CancellationException

Exception that is set as the reason for a promise that has been cancelled.

Parent *Firstred\PostNL\Exception\Promise\RejectionException*

Summary

AggregateException

class Firstred\PostNL\Exception\Promise\AggregateException

Exception thrown when too many errors occur in the some() or any() methods.

Parent *Firstred\PostNL\Exception\Promise\RejectionException*

Summary

Methods

- *public __construct(\$msg, \$reasons)*

Methods

public Firstred\PostNL\Exception\Promise\AggregateException::__construct(*\$msg, \$reasons*)

AggregateException constructor.

Parameters

- *\$msg* (mixed)
- *\$reasons* (array)

Classes

ApiConnectionException

class Firstred\PostNL\Exception\ApiConnectionException

Class ApiConnectionException.

Thrown when there is a problem connecting to the CIF API.

Parent *Firstred\PostNL\Exception\ApiException*

Summary

Methods

- `public __construct($message, $code, $body, $jsonBody, $headers)`
- `public getBody()`
- `public getJsonBody()`
- `public getHeaders()`

Properties

protected static property Firstred\PostNL\Exception\ApiConnectionException::\$body
Type string

protected static property Firstred\PostNL\Exception\ApiConnectionException::\$jsonBody
Type object

protected static property Firstred\PostNL\Exception\ApiConnectionException::\$headers
Type array

Methods

public Firstred\PostNL\Exception\ApiConnectionException::__construct(*\$message=\\',
\$code=0, \$body=null,
\$jsonBody=null,
\$headers=null*)

ApiConnectionException constructor.

Parameters

- **\$message** (string)
- **\$code** (int)
- **\$body** (string | null)
- **\$jsonBody** (object | null)
- **\$headers** (array | null)

public Firstred\PostNL\Exception\ApiConnectionException::getBody()

Returns string

public Firstred\PostNL\Exception\ApiConnectionException::getJsonBody()

Returns object

public Firstred\PostNL\Exception\ApiConnectionException::getHeaders()

Returns array

NotSupportedException

class Firstred\PostNL\Exception\NotSupportedException

Class NotSupportedException

Thrown when a feature is not supported (anymore).

Parent *Firstred\PostNL\Exception\InvalidArgumentException*

Summary

ApiException

class Firstred\PostNL\Exception\ApiException

Class ApiException.

Group of API exceptions.

Parent *Firstred\PostNL\Exception\PostNLException*

Summary

InvalidMessageTimeStampException

class Firstred\PostNL\Exception\InvalidMessageTimeStampException

Class InvalidMessageTimeStampException.

Thrown when the timestamp of a `Message` entity is invalid.

Parent *Firstred\PostNL\Exception\InvalidArgumentException*

Summary

InvalidApiModeException

class Firstred\PostNL\Exception\InvalidApiModeException

Class InvalidApiModeException.

Thrown when an invalid API mode has been selected.

Parent *Firstred\PostNL\Exception\InvalidArgumentException*

Summary

InvalidMethodException

class Firstred\PostNL\Exception\InvalidMethodException

Class InvalidMethodException.

Thrown when an invalid method is called.

Parent *Firstred\PostNL\Exception\HttpClientException*

Summary

ResponseException

class Firstred\PostNL\Exception\ResponseException

Class ResponseException.

Thrown when there was a problem with the response returned by the CIF API.

Parent *Firstred\PostNL\Exception\ApiException*

Summary

Methods

- *public __construct(\$message, \$code, \$previous, \$response)*
- *public setResponse(\$response)*
- *public getResponse()*

Properties

private static property Firstred\PostNL\Exception\ResponseException::\$response
Type \Psr\Http\Message\ResponseInterface

Methods

```
public Firstred\PostNL\Exception\ResponseException::__construct($message='', $code=0,
                                                                $previous=null,
                                                                $response=null)
```

ResponseException constructor.

Parameters

- **\$message** (string)
- **\$code** (int)
- **\$previous** (Exception | null)
- **\$response** (Psr\Http\Message\ResponseInterface | null)

```
public Firstred\PostNL\Exception\ResponseException::setResponse($response)
```

Parameters

- **\$response** (Psr\Http\Message\ResponseInterface)

```
public Firstred\PostNL\Exception\ResponseException::getResponse()
```

Returns \Psr\Http\Message\ResponseInterface

InvalidBarcodeException

```
class Firstred\PostNL\Exception\InvalidBarcodeException
```

Class InvalidBarcodeException.

Thrown when an invalid barcode has been passed.

Parent *Firstred\PostNL\Exception\InvalidArgumentException*

Summary

CifException

```
class Firstred\PostNL\Exception\CifException
```

Class CifException.

Thrown when the CIF API has a fatal error.

Parent *Firstred\PostNL\Exception\ApiException*

Summary

Methods

- `public __construct($message, $code, $previous)`
- `public getMessagesDescriptionsAndCodes()`

Properties

protected static property Firstred\PostNL\Exception\CifException::\$messages

Type array

Methods

public Firstred\PostNL\Exception\CifException::__construct(*\$message=*, *\$code=0*,
\$previous=null)

CifException constructor.

Parameters

- **\$message** (string | string[]) In case of multiple errors, the format looks like:
['description' => string <The description>, 'message' => string <The error message>, 'code'
=> int <The error code>] The code param will be discarded if *\$message* is an array * **\$code**
(int) * **\$previous** (Throwable | null)

public Firstred\PostNL\Exception\CifException::getMessagesDescriptionsAndCodes()

Get error messages and codes.

Returns array | string | string[]

CifDownException

class Firstred\PostNL\Exception\CifDownException

Class CifDownException.

Thrown when the CIF API is down.

Parent *Firstred\PostNL\Exception\ApiException*

Summary

PostNLException

class Firstred\PostNL\Exception\PostNLException

Class AbstractException

Group of exceptions that can be thrown by this library.

Parent Exception

Summary

InvalidArgumentException

class Firstred\PostNL\Exception\InvalidArgumentException

Class InvalidArgumentException.

Group of exceptions that are the result of an invalid passed argument.

Parent *Firstred\PostNL\Exception\PostNLException*

Summary

HttpClientException

class Firstred\PostNL\Exception\HttpClientException

Class HttpClientException.

Thrown when the HTTP Client has an error.

Parent *Firstred\PostNL\Exception\PostNLException*

Summary

Methods

- *public __construct(\$message, \$code, \$previous, \$response)*
- *public setResponse(\$response)*
- *public getResponse()*

Properties

```
private static property Firstred\PostNL\Exception\HttpClientException::$response
    Type \Psr\Http\Message\ResponseInterface
```

Methods

```
public Firstred\PostNL\Exception\HttpClientException::__construct($message='', $code=0,
                                                                    $previous=null,
                                                                    $response=null)
```

ResponseException constructor.

Parameters

- **\$message** (string)
- **\$code** (int)
- **\$previous** (Exception | null)
- **\$response** (Psr\Http\Message\ResponseInterface | null)

```
public Firstred\PostNL\Exception\HttpClientException::setResponse($response)
```

Parameters

- **\$response** (Psr\Http\Message\ResponseInterface)

```
public Firstred\PostNL\Exception\HttpClientException::getResponse()
```

Returns \Psr\Http\Message\ResponseInterface

InvalidConfigurationException

```
class Firstred\PostNL\Exception\InvalidConfigurationException
```

Class InvalidConfigurationException.

Thrown when there is a configuration error.

Parent *Firstred\PostNL\Exception\InvalidArgumentException*

Summary

NotImplementedException

```
class Firstred\PostNL\Exception\NotImplementedException
```

Class NotImplementedException.

Thrown when a feature is not implemented (yet).

Parent *Firstred\PostNL\Exception\InvalidArgumentException*

Summary

ShipmentNotFoundException

class Firstred\PostNL\Exception\ShipmentNotFoundException

Class InvalidArgumentException.

Thrown when a `Shipment` object could not be found.

Parent *Firstred\PostNL\Exception\NotFoundException*

Summary

NotFoundException

class Firstred\PostNL\Exception\NotFoundException

Class NotFoundException.

Thrown when (a) requested object(s) could not be found.

Parent *Firstred\PostNL\Exception\ApiException*

Summary

Factory

\Firstred\PostNL\Factory

Interfaces

StreamFactoryInterface

interface Firstred\PostNL\Factory\StreamFactoryInterface

Factory for PSR-7 Stream.

Summary

Methods

- `public createStream($content)`
- `public createStreamFromFile($filename, $mode)`
- `public createStreamFromResource($resource)`

Methods

public Firstred\PostNL\Factory\StreamFactoryInterface::createStream(*\$content=*)

Create a new stream from a string.

The stream SHOULD be created with a temporary resource.

Parameters

- **\$content** (string) String content with which to populate the stream.

Returns \Psr\Http\Message\StreamInterface

public Firstred\PostNL\Factory\StreamFactoryInterface::createStreamFromFile(*\$filename*,
\$mode='r')

Create a stream from an existing file.

The file MUST be opened using the given mode, which may be any mode supported by the ``fopen`` function.

The ``$filename`` MAY be any string supported by ``fopen()``.

Parameters

- **\$filename** (string) Filename or stream URI to use as basis of stream.
- **\$mode** (string) Mode with which to open the underlying filename/stream.

Returns \Psr\Http\Message\StreamInterface

Throws \RuntimeException If the file cannot be opened.

Throws \InvalidArgumentException If the mode is invalid.

Throws \RuntimeException If the file cannot be opened.

Throws \InvalidArgumentException If the mode is invalid.

public Firstred\PostNL\Factory\StreamFactoryInterface::createStreamFromResource(*\$resource*)

Create a new stream from an existing resource.

The stream MUST be readable and may be writable.

Parameters

- **\$resource** (resource) PHP resource to use as basis of stream.

Returns \Psr\Http\Message\StreamInterface

ResponseFactoryInterface

interface Firstred\PostNL\Factory\ResponseFactoryInterface

Factory for PSR-7 Response.

This factory contract can be reused in Message and Server Message factories.

FOR BACKWARD COMPATIBLE REASONS - NOT COMPATIBLE WITH SYMFONY HTTP CLIENT

Summary

Methods

- *public createResponse(\$code, \$reasonPhrase)*

Methods

public Firstred\PostNL\Factory\ResponseFactoryInterface::createResponse(*\$code=200, \$reasonPhrase=''*)

Creates a new PSR-7 response.

Parameters

- **\$code** (int)
- **\$reasonPhrase** (string | null)

Returns \Psr\Http\Message\ResponseInterface

RequestFactoryInterface

interface Firstred\PostNL\Factory\RequestFactoryInterface

Factory for PSR-7 Request.

Summary

Methods

- `public createRequest($method, $uri)`

Methods

public Firstred\PostNL\Factory\RequestFactoryInterface::createRequest(*\$method*, *\$uri*)

Creates a new PSR-7 request.

Parameters

- **\$method** (string)
- **\$uri** (string | \Psr\Http\Message\UriInterface)

Returns \Psr\Http\Message\RequestInterface

Classes

GuzzleResponseFactory

class Firstred\PostNL\Factory\GuzzleResponseFactory

Class GuzzleResponseFactory

Implements *Firstred\PostNL\Factory\ResponseFactoryInterface*

Summary

Methods

- `public createResponse($code, $reasonPhrase)`

Methods

public Firstred\PostNL\Factory\GuzzleResponseFactory::createResponse(*\$code=200*,
\$reasonPhrase=)

Creates a new PSR-7 response.

Parameters

- **\$code** (int)
- **\$reasonPhrase** (string | null)

Returns \Psr\Http\Message\ResponseInterface

GuzzleRequestFactory

class Firstred\PostNL\Factory\GuzzleRequestFactory

Class GuzzleRequestFactory

Implements *Firstred\PostNL\Factory\RequestFactoryInterface*

Summary

Methods

- *public createRequest(\$method, \$uri)*

Methods

public Firstred\PostNL\Factory\GuzzleRequestFactory::createRequest(\$method, \$uri)

Creates a new PSR-7 request.

Parameters

- **\$method** (string)
- **\$uri** (string | \Psr\Http\Message\UriInterface)

Returns \Psr\Http\Message\RequestInterface

GuzzleStreamFactory

class Firstred\PostNL\Factory\GuzzleStreamFactory

Class GuzzleStreamFactory

Implements *Firstred\PostNL\Factory\StreamFactoryInterface*

Summary

Methods

- *public createStream(\$content)*
- *public createStreamFromFile(\$file, \$mode)*
- *public createStreamFromResource(\$resource)*

Methods

```
public Firstred\PostNL\Factory\GuzzleStreamFactory::createStream($content=\')
```

Creates a new stream from a string.

Parameters

- ***\$content*** (string)

Returns \Psr\Http\Message\StreamInterface

```
public Firstred\PostNL\Factory\GuzzleStreamFactory::createStreamFromFile($file,  
                                                                    $mode='r')
```

Creates a new PSR-7 stream from file.

Parameters

- ***\$file*** (string)
- ***\$mode*** (string)

Returns \Psr\Http\Message\StreamInterface

```
public Firstred\PostNL\Factory\GuzzleStreamFactory::createStreamFromResource($resource)
```

Creates a new PSR-7 stream from resource.

Parameters

- ***\$resource*** (resource)

Returns \Psr\Http\Message\StreamInterface

HttpClient

\Firstred\PostNL\HttpClient

Interfaces

ClientInterface

```
interface Firstred\PostNL\HttpClient\ClientInterface
```

Interface ClientInterface.

Summary

Methods

- `public getLogger()`
- `public setLogger($logger)`
- `public static getInstance()`
- `public addOrUpdateRequest($id, $request)`
- `public setVerify($verify)`
- `public getVerify()`
- `public removeRequest($id)`
- `public clearRequests()`
- `public doRequest($request)`
- `public doRequests($requests)`

Methods

public Firstred\PostNL\HttpClient\ClientInterface::getLogger()

Get the logger.

Returns \Psr\Log\LoggerInterface

public Firstred\PostNL\HttpClient\ClientInterface::setLogger(\$logger)

Set the logger.

Parameters

- **\$logger** (Psr\Log\LoggerInterface)

public static Firstred\PostNL\HttpClient\ClientInterface::getInstance()

Get the HTTP Client instance.

Returns static

public Firstred\PostNL\HttpClient\ClientInterface::addOrUpdateRequest(\$id, \$request)

Adds a request to the list of pending requests

Using the ID you can replace a request.

Parameters

- **\$id** (string) Request ID
- **\$request** (Psr\Http\Message\RequestInterface) PSR-7 request

Returns int | string

public Firstred\PostNL\HttpClient\ClientInterface::setVerify(\$verify)

Set the verify setting.

Parameters

- **\$verify** (bool | string)

Returns static

Deprecated

```
public Firstred\PostNL\HttpClient\ClientInterface::getVerify()
```

Return verify setting.

Returns bool | string

Deprecated

```
public Firstred\PostNL\HttpClient\ClientInterface::removeRequest($id)
```

Remove a request from the list of pending requests.

Parameters

- **\$id** (string)

```
public Firstred\PostNL\HttpClient\ClientInterface::clearRequests()
```

Clear all requests.

```
public Firstred\PostNL\HttpClient\ClientInterface::doRequest($request)
```

Do a single request.

Exceptions are captured into the result array

Parameters

- **\$request** (Psr\Http\Message\RequestInterface)

Returns \Psr\Http\Message\ResponseInterface

Throws [\Firstred\PostNL\Exception\HttpClientException](#)

```
public Firstred\PostNL\HttpClient\ClientInterface::doRequests( $requests=\\)
```

Do all async requests.

Exceptions are captured into the result array

Parameters

- **\$requests** (Psr\Http\Message\RequestInterface[])

Returns \Psr\Http\Message\ResponseInterface | \Psr\Http\Message\ResponseInterface[] | [\Firstred\PostNL\Exception\HttpClientException](#) | [\Firstred\PostNL\Exception\HttpClientException\[\]](#)

Classes

BaseHttpClient

`class Firstred\PostNL\HttpClient\BaseHttpClient`

Summary

Methods

- `public getTimeout()`
- `public setTimeout($seconds)`
- `public getConnectTimeout()`
- `public setConnectTimeout($seconds)`
- `public getVerify()`
- `public setVerify($verify)`
- `public getLogger()`
- `public setLogger($logger)`
- `public getMaxRetries()`
- `public setMaxRetries($maxRetries)`
- `public setConcurrency($concurrency)`
- `public getConcurrency()`
- `public addOrUpdateRequest($id, $request)`
- `public removeRequest($id)`
- `public clearRequests()`
- `public doRequests($requests)`
- `public getRequestFactory()`
- `public setRequestFactory($requestFactory)`
- `public getResponseFactory()`
- `public setResponseFactory($responseFactory)`
- `public getStreamFactory()`
- `public setStreamFactory($streamFactory)`

Constants

`DEFAULT_TIMEOUT = 80`

`DEFAULT_CONNECT_TIMEOUT = 30`

Properties

protected static property Firstred\PostNL\HttpClient\BaseHttpClient::\$timeout

Type int

protected static property Firstred\PostNL\HttpClient\BaseHttpClient::\$connectTimeout

Type int

protected static property Firstred\PostNL\HttpClient\BaseHttpClient::\$verify

Verify the server SSL certificate.

Type bool | string

protected static property Firstred\PostNL\HttpClient\BaseHttpClient::\$pendingRequests

Type array

protected static property Firstred\PostNL\HttpClient\BaseHttpClient::\$logger

Type \Psr\Log\LoggerInterface

protected static property Firstred\PostNL\HttpClient\BaseHttpClient::\$maxRetries

Type int

protected static property Firstred\PostNL\HttpClient\BaseHttpClient::\$concurrency

Type int

protected static property Firstred\PostNL\HttpClient\BaseHttpClient::\$requestFactory

Type \Psr\Http\Message\RequestFactoryInterface | *\Firstred\PostNL\Factory\RequestFactoryInterface*

protected static property Firstred\PostNL\HttpClient\BaseHttpClient::\$responseFactory

Type \Psr\Http\Message\ResponseFactoryInterface | *\Firstred\PostNL\Factory\ResponseFactoryInterface*

protected static property Firstred\PostNL\HttpClient\BaseHttpClient::\$streamFactory

Type \Psr\Http\Message\StreamFactoryInterface | *\Firstred\PostNL\Factory\StreamFactoryInterface*

Methods

public Firstred\PostNL\HttpClient\BaseHttpClient::getTimeout()

Get timeout.

Returns int

public Firstred\PostNL\HttpClient\BaseHttpClient::setTimeout(\$seconds)

Set timeout.

Parameters

- \$seconds (int)

Returns static

```
public Firstred\PostNL\HttpClient\BaseHttpClient::getConnectTimeout()
```

Get connection timeout.

Returns int

```
public Firstred\PostNL\HttpClient\BaseHttpClient::setConnectTimeout($seconds)
```

Set connection timeout.

Parameters

- **\$seconds** (int)

Returns static

```
public Firstred\PostNL\HttpClient\BaseHttpClient::getVerify()
```

Return verify setting.

Returns bool | string

Deprecated

```
public Firstred\PostNL\HttpClient\BaseHttpClient::setVerify($verify)
```

Set the verify setting.

Parameters

- **\$verify** (bool | string)

Returns static

Deprecated

```
public Firstred\PostNL\HttpClient\BaseHttpClient::getLogger()
```

Get logger.

Returns \Psr\Log\LoggerInterface

```
public Firstred\PostNL\HttpClient\BaseHttpClient::setLogger($logger)
```

Set the logger.

Parameters

- **\$logger** (Psr\Log\LoggerInterface)

Returns static

```
public Firstred\PostNL\HttpClient\BaseHttpClient::getMaxRetries()
```

Return max retries.

Returns int

```
public Firstred\PostNL\HttpClient\BaseHttpClient::setMaxRetries($maxRetries)
```

Set the amount of retries.

Parameters

- **\$maxRetries** (int)

Returns static

```
public Firstred\PostNL\HttpClient\BaseHttpClient::setConcurrency($concurrency)
```

Set the concurrency.

Parameters

- **\$concurrency** (int)

Returns static

```
public Firstred\PostNL\HttpClient\BaseHttpClient::getConcurrency()
```

Return concurrency.

Returns int

```
public Firstred\PostNL\HttpClient\BaseHttpClient::addOrUpdateRequest($id, $request)
```

Adds a request to the list of pending requests

Using the ID you can replace a request.

Parameters

- **\$id** (string) Request ID
- **\$request** (Psr\Http\Message\RequestInterface) PSR-7 request

Returns int | string

Throws [*Firstred\PostNL\Exception\InvalidArgumentException*](#)

```
public Firstred\PostNL\HttpClient\BaseHttpClient::removeRequest($id)
```

Remove a request from the list of pending requests.

Parameters

- **\$id** (string)

```
public Firstred\PostNL\HttpClient\BaseHttpClient::clearRequests()
```

Clear all pending requests.

```
public Firstred\PostNL\HttpClient\BaseHttpClient::doRequests( $requests=\[])
```

Do all async requests.

Exceptions are captured into the result array

Parameters

- **\$requests** (Psr\Http\Message\RequestInterface[])

Returns [\Firstred\PostNL\Exception\HttpClientException\[\]](#) | [\Psr\Http\Message\ResponseInterface\[\]](#)

Throws [\Firstred\PostNL\Exception\InvalidArgumentException](#)

public Firstred\PostNL\HttpClient\BaseHttpClient::getRequestFactory()

Get PSR-7 Request factory.

Returns [\Psr\Http\Message\RequestFactoryInterface](#) | [\Firstred\PostNL\Factory\RequestFactoryInterface](#)

Throws [\Firstred\PostNL\Exception\NotSupportedException](#)

Since 1.3.0

public Firstred\PostNL\HttpClient\BaseHttpClient::setRequestFactory(\$requestFactory)

Set PSR-7 Request factory.

Parameters

- **\$requestFactory** ([Psr\Http\Message\RequestFactoryInterface](#) | [\Firstred\PostNL\Factory\RequestFactoryInterface](#))

Returns static

Since 1.3.0

public Firstred\PostNL\HttpClient\BaseHttpClient::getResponseFactory()

Get PSR-7 Response factory.

Returns [\Psr\Http\Message\ResponseFactoryInterface](#) | [\Firstred\PostNL\Factory\ResponseFactoryInterface](#)

Throws [\Firstred\PostNL\Exception\NotSupportedException](#)

Since 1.3.0

public Firstred\PostNL\HttpClient\BaseHttpClient::setResponseFactory(\$responseFactory)

Set PSR-7 Response factory.

Parameters

- **\$responseFactory** ([Psr\Http\Message\ResponseFactoryInterface](#) | [\Firstred\PostNL\Factory\ResponseFactoryInterface](#))

Returns static

Since 1.3.0

public Firstred\PostNL\HttpClient\BaseHttpClient::getStreamFactory()

Set PSR-7 Stream factory.

Returns `\Psr\Http\Message\StreamFactoryInterface` | `\Firstred\PostNL\Factory\StreamFactoryInterface`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Since 1.3.0

```
public Firstred\PostNL\HttpClient\BaseHttpClient::setStreamFactory($streamFactory)
```

Set PSR-7 Stream factory.

Parameters

- **\$streamFactory** (`\Psr\Http\Message\StreamFactoryInterface` | `\Firstred\PostNL\Factory\StreamFactoryInterface`)

Returns static

Since 1.3.0

HTTPPlugClient

```
class Firstred\PostNL\HttpClient\HTTPPlugClient
```

Class HTTPPlugClient.

Parent `Firstred\PostNL\HttpClient\BaseHttpClient`

Implements `Firstred\PostNL\HttpClient\ClientInterface` `Psr\Log\LoggerAwareInterface`

Summary

Methods

- `public __construct($client, $logger, $concurrency, $maxRetries)`
- `public doRequests($requests)`
- `public doRequest($request)`
- `public getClient()`
- `public setClient($client)`
- `public static getInstance($client)`
- `public setVerify($verify)`
- `public getVerify()`

Properties

protected property Firstred\PostNL\HttpClient\HTTPPlugClient::\$instance

Type static

protected static property Firstred\PostNL\HttpClient\HTTPPlugClient::\$client

Type \Http\Client\HttpAsyncClient | \Http\Client\HttpClient

Methods

public Firstred\PostNL\HttpClient\HTTPPlugClient::__construct(*\$client=null, \$logger=null, \$concurrency=5, \$maxRetries=5*)

HTTPPlugClient constructor.

Parameters

- **\$client** (*\Http\Client\HttpAsyncClient | \Http\Client\HttpClient | null*)
- **\$logger** (*\Psr\Log\LoggerInterface | null*)
- **\$concurrency** (*int*)

Throws *\Firstred\PostNL\Exception\HttpClientException*

Since 1.0.0

Since 1.0.0

public Firstred\PostNL\HttpClient\HTTPPlugClient::doRequests(*\$requests=\[]*)

Do all async requests.

Exceptions are captured into the result array

Parameters

- **\$requests** (*\Psr\Http\Message\RequestInterface[]*)

Returns *\Firstred\PostNL\Exception\HttpClientException[]* | *\Psr\Http\Message\ResponseInterface[]*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

public Firstred\PostNL\HttpClient\HTTPPlugClient::doRequest(*\$request*)

Do a single request.

Exceptions are captured into the result array

Parameters

- **\$request** (*\Psr\Http\Message\RequestInterface*)

Returns *\Psr\Http\Message\ResponseInterface*

Throws *\Firstred\PostNL\Exception\HttpClientException*

```
public Firstred\PostNL\HttpClient\HTTPPlugClient::getClient()
```

Returns `\Http\Client\HttpAsyncClient | \Http\Client\HttpClient`

```
public Firstred\PostNL\HttpClient\HTTPPlugClient::setClient($client)
```

Parameters

- **\$client** (`\Http\Client\HttpAsyncClient | \Http\Client\HttpClient`)

Returns `static`

```
public static Firstred\PostNL\HttpClient\HTTPPlugClient::getInstance($client=null)
```

Parameters

- **\$client** (`\Http\Client\HttpAsyncClient | \Http\Client\HttpClient | null`)

Returns `\Firstred\PostNL\HttpClient\HTTPPlugClient`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Deprecated Please instantiate a new client rather than using this singleton

```
public Firstred\PostNL\HttpClient\HTTPPlugClient::setVerify($verify)
```

Parameters

- **\$verify** (`bool | string`)

Returns `\Firstred\PostNL\HttpClient\HTTPPlugClient`

Deprecated

```
public Firstred\PostNL\HttpClient\HTTPPlugClient::getVerify()
```

Returns `bool | string | void`

Deprecated

CurlClient

```
class Firstred\PostNL\HttpClient\CurlClient
```

Class CurlClient.

Parent `Firstred\PostNL\HttpClient\BaseHttpClient`

Implements `Firstred\PostNL\HttpClient\ClientInterface`
`LoggerAwareInterface`

`Psr\Log\`

Summary

Methods

- *public static getInstance()*
- *public doRequest(\$request)*
- *public doRequests(\$requests)*
- *protected prepareRequest(\$curl, \$request)*
- *private handleCurlError(\$url, \$errno, \$message)*

Properties

private property Firstred\PostNL\HttpClient\CurlClient::\$instance

Type static

protected static property Firstred\PostNL\HttpClient\CurlClient::\$defaultOptions

Type array | callable | null

Methods

public static Firstred\PostNL\HttpClient\CurlClient::getInstance()

CurlClient Singleton.

Returns *\Firstred\PostNL\HttpClient\CurlClient*

Deprecated Please instantiate a new client rather than using this singleton

public Firstred\PostNL\HttpClient\CurlClient::doRequest(\$request)

Do a single request.

Exceptions are captured into the result array

Parameters

- **\$request** (Psr\Http\Message\RequestInterface)

Returns *\Psr\Http\Message\ResponseInterface*

Throws *\Firstred\PostNL\Exception\HttpClientException*

public Firstred\PostNL\HttpClient\CurlClient::doRequests(\$requests=\|/)

Do all async requests.

Exceptions are captured into the result array

Parameters

- **\$requests** (Psr\Http\Message\RequestInterface[])

Returns `\Psr\Http\Message\ResponseInterface[]` | `\Firstred\PostNL\Exception\HttpClientException[]`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

protected `Firstred\PostNL\HttpClient\CurlClient::prepareRequest($curl, $request)`

Parameters

- `$curl` (resource)
- `$request` (`\Psr\Http\Message\RequestInterface`)

Throws `\Firstred\PostNL\Exception\HttpClientException`

private `Firstred\PostNL\HttpClient\CurlClient::handleCurlError($url, $errno, $message)`

Parameters

- `$url`
- `$errno` (`Firstred\PostNL\HttpClient\number`)
- `$message` (string)

Throws `\Firstred\PostNL\Exception\ApiConnectionException`

SymfonyHttpClient

class `Firstred\PostNL\HttpClient\SymfonyHttpClient`

Class `SymfonyHttpClientInterface`.

Parent `Firstred\PostNL\HttpClient\BaseHttpClient`

Implements `Firstred\PostNL\HttpClient\ClientInterface` `Psr\Log\LoggerAwareInterface`

Summary

Methods

- `public __construct($client, $logger, $concurrency, $maxRetries)`
- `private getClient()`
- `public static getInstance()`
- `public setOption($name, $value)`
- `public getOption($name)`
- `public doRequest($request)`
- `public doRequests($requests)`
- `public setMaxRetries($maxRetries)`
- `public setConcurrency($concurrency)`
- `private convertPsrRequestToSymfonyHttpClientRequestParams($psrRequest)`
- `private convertSymfonyHttpClientResponseToPsrResponse($symfonyHttpClientResponse)`

Constants

DEFAULT_TIMEOUT = 60

DEFAULT_CONNECT_TIMEOUT = 20

Properties

protected property Firstred\PostNL\HttpClient\SymfonyHttpClient::\$instance

Type static

protected static property

Firstred\PostNL\HttpClient\SymfonyHttpClient::\$defaultOptions

Type array

private static property Firstred\PostNL\HttpClient\SymfonyHttpClient::\$client

Type \Symfony\Contracts\HttpClient\HttpClientInterface

Methods

public Firstred\PostNL\HttpClient\SymfonyHttpClient::__construct(*\$client=null*, *\$logger=null*,
\$concurrency=5,
\$maxRetries=5)

SymfonyHttpClient constructor.

Parameters

- **\$client** (Symfony\Contracts\HttpClient\HttpClientInterface | null)
- **\$logger** (Psr\Log\LoggerInterface | null)
- **\$concurrency** (int)
- **\$maxRetries** (int)

Since 1.3.0 Custom constructor

private Firstred\PostNL\HttpClient\SymfonyHttpClient::getClient()

Get the Symfony HTTP Client.

Returns \Symfony\Contracts\HttpClient\HttpClientInterface

public static Firstred\PostNL\HttpClient\SymfonyHttpClient::getInstance()

Returns static

Deprecated Please instantiate a new client rather than using this singleton

public Firstred\PostNL\HttpClient\SymfonyHttpClient::setOption(*\$name*, *\$value*)

Set Symfony HTTP Client option.

Parameters

- **\$name** (string)

- **\$value** (mixed)

Returns static

public Firstred\PostNL\HttpClient\SymfonyHttpClient::getOption(*\$name*)

Get Symfony HTTP Client option.

Parameters

- **\$name** (string)

Returns mixed | null

public Firstred\PostNL\HttpClient\SymfonyHttpClient::doRequest(*\$request*)

Do a single request.

Exceptions are captured into the result array

Parameters

- **\$request** (Psr\Http\Message\RequestInterface)

Returns \Psr\Http\Message\ResponseInterface

Throws [\Firstred\PostNL\Exception\HttpClientException](#)

public Firstred\PostNL\HttpClient\SymfonyHttpClient::doRequests(*\$requests*=\|/)

Do all async requests.

Exceptions are captured into the result array

Parameters

- **\$requests** (Psr\Http\Message\RequestInterface[])

Returns [\Firstred\PostNL\Exception\HttpClientException\[\]](#) | \Psr\Http\Message\ResponseInterface[]

Throws [\Firstred\PostNL\Exception\InvalidArgumentException](#)

public Firstred\PostNL\HttpClient\SymfonyHttpClient::setMaxRetries(*\$maxRetries*)

Set the amount of retries.

Parameters

- **\$maxRetries** (int)

Returns static

public Firstred\PostNL\HttpClient\SymfonyHttpClient::setConcurrency(*\$concurrency*)

Set the concurrency.

Parameters

- **\$concurrency** (int)

Returns static

private Firstred\PostNL\HttpClient\SymfonyHttpClient::convertPsrRequestToSymfonyHttpClientRequestPar

Parameters

- **\$psrRequest** (Psr\Http\Message\RequestInterface)

Returns array

Since 1.3.0

private Firstred\PostNL\HttpClient\SymfonyHttpClient::convertSymfonyHttpClientResponseToPsrResponse(

Parameters

- **\$symfonyHttpClientResponse** (Symfony\Contracts\HttpClient\ResponseInterface)

Returns \Psr\Http\Message\ResponseInterface

Throws \Symfony\Contracts\HttpClient\Exception\TransportExceptionInterface

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws \Symfony\Contracts\HttpClient\Exception\ClientExceptionInterface

Throws \Symfony\Contracts\HttpClient\Exception\RedirectExceptionInterface

Throws \Symfony\Contracts\HttpClient\Exception\ServerExceptionInterface

Throws \Symfony\Contracts\HttpClient\Exception\TransportExceptionInterface

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws \Symfony\Contracts\HttpClient\Exception\ClientExceptionInterface

Throws \Symfony\Contracts\HttpClient\Exception\RedirectExceptionInterface

Throws \Symfony\Contracts\HttpClient\Exception\ServerExceptionInterface

Throws \Symfony\Contracts\HttpClient\Exception\TransportExceptionInterface

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws \Symfony\Contracts\HttpClient\Exception\ClientExceptionInterface

Throws \Symfony\Contracts\HttpClient\Exception\RedirectExceptionInterface

Throws \Symfony\Contracts\HttpClient\Exception\ServerExceptionInterface

Throws \Symfony\Contracts\HttpClient\Exception\TransportExceptionInterface

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws \Symfony\Contracts\HttpClient\Exception\ClientExceptionInterface

Throws \Symfony\Contracts\HttpClient\Exception\RedirectExceptionInterface

Throws \Symfony\Contracts\HttpClient\Exception\ServerExceptionInterface

Throws \Symfony\Contracts\HttpClient\Exception\TransportExceptionInterface

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws \Symfony\Contracts\HttpClient\Exception\ClientExceptionInterface

Throws \Symfony\Contracts\HttpClient\Exception\RedirectExceptionInterface

Throws \Symfony\Contracts\HttpClient\Exception\ServerExceptionInterface

Since 1.3.0

MockClient

class Firstred\PostNL\HttpClient\MockClient

Class MockClient.

Parent *Firstred\PostNL\HttpClient\BaseHttpClient*

Implements *Firstred\PostNL\HttpClient\ClientInterface* Psr\Log\
LoggerAwareInterface

Summary

Methods

- *public static getInstance()*
- *public setOption(\$name, \$value)*
- *public getOption(\$name)*
- *public setHandler(\$handler)*
- *public getHandler()*
- *public doRequest(\$request)*
- *public doRequests(\$requests)*

Constants

DEFAULT_TIMEOUT = 60

DEFAULT_CONNECT_TIMEOUT = 20

Properties

protected property Firstred\PostNL\HttpClient\MockClient::\$instance

Type static

protected static property Firstred\PostNL\HttpClient\MockClient::\$defaultOptions

Type array

private static property Firstred\PostNL\HttpClient\MockClient::\$handler

Type \GuzzleHttp\HandlerStack

Methods

public static Firstred\PostNL\HttpClient\MockClient::getInstance()

Returns *\Firstred\PostNL\HttpClient\MockClient* | static

Deprecated Please instantiate a new client rather than using this singleton

public Firstred\PostNL\HttpClient\MockClient::setOption(\$name, \$value)

Set Guzzle option.

Parameters

- **\$name** (string)
- **\$value** (mixed)

Returns *\Firstred\PostNL\HttpClient\MockClient*

```
public Firstred\PostNL\HttpClient\MockClient::getOption($name)
```

Get Guzzle option.

Parameters

- **\$name** (string)

Returns mixed | null

```
public Firstred\PostNL\HttpClient\MockClient::setHandler($handler)
```

Returns *\Firstred\PostNL\HttpClient\MockClient*

```
public Firstred\PostNL\HttpClient\MockClient::getHandler()
```

Returns \GuzzleHttp\HandlerStack

```
public Firstred\PostNL\HttpClient\MockClient::doRequest($request)
```

Do a single request.

Exceptions are captured into the result array

Parameters

- **\$request** (Psr\Http\Message\RequestInterface)

Returns \Psr\Http\Message\ResponseInterface

Throws *\Firstred\PostNL\Exception\HttpClientException*

```
public Firstred\PostNL\HttpClient\MockClient::doRequests( $requests=\\)
```

Do all async requests.

Exceptions are captured into the result array

Parameters

- **\$requests** (Psr\Http\Message\RequestInterface[])

Returns \Psr\Http\Message\ResponseInterface[] | *\Firstred\PostNL\Exception\HttpClientException[]*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

GuzzleClient

class Firstred\PostNL\HttpClient\GuzzleClient

Class GuzzleClient.

Parent *Firstred\PostNL\HttpClient\BaseHttpClient*

Implements *Firstred\PostNL\HttpClient\ClientInterface* Psr\Log\
LoggerAwareInterface

Summary

Methods

- *public __construct(\$client, \$logger, \$concurrency, \$maxRetries)*
- *private setClient(\$client)*
- *private getClient()*
- *public static getInstance()*
- *public setOption(\$name, \$value)*
- *public getOption(\$name)*
- *public doRequest(\$request)*
- *public doRequests(\$requests)*

Constants

DEFAULT_TIMEOUT = 60

DEFAULT_CONNECT_TIMEOUT = 20

Properties

protected property Firstred\PostNL\HttpClient\GuzzleClient::\$instance

Type static

protected static property Firstred\PostNL\HttpClient\GuzzleClient::\$defaultOptions

Type array

private static property Firstred\PostNL\HttpClient\GuzzleClient::\$client

Type \GuzzleHttp\Client

Methods

```
public Firstred\PostNL\HttpClient\GuzzleClient::__construct($client=null, $logger=null,  
                                                         $concurrency=5,  
                                                         $maxRetries=5)
```

GuzzleClient constructor.

Parameters

- ***\$client*** (GuzzleHttp\Client | null)
- ***\$logger*** (Psr\Log\LoggerInterface | null)
- ***\$concurrency*** (int)
- ***\$maxRetries*** (int)

Since 1.3.0 Custom constructor

```
private Firstred\PostNL\HttpClient\GuzzleClient::setClient($client)  
private Firstred\PostNL\HttpClient\GuzzleClient::getClient()
```

Get the Guzzle client.

Returns \GuzzleHttp\Client

```
public static Firstred\PostNL\HttpClient\GuzzleClient::getInstance()
```

Returns [\Firstred\PostNL\HttpClient\GuzzleClient](#) | static

Deprecated Please instantiate a new client rather than using this singleton

```
public Firstred\PostNL\HttpClient\GuzzleClient::setOption($name, $value)
```

Set Guzzle option.

Parameters

- ***\$name*** (string)
- ***\$value*** (mixed)

Returns [\Firstred\PostNL\HttpClient\GuzzleClient](#)

```
public Firstred\PostNL\HttpClient\GuzzleClient::getOption($name)
```

Get Guzzle option.

Parameters

- ***\$name*** (string)

Returns mixed | null

```
public Firstred\PostNL\HttpClient\GuzzleClient::doRequest($request)
```

Do a single request.

Exceptions are captured into the result array

Parameters

- **\$request** (Psr\Http\Message\RequestInterface)

Returns \Psr\Http\Message\ResponseInterface

Throws *\Firstred\PostNL\Exception\HttpClientException*

```
public Firstred\PostNL\HttpClient\GuzzleClient::doRequests( $requests=[])
```

Do all async requests.

Exceptions are captured into the result array

Parameters

- **\$requests** (Psr\Http\Message\RequestInterface[])

Returns *\Firstred\PostNL\Exception\HttpClientException[]* | \Psr\Http\Message\ResponseInterface[]

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Service

\Firstred\PostNL\Service

Interfaces**TimeframeServiceInterface**

```
interface Firstred\PostNL\Service\TimeframeServiceInterface
```

Class TimeframeService.

Parent *Firstred\PostNL\Service\ServiceInterface*

Summary**Methods**

- *public getTimeframesREST(\$getTimeframes)*
- *public getTimeframesSOAP(\$getTimeframes)*
- *public buildGetTimeframesRequestREST(\$getTimeframes)*
- *public processGetTimeframesResponseREST(\$response)*
- *public buildGetTimeframesRequestSOAP(\$getTimeframes)*
- *public processGetTimeframesResponseSOAP(\$response)*

Methods

public Firstred\PostNL\Service\TimeframeServiceInterface::getTimeframesREST(*\$getTimeframes*)

Get timeframes via REST.

Parameters

- **\$getTimeframes** (*Firstred\PostNL\Entity\Request\GetTimeframes*)

Returns *\Firstred\PostNL\Entity\Response\ResponseTimeframes*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\NotFoundException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\NotFoundException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\NotFoundException*
Since 1.0.0
Deprecated 1.4.0 Use ``getTimeframes`` instead

public Firstred\PostNL\Service\TimeframeServiceInterface::getTimeframesSOAP(*\$getTimeframes*)

Get timeframes via SOAP.

Parameters

- **\$getTimeframes** (*Firstred\PostNL\Entity\Request\GetTimeframes*)

Returns *\Firstred\PostNL\Entity\Response\ResponseTimeframes*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\NotFoundException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\NotFoundException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Since 1.0.0
Deprecated 1.4.0 Use ``getTimeframes`` instead

public `Firstred\PostNL\Service\TimeframeServiceInterface::buildGetTimeframesRequestREST($getTimeframes)`

Build the GetTimeframes request for the REST API.

Parameters

- **\$getTimeframes** (`Firstred\PostNL\Entity\Request\GetTimeframes`)

Returns `\Psr\Http\Message\RequestInterface`

Since 1.0.0

Deprecated 1.4.0

public `Firstred\PostNL\Service\TimeframeServiceInterface::processGetTimeframesResponseREST($response)`

Process GetTimeframes Response REST.

Parameters

- **\$response** (mixed)

Returns `\Firstred\PostNL\Entity\Response\ResponseTimeframes` | null

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Since 1.0.0

Deprecated 1.4.0

public `Firstred\PostNL\Service\TimeframeServiceInterface::buildGetTimeframesRequestSOAP($getTimeframes)`

Build the GetTimeframes request for the SOAP API.

Parameters

- `$getTimeframes` (`Firstred\PostNL\Entity\Request\GetTimeframes`)

Returns `\Psr\Http\Message\RequestInterface`

Since 1.0.0

Deprecated 1.4.0

public `Firstred\PostNL\Service\TimeframeServiceInterface::processGetTimeframesResponseSOAP($response)`

Process GetTimeframes Response SOAP.

Parameters

- `$response` (`\Psr\Http\Message\ResponseInterface`)

Returns `\Firstred\PostNL\Entity\Response\ResponseTimeframes`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Since 1.0.0

Deprecated 1.4.0

ConfirmingServiceInterface

interface Firstred\PostNL\Service\ConfirmingServiceInterface

Class ConfirmingService.

Parent *Firstred\PostNL\Service\ServiceInterface*

Summary

Methods

- *public confirmShipmentREST(\$confirming)*
- *public confirmShipmentsREST(\$confirms)*
- *public confirmShipmentSOAP(\$confirming)*
- *public confirmShipmentsSOAP(\$confirmings)*
- *public buildConfirmRequestREST(\$confirming)*
- *public processConfirmResponseREST(\$response)*
- *public buildConfirmRequestSOAP(\$confirming)*
- *public processConfirmResponseSOAP(\$response)*

Methods

public Firstred\PostNL\Service\ConfirmingServiceInterface::confirmShipmentREST(*\$confirming*)

Generate a single barcode via REST.

Parameters

- **\$confirming** (*Firstred\PostNL\Entity\Request\Confirming*)

Returns *\Firstred\PostNL\Entity\Response\ConfirmingResponseShipment*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Since 1.0.0

Deprecated 1.4.0 Use ``confirmShipment``

public Firstred\PostNL\Service\ConfirmingServiceInterface::confirmShipmentsREST(*\$confirms*)

Confirm multiple shipments.

Parameters

- *\$confirms* (*Firstred\PostNL\Entity\Request\Confirming[]*) ['uuid' => Confirming, ...]

Returns *\Firstred\PostNL\Entity\Response\ConfirmingResponseShipment[]*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Since 1.0.0

Deprecated 1.4.0 Used `\confirmShipments``

public *Firstred\PostNL\Service\ConfirmingServiceInterface::confirmShipmentSOAP(\$confirming)*

Generate a single label via SOAP.

Parameters

- **\$confirming** (*Firstred\PostNL\Entity\Request\Confirming*)

Returns *\Firstred\PostNL\Entity\Response\ConfirmingResponseShipment*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Since 1.0.0

Deprecated 1.4.0 use `\confirmShipment``

public *Firstred\PostNL\Service\ConfirmingServiceInterface::confirmShipmentsSOAP(\$confirmings)*

Generate multiple labels at once.

Parameters

- **\$confirmings** (array) [`'uuid' => Confirming, ...`]

Returns *\Firstred\PostNL\Entity\Response\ConfirmingResponseShipment[]*

Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Since 1.0.0
Deprecated 1.4.0 Use ``confirmShipments``

public `Firstred\PostNL\Service\ConfirmingServiceInterface::buildConfirmRequestREST($confirming)`

Parameters

- `$confirming` (`Firstred\PostNL\Entity\Request\Confirming`)

Returns `\Psr\Http\Message\RequestInterface`

Since 1.0.0

Deprecated 1.4.0

public `Firstred\PostNL\Service\ConfirmingServiceInterface::processConfirmResponseREST($response)`

Proces Confirm REST Response.

Parameters

- `$response` (mixed)

Returns `\Firstred\PostNL\Entity\Response\ConfirmingResponseShipment` | null

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Since 1.0.0
Deprecated 1.4.0

public Firstred\PostNL\Service\ConfirmingServiceInterface::buildConfirmRequestSOAP(*\$confirming*)

Parameters

- **\$confirming** (*Firstred\PostNL\Entity\Request\Confirming*)

Returns *\Psr\Http\Message\RequestInterface*

Since 1.0.0

Deprecated 1.4.0

public Firstred\PostNL\Service\ConfirmingServiceInterface::processConfirmResponseSOAP(*\$response*)

Process Confirm SOAP response.

Parameters

- **\$response** (Psr\Http\Message\ResponseInterface)

Returns *\Firstred\PostNL\Entity\Response\ConfirmingResponseShipment*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Since 1.0.0

Deprecated 1.4.0

LabellingServiceInterface

interface *Firstred\PostNL\Service\LabellingServiceInterface*

Class LabellingService.

Parent *Firstred\PostNL\Service\ServiceInterface*

Summary

Methods

- *public generateLabelREST(\$generateLabel, \$confirm)*
- *public generateLabelsREST(\$generateLabels)*
- *public generateLabelSOAP(\$generateLabel, \$confirm)*
- *public generateLabelsSOAP(\$generateLabels)*
- *public buildGenerateLabelRequestREST(\$generateLabel, \$confirm)*
- *public processGenerateLabelResponseREST(\$response)*

- `public buildGenerateLabelRequestSOAP($generateLabel, $confirm)`
- `public processGenerateLabelResponseSOAP($response)`

Methods

public Firstred\PostNL\Service\LabellingServiceInterface::**generateLabelREST**(*\$generateLabel*,
\$confirm=true)

Generate a single barcode via REST.

Parameters

- **\$generateLabel** (*Firstred\PostNL\Entity\Request\GenerateLabel*)
- **\$confirm** (bool)

Returns *\Firstred\PostNL\Entity\Response\GenerateLabelResponse*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Since 1.0.0

Deprecated 1.4.0 Use `\generateLabels` instead

public `Firstred\PostNL\Service\LabellingServiceInterface::generateLabelsREST($generateLabels)`

Generate multiple labels at once.

Parameters

- `$generateLabels` (array) [`'uuid'` => [`GenerateBarcode`, `confirm`], ...]

Returns array

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Since 1.0.0

Deprecated 1.4.0 Use ``generateLabels`` instead

```
public Firstred\PostNL\Service\LabellingServiceInterface::generateLabelSOAP($generateLabel,  
                                                                            $con-  
                                                                            firm=true)
```

Generate a single label via SOAP.

Parameters

- **\$generateLabel** (`Firstred\PostNL\Entity\Request\GenerateLabel`)
- **\$confirm** (bool)

Returns `\Firstred\PostNL\Entity\Response\GenerateLabelResponse`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Since 1.0.0

Deprecated 1.4.0 Use ``generateLabels``

```
public Firstred\PostNL\Service\LabellingServiceInterface::generateLabelsSOAP($generateLabels)
```

Generate multiple labels at once via SOAP.

Parameters

- **\$generateLabels** (array) ['uuid' => [GenerateBarcode, confirm], ...]

Returns array

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Since 1.0.0

Deprecated 1.4.0 Use ``generateLabels`` instead

```
public Firstred\PostNL\Service\LabellingServiceInterface::buildGenerateLabelRequestREST($generateLabel,  
                                                                                       $confirm,  
                                                                                       $confirm=true)
```

Build the GenerateLabel request for the REST API.

Parameters

- **\$generateLabel** (*Firstred\PostNL\Entity\Request\GenerateLabel*)
- **\$confirm** (bool)

Returns *\Psr\Http\Message\RequestInterface*

Since 1.0.0

```
public Firstred\PostNL\Service\LabellingServiceInterface::processGenerateLabelResponseREST($response)
```

Process the GenerateLabel REST Response.

Parameters

- **\$response** (*\Psr\Http\Message\ResponseInterface*)

Returns *\Firstred\PostNL\Entity\Response\GenerateLabelResponse* | null

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Since 1.0.0
Deprecated 1.4.0

```
public Firstred\PostNL\Service\LabellingServiceInterface::buildGenerateLabelRequestSOAP($generateLabel,  
                                                                                      $confirm=  
                                                                                      false)
```

Build the GenerateLabel request for the SOAP API.

Parameters

- **\$generateLabel** (`Firstred\PostNL\Entity\Request\GenerateLabel`)
- **\$confirm** (bool)

Returns `\Psr\Http\Message\RequestInterface`

Since 1.0.0

Deprecated 1.4.0

```
public Firstred\PostNL\Service\LabellingServiceInterface::processGenerateLabelResponseSOAP($response)
```

Parameters

- **\$response** (`\Psr\Http\Message\ResponseInterface`)

Returns `\Firstred\PostNL\Entity\Response\GenerateLabelResponse`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Since 1.0.0
Deprecated 1.4.0

DeliveryDateServiceInterface

interface `Firstred\PostNL\Service\DeliveryDateServiceInterface`

Class DeliveryDateService.

Parent `Firstred\PostNL\Service\ServiceInterface`

Summary

Methods

- `public getDeliveryDateREST($getDeliveryDate)`
- `public getDeliveryDateSOAP($getDeliveryDate)`
- `public getSentDateREST($getSentDate)`
- `public getSentDateSOAP($getSentDate)`
- `public buildGetDeliveryDateRequestREST($getDeliveryDate)`
- `public processGetDeliveryDateResponseREST($response)`
- `public buildGetDeliveryDateRequestSOAP($getDeliveryDate)`
- `public processGetDeliveryDateResponseSOAP($response)`
- `public buildGetSentDateRequestREST($getSentDate)`
- `public processGetSentDateResponseREST($response)`
- `public buildGetSentDateRequestSOAP($getSentDate)`
- `public processGetSentDateResponseSOAP($response)`

Methods

public Firstred\PostNL\Service\DeliveryDateServiceInterface::getDeliveryDateREST(*\$getDeliveryDate*)

Get a delivery date via REST.

Parameters

- **\$getDeliveryDate** (*Firstred\PostNL\Entity\Request\GetDeliveryDate*)

Returns *\Firstred\PostNL\Entity\Response\GetDeliveryDateResponse*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Since 1.0.0

Deprecated 1.4.0 Use ``getDeliveryDate`` instead

public *Firstred\PostNL\Service\DeliveryDateServiceInterface::getDeliveryDateSOAP(\$getDeliveryDate)*

Get a delivery date via SOAP.

Parameters

- **\$getDeliveryDate** (*Firstred\PostNL\Entity\Request\GetDeliveryDate*)

Returns *\Firstred\PostNL\Entity\Response\GetDeliveryDateResponse*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Since 1.0.0

Deprecated 1.4.0 Use ``getDeliveryDate`` instead

public Firstred\PostNL\Service\DeliveryDateServiceInterface::getSentDateREST(*\$getSentDate*)

Get the sent date via REST.

Parameters

- **\$getSentDate** (*Firstred\PostNL\Entity\Request\GetSentDateRequest*)

Returns *\Firstred\PostNL\Entity\Response\GetSentDateResponse*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\NotFoundException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\NotFoundException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\NotFoundException*
Since 1.0.0
Deprecated 1.4.0 Use ``getSentDate`` instead

public *Firstred\PostNL\Service\DeliveryDateServiceInterface::getSentDateSOAP(\$getSentDate)*

Generate a single label via SOAP.

Parameters

- **\$getSentDate** (*Firstred\PostNL\Entity\Request\GetSentDateRequest*)

Returns *\Firstred\PostNL\Entity\Response\GetSentDateResponse*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotFoundException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotFoundException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Since 1.0.0

Deprecated 1.4.0

public `Firstred\PostNL\Service\DeliveryDateServiceInterface::buildGetDeliveryDateRequestREST($getDeliv`

Build the GetDeliveryDate request for the REST API.

Parameters

- **\$getDeliveryDate** (`Firstred\PostNL\Entity\Request\GetDeliveryDate`)

Returns `\Psr\Http\Message\RequestInterface`

Since 1.0.0

Deprecated 1.4.0

public `Firstred\PostNL\Service\DeliveryDateServiceInterface::processGetDeliveryDateResponseREST($resp`

Process GetDeliveryDate REST Response.

Parameters

- **\$response** (mixed)

Returns `\Firstred\PostNL\Entity\Response\GetDeliveryDateResponse | null`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Since 1.0.0

Deprecated 1.4.0

```
public Firstred\PostNL\Service\DeliveryDateServiceInterface::buildGetDeliveryDateRequestSOAP($getDeliv
```

Build the GetDeliveryDate request for the SOAP API.

Parameters

- **\$getDeliveryDate** (*Firstred\PostNL\Entity\Request\GetDeliveryDate*)

Returns \Psr\Http\Message\RequestInterface

Since 1.0.0

Deprecated 1.4.0

```
public Firstred\PostNL\Service\DeliveryDateServiceInterface::processGetDeliveryDateResponseSOAP($resp
```

Parameters

- **\$response** (*Psr\Http\Message\ResponseInterface*)

Returns *\Firstred\PostNL\Entity\Response\GetDeliveryDateResponse*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Since 1.0.0

Deprecated 1.4.0

```
public Firstred\PostNL\Service\DeliveryDateServiceInterface::buildGetSentDateRequestREST($getSentDate)
```

Build the GetSentDate request for the REST API.

Parameters

- **\$getSentDate** (*Firstred\PostNL\Entity\Request\GetSentDateRequest*)

Returns \Psr\Http\Message\RequestInterface

Since 1.0.0

Deprecated 1.4.0

```
public Firstred\PostNL\Service\DeliveryDateServiceInterface::processGetSentDateResponseREST($response)
```

Process GetSentDate REST Response.

Parameters

- ***\$response*** (mixed)

Returns `\Firstred\PostNL\Entity\Response\GetSentDateResponse` | null

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Since 1.0.0

Deprecated 1.4.0

```
public Firstred\PostNL\Service\DeliveryDateServiceInterface::buildGetSentDateRequestSOAP($getSentDate)
```

Build the GetSentDate request for the SOAP API.

Parameters

- ***\$getSentDate*** (`\Firstred\PostNL\Entity\Request\GetSentDateRequest`)

Returns `\Psr\Http\Message\RequestInterface`

Since 1.0.0

Deprecated 1.4.0

```
public Firstred\PostNL\Service\DeliveryDateServiceInterface::processGetSentDateResponseSOAP($response)
```

Process GetSentDate SOAP Response.

Parameters

- ***\$response*** (`\Psr\Http\Message\ResponseInterface`)

Returns `\Firstred\PostNL\Entity\Response\GetSentDateResponse`

Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Since 1.0.0
Deprecated 1.4.0

LocationServiceInterface

interface *Firstred\PostNL\Service\LocationServiceInterface*

Class LocationService.

Parent *Firstred\PostNL\Service\ServiceInterface*

Summary

Methods

- *public getNearestLocationsREST(\$getNearestLocations)*
- *public getNearestLocationsSOAP(\$getNearestLocations)*
- *public getLocationsInAreaREST(\$getLocations)*
- *public getLocationsInAreaSOAP(\$getNearestLocations)*
- *public getLocationREST(\$getLocation)*
- *public getLocationSOAP(\$getLocation)*
- *public buildGetNearestLocationsRequestREST(\$getNearestLocations)*
- *public processGetNearestLocationsResponseREST(\$response)*
- *public buildGetNearestLocationsRequestSOAP(\$getLocations)*
- *public processGetNearestLocationsResponseSOAP(\$response)*
- *public buildGetLocationsInAreaRequestREST(\$getLocations)*

- `public processGetLocationsInAreaResponseREST($response)`
- `public buildGetLocationsInAreaRequestSOAP($getLocations)`
- `public processGetLocationsInAreaResponseSOAP($response)`
- `public buildGetLocationRequestREST($getLocation)`
- `public processGetLocationResponseREST($response)`
- `public buildGetLocationRequestSOAP($getLocations)`
- `public processGetLocationResponseSOAP($response)`

Methods

public Firstred\PostNL\Service\LocationServiceInterface::getNearestLocationsREST(*\$getNearestLocations*)

Get the nearest locations via REST.

Parameters

- **\$getNearestLocations** (*Firstred\PostNL\Entity\Request\GetNearestLocations*)

Returns *\Firstred\PostNL\Entity\Response\GetNearestLocationsResponse*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Since 1.0.0
Deprecated 1.4.0 Use ``getNearestLocations`` instead

public `Firstred\PostNL\Service\LocationServiceInterface::getNearestLocationsSOAP($getNearestLocations)`

Get the nearest locations via SOAP.

Parameters

- **\$getNearestLocations** (`Firstred\PostNL\Entity\Request\GetNearestLocations`)

Returns `\Firstred\PostNL\Entity\Response\GetNearestLocationsResponse`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Since 1.0.0
Deprecated 1.4.0 Use ``getNearestLocations`` instead

public `Firstred\PostNL\Service\LocationServiceInterface::getLocationsInAreaREST($getLocations)`

Get the nearest locations via REST.

Parameters

- **\$getLocations** (`Firstred\PostNL\Entity\Request\GetLocationsInArea`)

Returns `\Firstred\PostNL\Entity\Response\GetLocationsInAreaResponse`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Since 1.0.0

Deprecated 1.4.0 Use ``getLocationsInArea`` instead

```
public Firstred\PostNL\Service\LocationServiceInterface::getLocationsInAreaSOAP($getNearestLocations)
```

Get the nearest locations via SOAP.

Parameters

- **`$getNearestLocations`** (*Firstred\PostNL\Entity\Request\GetLocationsInArea*)

Returns *\Firstred\PostNL\Entity\Response\GetLocationsInAreaResponse*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Since 1.0.0

Deprecated 1.4.0 Use ``getLocationsInArea`` instead

```
public Firstred\PostNL\Service\LocationServiceInterface::getLocationREST($getLocation)
```

Get the location via REST.

Parameters

- **\$getLocation** (*Firstred\PostNL\Entity\Request\GetLocation*)

Returns *\Firstred\PostNL\Entity\Response\GetLocationsInAreaResponse*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotFoundException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotFoundException*
Since 1.0.0
Deprecated 1.4.0 Use ``getLocation`` instead

public *Firstred\PostNL\Service\LocationServiceInterface::getLocationSOAP(\$getLocation)*

Get the nearest locations via SOAP.

Parameters

- **\$getLocation** (*Firstred\PostNL\Entity\Request\GetLocation*)

Returns *\Firstred\PostNL\Entity\Response\GetLocationsInAreaResponse*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotFoundException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotFoundException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotFoundException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Since 1.0.0

Deprecated 1.4.0 Use ``getLocation`` instead

public *Firstred\PostNL\Service\LocationServiceInterface::buildGetNearestLocationsRequestREST(\$getNear*

Build the GenerateLabel request for the REST API.

Parameters

- **\$getNearestLocations** (*Firstred\PostNL\Entity\Request\GetNearestLocations*)

Returns *\Psr\Http\Message\RequestInterface*

Since 1.0.0

Deprecated 1.4.0

public *Firstred\PostNL\Service\LocationServiceInterface::processGetNearestLocationsResponseREST(\$resp*

Process GetNearestLocations Response REST.

Parameters

- **\$response** (mixed)

Returns *\Firstred\PostNL\Entity\Response\GetNearestLocationsResponse | null*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Since 1.0.0

Deprecated 1.4.0

public Firstred\PostNL\Service\LocationServiceInterface::buildGetNearestLocationsRequestSOAP(*\$getLocation*

Build the GenerateLabel request for the SOAP API.

Parameters

- **\$getLocations** (*Firstred\PostNL\Entity\Request\GetNearestLocations*)

Returns *\Psr\Http\Message\RequestInterface*

Since 1.0.0

Deprecated 1.4.0

public Firstred\PostNL\Service\LocationServiceInterface::processGetNearestLocationsResponseSOAP(*\$response*

Process GetNearestLocations Response SOAP.

Parameters

- **\$response** (*\Psr\Http\Message\ResponseInterface*)

Returns *\Firstred\PostNL\Entity\Response\GetNearestLocationsResponse*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Since 1.0.0

Deprecated 1.4.0

public Firstred\PostNL\Service\LocationServiceInterface::buildGetLocationsInAreaRequestREST(*\$getLocation*

Build the GetLocationsInArea request for the REST API.

Parameters

- **\$getLocations** (*Firstred\PostNL\Entity\Request\GetLocationsInArea*)

Returns \Psr\Http\Message\RequestInterface

Since 1.0.0

Deprecated 1.4.0

public Firstred\PostNL\Service\LocationServiceInterface::processGetLocationsInAreaResponseREST(*\$response*)

Process GetLocationsInArea Response REST.

Parameters

- **\$response** (mixed)

Returns *\Firstred\PostNL\Entity\Response\GetLocationsInAreaResponse* | null

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Since 1.0.0

Deprecated 1.4.0

public Firstred\PostNL\Service\LocationServiceInterface::buildGetLocationsInAreaRequestSOAP(*\$getLocationsInAreaRequest*)

Build the GetLocationsInArea request for the SOAP API.

Parameters

- **\$getLocations** (*Firstred\PostNL\Entity\Request\GetLocationsInArea*)

Returns \Psr\Http\Message\RequestInterface

Since 1.0.0

Deprecated 1.4.0

public Firstred\PostNL\Service\LocationServiceInterface::processGetLocationsInAreaResponseSOAP(*\$response*)

Parameters

- **\$response** (Psr\Http\Message\ResponseInterface)

Returns \Firstred\PostNL\Entity\Response\GetLocationsInAreaResponse

Throws \Firstred\PostNL\Exception\CifDownException

Throws \Firstred\PostNL\Exception\CifException

Throws \Firstred\PostNL\Exception\ResponseException

Throws \Firstred\PostNL\Exception\HttpClientException

Throws \Firstred\PostNL\Exception\CifDownException

Throws \Firstred\PostNL\Exception\CifException

Throws \Firstred\PostNL\Exception\ResponseException

Throws \Firstred\PostNL\Exception\HttpClientException

Throws \Firstred\PostNL\Exception\CifDownException

Throws \Firstred\PostNL\Exception\CifException

Throws \Firstred\PostNL\Exception\ResponseException

Throws \Firstred\PostNL\Exception\HttpClientException

Throws \Firstred\PostNL\Exception\CifDownException

Throws \Firstred\PostNL\Exception\CifException

Throws \Firstred\PostNL\Exception\ResponseException

Throws \Firstred\PostNL\Exception\HttpClientException

Since 1.0.0

Deprecated 1.4.0

public Firstred\PostNL\Service\LocationServiceInterface::buildGetLocationRequestREST(*\$getLocation*)

Build the GetLocation request for the REST API.

Parameters

- **\$getLocation** (Firstred\PostNL\Entity\Request\GetLocation)

Returns \Psr\Http\Message\RequestInterface

Since 1.0.0

Deprecated 1.4.0

public Firstred\PostNL\Service\LocationServiceInterface::processGetLocationResponseREST(*\$response*)

Process GetLocation Response REST.

Parameters

- **\$response** (mixed)

Returns \Firstred\PostNL\Entity\Response\GetLocationsInAreaResponse | null

Throws \Firstred\PostNL\Exception\ResponseException

Throws \Firstred\PostNL\Exception\HttpClientException

Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Since 1.0.0
Deprecated 1.4.0

public `Firstred\PostNL\Service\LocationServiceInterface::buildGetLocationRequestSOAP($getLocations)`

Build the GetLocation request for the SOAP API.

Parameters

- **\$getLocations** (`Firstred\PostNL\Entity\Request\GetLocation`)

Returns `\Psr\Http\Message\RequestInterface`

Since 1.0.0

Deprecated 1.4.0

public `Firstred\PostNL\Service\LocationServiceInterface::processGetLocationResponseSOAP($response)`

Process GetLocation Response SOAP.

Parameters

- **\$response** (`\Psr\Http\Message\ResponseInterface`)

Returns `\Firstred\PostNL\Entity\Response\GetLocationsInAreaResponse`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Since 1.0.0

Deprecated 1.4.0

ServiceInterface

interface `Firstred\PostNL\Service\ServiceInterface`

Summary

Methods

- `public cacheItem($item)`
- `public retrieveCachedItem($uuid)`
- `public removeCachedItem($item)`
- `public getTtl()`
- `public setTtl($ttl)`
- `public getCache()`
- `public setCache($cache)`

Methods

public `Firstred\PostNL\Service\ServiceInterface::cacheItem($item)`

Cache an item

Parameters

- **\$item** (`Psr\Cache\CacheItemInterface`)

Since 1.0.0

public `Firstred\PostNL\Service\ServiceInterface::retrieveCachedItem($uuid)`

Retrieve a cached item.

Parameters

- **\$uuid** (string)

Returns `\Psr\Cache\CacheItemInterface` | null

Throws \Psr\Cache\InvalidArgumentException

Since 1.0.0

public Firstred\PostNL\Service\ServiceInterface::removeCachedItem(*\$item*)

Delete an item from cache

Parameters

- **\$item** (Psr\Cache\CacheItemInterface)

Since 1.2.0

public Firstred\PostNL\Service\ServiceInterface::getTtl()

Returns \DateInterval | \DateTimeInterface | int | null

Since 1.2.0

public Firstred\PostNL\Service\ServiceInterface::setTtl(*\$ttl=null*)

Parameters

- **\$ttl** (int | \DateTimeInterface | \DateInterval | null)

Returns static

Since 1.2.0

public Firstred\PostNL\Service\ServiceInterface::getCache()

Returns \Psr\Cache\CacheItemPoolInterface | null

Since 1.2.0

public Firstred\PostNL\Service\ServiceInterface::setCache(*\$cache=null*)

Parameters

- **\$cache** (Psr\Cache\CacheItemPoolInterface | null)

Returns static

Since 1.2.0

BarcodeServiceInterface

interface Firstred\PostNL\Service\BarcodeServiceInterface

Class BarcodeService.

Parent *Firstred\PostNL\Service\ServiceInterface*

Summary

Methods

- `public generateBarcodeREST($generateBarcode)`
- `public generateBarcodesREST($generateBarcodes)`
- `public generateBarcodeSOAP($generateBarcode)`
- `public generateBarcodesSOAP($generateBarcodes)`
- `public buildGenerateBarcodeRequestREST($generateBarcode)`
- `public processGenerateBarcodeResponseREST($response)`
- `public buildGenerateBarcodeRequestSOAP($generateBarcode)`
- `public processGenerateBarcodeResponseSOAP($response)`

Methods

public Firstred\PostNL\Service\BarcodeServiceInterface::**generateBarcodeREST**(\$generateBarcode)

Generate a single barcode.

Parameters

- **\$generateBarcode** (*Firstred\PostNL\Entity\Request\GenerateBarcode*)

Returns string Barcode

Throws \Firstred\PostNL\Exception\CifDownException

Throws \Firstred\PostNL\Exception\CifException

Throws \Firstred\PostNL\Exception\HttpClientException

Throws \Firstred\PostNL\Exception\ResponseException

Throws \Firstred\PostNL\Exception\InvalidConfigurationException

Throws \Firstred\PostNL\Exception\CifDownException

Throws \Firstred\PostNL\Exception\CifException

Throws \Firstred\PostNL\Exception\HttpClientException

Throws \Firstred\PostNL\Exception\ResponseException

Throws \Firstred\PostNL\Exception\InvalidConfigurationException

Throws \Firstred\PostNL\Exception\CifDownException

Throws \Firstred\PostNL\Exception\CifException

Throws \Firstred\PostNL\Exception\HttpClientException

Throws \Firstred\PostNL\Exception\ResponseException

Throws \Firstred\PostNL\Exception\InvalidConfigurationException

Throws \Firstred\PostNL\Exception\CifDownException

Throws \Firstred\PostNL\Exception\CifException

Throws \Firstred\PostNL\Exception\HttpClientException

Throws \Firstred\PostNL\Exception\ResponseException

Throws `\Firstred\PostNL\Exception\InvalidConfigurationException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\InvalidConfigurationException`

Since 1.0.0

Deprecated 1.4.0 Use `\generateBarcode` instead

public `Firstred\PostNL\Service\BarcodeServiceInterface::generateBarcodesREST($generateBarcodes)`

Generate multiple barcodes at once.

Parameters

- **\$generateBarcodes** (`Firstred\PostNL\Entity\Request\GenerateBarcode[]`)

Returns `string[]` Barcodes

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\InvalidConfigurationException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\InvalidConfigurationException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\InvalidConfigurationException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\InvalidConfigurationException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\InvalidConfigurationException`

Since 1.0.0

Deprecated 1.4.0 Use ``generateBarcodes`` instead

public Firstred\PostNL\Service\BarcodeServiceInterface::**generateBarcodeSOAP**(\$generateBarcode)

Generate a single barcode.

Parameters

- **\$generateBarcode** (*Firstred\PostNL\Entity\Request\GenerateBarcode*)

Returns string Barcode

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Since 1.0.0

Deprecated 1.4.0 Use ``generateBarcode`` instead

public Firstred\PostNL\Service\BarcodeServiceInterface::**generateBarcodesSOAP**(\$generateBarcodes)

Generate multiple barcodes at once.

Parameters

- **\$generateBarcodes** (*Firstred\PostNL\Entity\Request\GenerateBarcode[]*)

Returns string[] Barcodes

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Since 1.0.0

Deprecated 1.4.0

public `Firstred\PostNL\Service\BarcodeServiceInterface::buildGenerateBarcodeRequestREST($generateBarco`

Build the `generateBarcode` HTTP request for the REST API.

Parameters

- **\$generateBarcode** (`Firstred\PostNL\Entity\Request\GenerateBarcode`)

Returns `\Psr\Http\Message\RequestInterface`

Since 1.0.0

Deprecated 1.4.0

public `Firstred\PostNL\Service\BarcodeServiceInterface::processGenerateBarcodeResponseREST($response)`

Process GenerateBarcode REST response.

Parameters

- **\$response** (`\Psr\Http\Message\ResponseInterface`)

Returns `array`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\InvalidConfigurationException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\InvalidConfigurationException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*
Since 1.0.0
Deprecated 1.4.0

public Firstred\PostNL\Service\BarcodeServiceInterface::buildGenerateBarcodeRequestSOAP(*\$generateBarco*

Build the `generateBarcode` HTTP request for the SOAP API.

Parameters

- **\$generateBarcode** (*Firstred\PostNL\Entity\Request\GenerateBarcode*)

Returns *\Psr\Http\Message\RequestInterface*

Since 1.0.0

Deprecated 1.4.0

public Firstred\PostNL\Service\BarcodeServiceInterface::processGenerateBarcodeResponseSOAP(*\$response*)

Process GenerateBarcode SOAP response.

Parameters

- **\$response** (*\Psr\Http\Message\ResponseInterface*)

Returns *string*

Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Since 1.0.0

Deprecated 1.4.0

ShippingServiceInterface

interface *Firstred\PostNL\Service\ShippingServiceInterface*

Class ShippingService.

Parent *Firstred\PostNL\Service\ServiceInterface*

Summary

Methods

- *public sendShipmentRest(\$sendShipment, \$confirm)*
- *public buildSendShipmentRequestREST(\$sendShipment, \$confirm)*
- *public processSendShipmentResponseREST(\$response)*

Methods

public *Firstred\PostNL\Service\ShippingServiceInterface::sendShipmentRest*(\$sendShipment,
\$confirm=true)

Generate a single Shipping vai REST.

Parameters

- **\$sendShipment** (*Firstred\PostNL\Entity\Request\SendShipment*)
- **\$confirm** (bool)

Returns *\Firstred\PostNL\Entity\Response\SendShipmentResponse* | null

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Since 1.2.0

Deprecated 1.4.0 Use `\sendShipment` instead

```
public Firstred\PostNL\Service\ShippingServiceInterface::buildSendShipmentRequestREST($sendShipment,
                                                                                      $confirm=true)
```

Parameters

- **\$sendShipment** (*Firstred\PostNL\Entity\Request\SendShipment*)
- **\$confirm** (bool)

Returns *\Psr\Http\Message\RequestInterface*

Since 1.2.0

Deprecated 1.4.0

```
public Firstred\PostNL\Service\ShippingServiceInterface::processSendShipmentResponseREST($response)
```

Process the SendShipment REST Response.

Parameters

- **\$response** (*\Psr\Http\Message\ResponseInterface*)

Returns *\Firstred\PostNL\Entity\Response\SendShipmentResponse* | null

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Since 1.2.0

Deprecated 1.4.0

ShippingStatusServiceInterface

interface Firstred\PostNL\Service\ShippingStatusServiceInterface

Class ShippingStatusService.

Parent *Firstred\PostNL\Service\ServiceInterface*

Summary

Methods

- *public currentStatusREST(\$currentStatus)*
- *public currentStatusesREST(\$currentStatuses)*
- *public completeStatusREST(\$completeStatus)*
- *public completeStatusesREST(\$completeStatuses)*
- *public getSignatureREST(\$getSignature)*
- *public getSignaturesREST(\$getSignatures)*
- *public buildCurrentStatusRequestREST(\$currentStatus)*
- *public processCurrentStatusResponseREST(\$response)*
- *public buildCompleteStatusRequestREST(\$completeStatus)*
- *public processCompleteStatusResponseREST(\$response)*
- *public buildGetSignatureRequestREST(\$getSignature)*
- *public processGetSignatureResponseREST(\$response)*
- *public getUpdatedShipmentsREST(\$customer, \$dateTimeFrom, \$dateTimeTo)*
- *public buildGetUpdatedShipmentsRequestREST(\$customer, \$dateTimeFrom, \$dateTimeTo)*
- *public processGetUpdatedShipmentsResponseREST(\$response)*

Methods

public Firstred\PostNL\Service\ShippingStatusServiceInterface::currentStatusREST(*\$currentStatus*)

Gets the current status.

This is a combi-function, supporting the following:

- CurrentStatus (by barcode):
 - Fill the Shipment->Barcode property. Leave the rest empty.
- CurrentStatusByReference:
 - Fill the Shipment->Reference property. Leave the rest empty.

Parameters

- **\$currentStatus** (*Firstred\PostNL\Entity\Request\CurrentStatus* | *Firstred\PostNL\Entity\Request\CurrentStatusByReference*)

Returns *Firstred\PostNL\Entity\Response\CurrentStatusResponse*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Since 1.0.0

Deprecated 1.4.0 Use ``currentStatus`` instead

public `Firstred\PostNL\Service\ShippingStatusServiceInterface::currentStatusesREST($currentStatuses)`

Get current statuses REST.

Parameters

- **\$currentStatuses** (`Firstred\PostNL\Entity\Request\CurrentStatus[]` | `\Firstred\PostNL\Entity\Request\CurrentStatusByReference[]`)

Returns `\Firstred\PostNL\Entity\Response\CurrentStatusResponse[]`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Since 1.2.0

Deprecated 1.4.0 Use ``currentStatuses`` instead

public `Firstred\PostNL\Service\ShippingStatusServiceInterface::completeStatusREST($completeStatus)`

Gets the complete status.

This is a combi-function, supporting the following:

- CurrentStatus (by barcode):
 - Fill the Shipment->Barcode property. Leave the rest empty.
- CurrentStatusByReference:
 - Fill the Shipment->Reference property. Leave the rest empty.

Parameters

- **\$completeStatus** (*Firstred\PostNL\Entity\Request\CompleteStatus* | *\Firstred\PostNL\Entity\Request\CompleteStatusByReference*)

Returns *\Firstred\PostNL\Entity\Response\UpdatedShipmentsResponse*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\NotFoundException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\NotFoundException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\NotFoundException*
Since 1.0.0
Deprecated 1.4.0 Use ``completeStatus`` instead

public *Firstred\PostNL\Service\ShippingStatusServiceInterface::completeStatusesREST(\$completeStatuses)*

Get complete statuses REST.

Parameters

- **\$completeStatuses** (*Firstred\PostNL\Entity\Request\CompleteStatus[]* | *\Firstred\PostNL\Entity\Request\CompleteStatusByReference[]*)

Returns *\Firstred\PostNL\Entity\Response\CompleteStatusResponse[]*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Since 1.2.0

Deprecated 1.4.0 Use ``completeStatuses`` instead

public *Firstred\PostNL\Service\ShippingStatusServiceInterface::getSignatureREST(\$getSignature)*

Gets the complete status.

This is a combi-function, supporting the following:

- CurrentStatus (by barcode):
 - Fill the Shipment->Barcode property. Leave the rest empty.
- CurrentStatusByReference:
 - Fill the Shipment->Reference property. Leave the rest empty.

Parameters

- **\$getSignature** (*Firstred\PostNL\Entity\Request\GetSignature*)

Returns *\Firstred\PostNL\Entity\Response\GetSignatureResponseSignature*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Since 1.0.0
Deprecated 1.4.0 Use ``getSignature`` instead

public `Firstred\PostNL\Service\ShippingStatusServiceInterface::getSignaturesREST($getSignatures)`

Get multiple signatures.

Parameters

- `$getSignatures` (`Firstred\PostNL\Entity\Request\GetSignature[]`)

Returns `\Firstred\PostNL\Entity\Response\GetSignatureResponseSignature[]`

Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Since 1.2.0
Deprecated 1.4.0 Use ``getSignatures`` instead

public Firstred\PostNL\Service\ShippingStatusServiceInterface::buildCurrentStatusRequestREST(*\$currentS*

Build the CurrentStatus request for the REST API.

This function auto-detects and adjusts the following requests:

- CurrentStatus
- CurrentStatusByReference

Parameters

- **\$currentStatus** (*Firstred\PostNL\Entity\Request\CurrentStatus* | *\Firstred\PostNL\Entity\Request\CurrentStatusByReference*)

Returns *\Psr\Http\Message\RequestInterface*

Since 1.0.0

Deprecated 1.4.0

public Firstred\PostNL\Service\ShippingStatusServiceInterface::processCurrentStatusResponseREST(*\$resp*

Process CurrentStatus Response REST.

Parameters

- **\$response** (mixed)

Returns *\Firstred\PostNL\Entity\Response\CurrentStatusResponse*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Since 1.0.0
Deprecated 1.4.0

public Firstred\PostNL\Service\ShippingStatusServiceInterface::buildCompleteStatusRequestREST(*\$completeStatus*)

Build the CompleteStatus request for the REST API.

This function auto-detects and adjusts the following requests:

- CompleteStatus
- CompleteStatusByReference

Parameters

- **\$completeStatus** (*Firstred\PostNL\Entity\Request\CompleteStatus*)

Returns *\Psr\Http\Message\RequestInterface*

Since 1.0.0

Deprecated 1.4.0

public Firstred\PostNL\Service\ShippingStatusServiceInterface::processCompleteStatusResponseREST(*\$response*)

Process CompleteStatus Response REST.

Parameters

- **\$response** (mixed)

Returns *\Firstred\PostNL\Entity\Response\CompleteStatusResponse* | null

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Since 1.0.0
Deprecated 1.4.0

public `Firstred\PostNL\Service\ShippingStatusServiceInterface::buildGetSignatureRequestREST($getSignatureRequest)`

Build the GetSignature request for the REST API.

Parameters

- **\$getSignature** (`Firstred\PostNL\Entity\Request\GetSignature`)

Returns `\Psr\Http\Message\RequestInterface`

Since 1.0.0

Deprecated 1.4.0

public `Firstred\PostNL\Service\ShippingStatusServiceInterface::processGetSignatureResponseREST($response)`

Process GetSignature Response REST.

Parameters

- **\$response** (mixed)

Returns `\Firstred\PostNL\Entity\Response\GetSignatureResponseSignature` |
null

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Since 1.0.0

Deprecated 1.4.0

```
public Firstred\PostNL\Service\ShippingStatusServiceInterface::getUpdatedShipmentsREST($customer,
                                                                                       $date-
                                                                                       Time-
                                                                                       From=null,
                                                                                       $date-
                                                                                       TimeTo=null)
```

Get updated shipments for customer REST.

Parameters

- **\$customer** (*Firstred\PostNL\Entity\Customer*)
- **\$dateTimeFrom** (*DateTimeInterface* | null)
- **\$dateTimeTo** (*DateTimeInterface* | null)

Returns *\Firstred\PostNL\Entity\Response\UpdatedShipmentsResponse[]*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Since 1.2.0
Deprecated 1.4.0

```

public Firstred\PostNL\Service\ShippingStatusServiceInterface::buildGetUpdatedShipmentsRequestREST($
$
T
F
$
T
    
```

Build get updated shipments request REST.

Parameters

- **\$customer** (*Firstred\PostNL\Entity\Customer*)
- **\$dateTimeFrom** (*DateTimeInterface* | null)
- **\$dateTimeTo** (*DateTimeInterface* | null)

Returns *\Psr\Http\Message\RequestInterface***Since** 1.2.0**Deprecated** 1.4.0**public** *Firstred\PostNL\Service\ShippingStatusServiceInterface::processGetUpdatedShipmentsResponseRES*

Process updated shipments response REST.

Parameters

- **\$response** (*\Psr\Http\Message\ResponseInterface*)

Returns *\Firstred\PostNL\Entity\Response\UpdatedShipmentsResponse[]***Throws** *\Firstred\PostNL\Exception\HttpClientException***Throws** *\Firstred\PostNL\Exception\NotSupportedException***Throws** *\Firstred\PostNL\Exception\InvalidArgumentException***Throws** *\Firstred\PostNL\Exception\ResponseException***Throws** *\Firstred\PostNL\Exception\HttpClientException***Throws** *\Firstred\PostNL\Exception\NotSupportedException***Throws** *\Firstred\PostNL\Exception\InvalidArgumentException***Throws** *\Firstred\PostNL\Exception\ResponseException***Throws** *\Firstred\PostNL\Exception\HttpClientException***Throws** *\Firstred\PostNL\Exception\NotSupportedException***Throws** *\Firstred\PostNL\Exception\InvalidArgumentException***Throws** *\Firstred\PostNL\Exception\ResponseException***Throws** *\Firstred\PostNL\Exception\HttpClientException***Throws** *\Firstred\PostNL\Exception\NotSupportedException***Throws** *\Firstred\PostNL\Exception\InvalidArgumentException***Throws** *\Firstred\PostNL\Exception\ResponseException***Since** 1.2.0**Deprecated** 1.4.0

Classes

AbstractService

class Firstred\PostNL\Service\AbstractService

Class AbstractService.

Summary

Methods

- *public* __construct(\$postnl, \$cache, \$ttl)
- *public* __call(\$name, \$args)
- *public* setService(\$object)
- *public static* registerNamespaces(\$element)
- *public static* validateRESTResponse(\$response)
- *public static* validateSOAPResponse(\$xml)
- *public static* getResponseText(\$response)
- *public* retrieveCachedItem(\$uuid)
- *public* cacheItem(\$item)
- *public* removeCachedItem(\$item)
- *public* getTtl()
- *public* setTtl(\$ttl)
- *public* getCache()
- *public* setCache(\$cache)
- *public static* defaultDateFormat(\$writer, \$value)

Constants

```
COMMON_NAMESPACE = \'http://postnl\.nl/cif/services/common/\'
XML_SCHEMA_NAMESPACE = \'http://www\.w3\.org/2001/XMLSchema-instance\'
ENVELOPE_NAMESPACE = \'http://schemas\.xmlsoap\.org/soap/envelope/\'
OLD_ENVELOPE_NAMESPACE = \'http://www\.w3\.org/2003/05/soap-envelope\'
```

Properties

public property Firstred\PostNL\Service\AbstractService::\$namespaces

Type array

protected static property Firstred\PostNL\Service\AbstractService::\$postnl

Type \Firstred\PostNL\PostNL

public static property Firstred\PostNL\Service\AbstractService::\$ttl

TTL for the cache.

`null` disables the cache

`int` is the TTL in seconds

Any `DateTime` will be used as the exact date/time at which to expire the data (auto calculate TTL)

A `DateInterval` can be used as well to set the TTL

Type int | \DateTimeInterface | \DateInterval | null

Deprecated 1.4.0

public static property Firstred\PostNL\Service\AbstractService::\$cache

The [PSR-6](https://www.php-fig.org/psr/psr-6/) CacheItemPoolInterface.

Use a caching library that implements [PSR-6](https://www.php-fig.org/psr/psr-6/) and you'll be good to go

`null` disables the cache

Type \Psr\Cache\CacheItemPoolInterface | null

Deprecated 1.4.0

Methods

public Firstred\PostNL\Service\AbstractService::__construct(\$postnl, \$cache=null, \$ttl=null)

AbstractService constructor.

Parameters

- **\$postnl** (\Firstred\PostNL\PostNL) PostNL instance
- **\$cache** (\Psr\Cache\CacheItemPoolInterface | null)
- **\$ttl** (int | \DateTimeInterface | \DateInterval | null)

public Firstred\PostNL\Service\AbstractService::__call(\$name, \$args)

Parameters

- **\$name** (string)
- **\$args** (mixed)

Returns mixed

Throws *\Firstred\PostNL\Exception\InvalidMethodException*

Since 1.0.0

public Firstred\PostNL\Service\AbstractService::**setService**(\$object)

Set the webservice on the object.

This lets the object know for which service it should serialize

Parameters

- **\$object** (*Firstred\PostNL\Entity\AbstractEntity*)

Returns bool

Since 1.0.0

public static Firstred\PostNL\Service\AbstractService::**registerNamespaces**(\$element)

Register namespaces.

Parameters

- **\$element** (SimpleXMLElement)

Since 1.0.0

public static Firstred\PostNL\Service\AbstractService::**validateRESTResponse**(\$response)

Parameters

- **\$response** (Psr\Http\Message\ResponseInterface | \Exception)

Returns bool

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*
Since 1.0.0

public static Firstred\PostNL\Service\AbstractService::validateSOAPResponse(\$xml)

Parameters

- \$xml (SimpleXMLElement)

Returns bool

Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Since 1.0.0

public static Firstred\PostNL\Service\AbstractService::getResponseText(\$response)

Get the response.

Parameters

- \$response

Returns string

Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Since 1.0.0

public Firstred\PostNL\Service\AbstractService::retrieveCachedItem(\$uuid)

Retrieve a cached item.

Parameters

- \$uuid (string)

Returns \Psr\Cache\CacheItemInterface | null
Throws \Psr\Cache\InvalidArgumentException
Since 1.0.0

```
public Firstred\PostNL\Service\AbstractService::cacheItem($item)
```

Cache an item

Parameters

- **\$item** (Psr\Cache\CacheItemInterface)

Since 1.0.0

```
public Firstred\PostNL\Service\AbstractService::removeCachedItem($item)
```

Delete an item from cache

Parameters

- **\$item** (Psr\Cache\CacheItemInterface)

Throws \Psr\Cache\InvalidArgumentException

Since 1.2.0

```
public Firstred\PostNL\Service\AbstractService::getTtl()
```

Returns \DateInterval | \DateTimeInterface | int | null

Since 1.2.0

```
public Firstred\PostNL\Service\AbstractService::setTtl($ttl=null)
```

Parameters

- **\$ttl** (int | \DateTimeInterface | \DateInterval | null)

Returns static

Since 1.2.0

```
public Firstred\PostNL\Service\AbstractService::getCache()
```

Returns \Psr\Cache\CacheItemPoolInterface | null

Since 1.2.0

Deprecated 1.4.0

```
public Firstred\PostNL\Service\AbstractService::setCache($cache=null)
```

Parameters

- **\$cache** (Psr\Cache\CacheItemPoolInterface | null)

Returns static

Since 1.2.0

Deprecated 1.4.0

```
public static Firstred\PostNL\Service\AbstractService::defaultDateFormat($writer, $value)
```

Write default date format in XML

Parameters

- **\$writer** (Sabre\Xml\Writer)

- **\$value** (DateTimeImmutable)

Since 1.2.0

LocationService

class Firstred\PostNL\Service\LocationService

Class LocationService.

Parent *Firstred\PostNL\Service\AbstractService*

Implements *Firstred\PostNL\Service\LocationServiceInterface*

Summary

Methods

- *public* *getNearestLocationsREST(\$getNearestLocations)*
- *public* *getNearestLocationsSOAP(\$getNearestLocations)*
- *public* *getLocationsInAreaREST(\$getLocations)*
- *public* *getLocationsInAreaSOAP(\$getNearestLocations)*
- *public* *getLocationREST(\$getLocation)*
- *public* *getLocationSOAP(\$getLocation)*
- *public* *buildGetNearestLocationsRequestREST(\$getNearestLocations)*
- *public* *processGetNearestLocationsResponseREST(\$response)*
- *public* *buildGetNearestLocationsRequestSOAP(\$getLocations)*
- *public* *processGetNearestLocationsResponseSOAP(\$response)*
- *public* *buildGetLocationsInAreaRequestREST(\$getLocations)*
- *public* *processGetLocationsInAreaResponseREST(\$response)*
- *public* *buildGetLocationsInAreaRequestSOAP(\$getLocations)*
- *public* *processGetLocationsInAreaResponseSOAP(\$response)*
- *public* *buildGetLocationRequestREST(\$getLocation)*
- *public* *processGetLocationResponseREST(\$response)*
- *public* *buildGetLocationRequestSOAP(\$getLocations)*
- *public* *processGetLocationResponseSOAP(\$response)*

Constants

```
VERSION = \'2\1\'
LIVE_ENDPOINT = \'https://api\postnl\.nl/shipment/v2\1/locations\'
SANDBOX_ENDPOINT = \'https://api\-sandbox\postnl\.nl/shipment/v2\1/locations\'
SOAP_ACTION = \'http://postnl\.nl/cif/services/LocationWebService/ILocationWebService/GetNearestLocations\'
SOAP_ACTION_LOCATIONS_IN_AREA = \'http://postnl\.nl/cif/services/LocationWebService/ILocationWebService/GetLocationsInArea\'
SERVICES_NAMESPACE = \'http://postnl\.nl/cif/services/LocationWebService/\''
DOMAIN_NAMESPACE = \'http://postnl\.nl/cif/domain/LocationWebService/\'
```

Properties

```
public property Firstred\PostNL\Service\LocationService::$namespaces
```

Namespaces uses for the SOAP version of this service.

Type array

Methods

```
public Firstred\PostNL\Service\LocationService::getNearestLocationsREST($getNearestLocations)
```

Get the nearest locations via REST.

Parameters

- **`$getNearestLocations`** (*Firstred\PostNL\Entity\Request\GetNearestLocations*)

Returns *Firstred\PostNL\Entity\Response\GetNearestLocationsResponse*

Throws *Firstred\PostNL\Exception\CifDownException*

Throws *Firstred\PostNL\Exception\CifException*

Throws *Firstred\PostNL\Exception\HttpClientException*

Throws *Firstred\PostNL\Exception\NotSupportedException*

Throws *Firstred\PostNL\Exception\InvalidArgumentException*

Throws *Firstred\PostNL\Exception\ResponseException*

Throws *Firstred\PostNL\Exception\NotFoundException*

Throws *Firstred\PostNL\Exception\CifDownException*

Throws *Firstred\PostNL\Exception\CifException*

Throws *Firstred\PostNL\Exception\HttpClientException*

Throws *Firstred\PostNL\Exception\NotSupportedException*

Throws *Firstred\PostNL\Exception\InvalidArgumentException*

Throws *Firstred\PostNL\Exception\ResponseException*

Throws *Firstred\PostNL\Exception\NotFoundException*

Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Since 1.0.0
Deprecated 1.4.0 Use ``getNearestLocations`` instead

public `Firstred\PostNL\Service\LocationService::getNearestLocationsSOAP($getNearestLocations)`

Get the nearest locations via SOAP.

Parameters

- **\$getNearestLocations** (*Firstred\PostNL\Entity\Request\GetNearestLocations*)

Returns *\Firstred\PostNL\Entity\Response\GetNearestLocationsResponse*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Since 1.0.0

Deprecated 1.4.0 Use ``getNearestLocations`` instead

public *Firstred\PostNL\Service\LocationService::getLocationsInAreaREST(\$getLocations)*

Get the nearest locations via REST.

Parameters

- **\$getLocations** (*Firstred\PostNL\Entity\Request\GetLocationsInArea*)

Returns *\Firstred\PostNL\Entity\Response\GetLocationsInAreaResponse*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Since 1.0.0

Deprecated 1.4.0 Use ``getLocationsInArea`` instead

public `Firstred\PostNL\Service\LocationService::getLocationsInAreaSOAP($getNearestLocations)`

Get the nearest locations via SOAP.

Parameters

- **\$getNearestLocations** (`Firstred\PostNL\Entity\Request\GetLocationsInArea`)

Returns `\Firstred\PostNL\Entity\Response\GetLocationsInAreaResponse`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Since 1.0.0

Deprecated 1.4.0 Use `\getLocationsInArea` instead

public *Firstred\PostNL\Service\LocationService::getLocationREST(\$getLocation)*

Get the location via REST.

Parameters

- **\$getLocation** (*Firstred\PostNL\Entity\Request\GetLocation*)

Returns *\Firstred\PostNL\Entity\Response\GetLocationsInAreaResponse*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotFoundException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotFoundException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotFoundException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotFoundException*
Since 1.0.0
Deprecated 1.4.0 Use ``getLocation``

public *Firstred\PostNL\Service\LocationService::getLocationSOAP(\$getLocation)*

Get the nearest locations via SOAP.

Parameters

- **\$getLocation** (*Firstred\PostNL\Entity\Request\GetLocation*)

Returns *\Firstred\PostNL\Entity\Response\GetLocationsInAreaResponse*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotFoundException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Since 1.0.0
Deprecated 1.4.0 Use ``getLocation``

public `Firstred\PostNL\Service\LocationService::buildGetNearestLocationsRequestREST($getNearestLocations)`

Build the GenerateLabel request for the REST API.

Parameters

- `$getNearestLocations` (`Firstred\PostNL\Entity\Request\GetNearestLocations`)

Returns `\Psr\Http\Message\RequestInterface`

Since 1.0.0

Deprecated 1.4.0

public `Firstred\PostNL\Service\LocationService::processGetNearestLocationsResponseREST($response)`

Process GetNearestLocations Response REST.

Parameters

- `$response` (mixed)

Returns `\Firstred\PostNL\Entity\Response\GetNearestLocationsResponse` | null

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Since 1.0.0
Deprecated 1.4.0

public `Firstred\PostNL\Service\LocationService::buildGetNearestLocationsRequestSOAP($getLocations)`

Build the GenerateLabel request for the SOAP API.

Parameters

- **\$getLocations** (`Firstred\PostNL\Entity\Request\GetNearestLocations`)

Returns `\Psr\Http\Message\RequestInterface`

Since 1.0.0

Deprecated 1.4.0

public `Firstred\PostNL\Service\LocationService::processGetNearestLocationsResponseSOAP($response)`

Process GetNearestLocations Response SOAP.

Parameters

- **\$response** (`\Psr\Http\Message\ResponseInterface`)

Returns `\Firstred\PostNL\Entity\Response\GetNearestLocationsResponse`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Since 1.0.0

Deprecated 1.4.0

public `Firstred\PostNL\Service\LocationService::buildGetLocationsInAreaRequestREST($getLocations)`

Build the GetLocationsInArea request for the REST API.

Parameters

- **\$getLocations** (`Firstred\PostNL\Entity\Request\GetLocationsInArea`)

Returns `\Psr\Http\Message\RequestInterface`

Since 1.0.0

Deprecated 1.4.0

public `Firstred\PostNL\Service\LocationService::processGetLocationsInAreaResponseREST($response)`

Process GetLocationsInArea Response REST.

Parameters

- **\$response** (mixed)

Returns `\Firstred\PostNL\Entity\Response\GetLocationsInAreaResponse | null`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Since 1.0.0

Deprecated 1.4.0

```
public Firstred\PostNL\Service\LocationService::buildGetLocationsInAreaRequestSOAP($getLocations)
```

Build the GetLocationsInArea request for the SOAP API.

Parameters

- **\$getLocations** (*Firstred\PostNL\Entity\Request\GetLocationsInArea*)

Returns \Psr\Http\Message\RequestInterface

Since 1.0.0

Deprecated 1.4.0

```
public Firstred\PostNL\Service\LocationService::processGetLocationsInAreaResponseSOAP($response)
```

Parameters

- **\$response** (Psr\Http\Message\ResponseInterface)

Returns *\Firstred\PostNL\Entity\Response\GetLocationsInAreaResponse*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Since 1.0.0

Deprecated 1.4.0

```
public Firstred\PostNL\Service\LocationService::buildGetLocationRequestREST($getLocation)
```

Build the GetLocation request for the REST API.

Parameters

- **\$getLocation** (*Firstred\PostNL\Entity\Request\GetLocation*)

Returns \Psr\Http\Message\RequestInterface

Since 1.0.0

Deprecated 1.4.0

```
public Firstred\PostNL\Service\LocationService::processGetLocationResponseREST($response)
```

Process GetLocation Response REST.

Parameters

- ***\$response*** (mixed)

Returns \Firstred\PostNL\Entity\Response\GetLocationsInAreaResponse | null

Throws \Firstred\PostNL\Exception\ResponseException

Throws \Firstred\PostNL\Exception\HttpClientException

Throws \Firstred\PostNL\Exception\NotSupportedException

Throws \Firstred\PostNL\Exception\InvalidArgumentException

Throws \Firstred\PostNL\Exception\ResponseException

Throws \Firstred\PostNL\Exception\HttpClientException

Throws \Firstred\PostNL\Exception\NotSupportedException

Throws \Firstred\PostNL\Exception\InvalidArgumentException

Throws \Firstred\PostNL\Exception\ResponseException

Throws \Firstred\PostNL\Exception\HttpClientException

Throws \Firstred\PostNL\Exception\NotSupportedException

Throws \Firstred\PostNL\Exception\InvalidArgumentException

Throws \Firstred\PostNL\Exception\ResponseException

Throws \Firstred\PostNL\Exception\HttpClientException

Throws \Firstred\PostNL\Exception\NotSupportedException

Throws \Firstred\PostNL\Exception\InvalidArgumentException

Since 1.0.0

Deprecated 1.4.0

```
public Firstred\PostNL\Service\LocationService::buildGetLocationRequestSOAP($getLocations)
```

Build the GetLocation request for the SOAP API.

Parameters

- ***\$getLocations*** (Firstred\PostNL\Entity\Request\GetLocation)

Returns \Psr\Http\Message\RequestInterface

Since 1.0.0

Deprecated 1.4.0

```
public Firstred\PostNL\Service\LocationService::processGetLocationResponseSOAP($response)
```

Process GetLocation Response SOAP.

Parameters

- ***\$response*** (Psr\Http\Message\ResponseInterface)

Returns \Firstred\PostNL\Entity\Response\GetLocationsInAreaResponse

Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Since 1.0.0
Deprecated 1.4.0

ShippingService

class *Firstred\PostNL\Service\ShippingService*

Class ShippingService.

Parent *Firstred\PostNL\Service\AbstractService*

Implements *Firstred\PostNL\Service\ShippingServiceInterface*

Summary

Methods

- *public sendShipmentRest(\$sendShipment, \$confirm)*
- *public buildSendShipmentRequestREST(\$sendShipment, \$confirm)*
- *public processSendShipmentResponseREST(\$response)*

Constants

```
VERSION = \'1\'
LIVE_ENDPOINT = \'https://api\..postnl\..nl/v1/shipment\'
SANDBOX_ENDPOINT = \'https://api\..sandbox\..postnl\..nl/v1/shipment\'
DOMAIN_NAMESPACE = \'http://postnl\..nl/\'
```

Methods

```
public Firstred\PostNL\Service\ShippingService::sendShipmentRest($sendShipment,
                                                                $confirm=true)
```

Generate a single Shipping vai REST.

Parameters

- **\$sendShipment** (*Firstred\PostNL\Entity\Request\SendShipment*)
- **\$confirm** (bool)

Returns *\Firstred\PostNL\Entity\Response\SendShipmentResponse* | null

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws [\Firstred\PostNL\Exception\InvalidArgumentException](#)

Throws [\Firstred\PostNL\Exception\CifDownException](#)

Throws [\Firstred\PostNL\Exception\CifException](#)

Throws [\Firstred\PostNL\Exception\ResponseException](#)

Throws [\Firstred\PostNL\Exception\HttpClientException](#)

Throws [\Firstred\PostNL\Exception\NotSupportedException](#)

Throws [\Firstred\PostNL\Exception\InvalidArgumentException](#)

Throws [\Firstred\PostNL\Exception\CifDownException](#)

Throws [\Firstred\PostNL\Exception\CifException](#)

Throws [\Firstred\PostNL\Exception\ResponseException](#)

Throws [\Firstred\PostNL\Exception\HttpClientException](#)

Throws [\Firstred\PostNL\Exception\NotSupportedException](#)

Throws [\Firstred\PostNL\Exception\InvalidArgumentException](#)

Since 1.2.0

Deprecated 1.4.0 Use ``sendShipment`` instead

```
public Firstred\PostNL\Service\ShippingService::buildSendShipmentRequestREST($sendShipment,  
                                                                           $con-  
                                                                           firm=true)
```

Parameters

- **\$sendShipment** ([Firstred\PostNL\Entity\Request\SendShipment](#))
- **\$confirm** (bool)

Returns [\Psr\Http\Message\RequestInterface](#)

Since 1.2.0

Deprecated 1.4.0

```
public Firstred\PostNL\Service\ShippingService::processSendShipmentResponseREST($response)
```

Process the SendShipment REST Response.

Parameters

- **\$response** ([Psr\Http\Message\ResponseInterface](#))

Returns [\Firstred\PostNL\Entity\Response\SendShipmentResponse](#) | null

Throws [\Firstred\PostNL\Exception\ResponseException](#)

Throws [\Firstred\PostNL\Exception\HttpClientException](#)

Throws [\Firstred\PostNL\Exception\NotSupportedException](#)

Throws [\Firstred\PostNL\Exception\InvalidArgumentException](#)

Throws [\Firstred\PostNL\Exception\ResponseException](#)

Throws [\Firstred\PostNL\Exception\HttpClientException](#)

Throws [\Firstred\PostNL\Exception\NotSupportedException](#)

Throws [\Firstred\PostNL\Exception\InvalidArgumentException](#)

Throws [\Firstred\PostNL\Exception\ResponseException](#)

Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Since 1.2.0
Deprecated 1.4.0

BarcodeService

class `Firstred\PostNL\Service\BarcodeService`

Class BarcodeService.

Parent `Firstred\PostNL\Service\AbstractService`
Implements `Firstred\PostNL\Service\BarcodeServiceInterface`

Summary

Methods

- `public generateBarcodeREST($generateBarcode)`
- `public generateBarcodeSOAP($generateBarcode)`
- `public generateBarcodesREST($generateBarcodes)`
- `public generateBarcodesSOAP($generateBarcodes)`
- `public buildGenerateBarcodeRequestREST($generateBarcode)`
- `public buildGenerateBarcodeRequestSOAP($generateBarcode)`
- `public processGenerateBarcodeResponseREST($response)`
- `public processGenerateBarcodeResponseSOAP($response)`

Constants

`VERSION = \'1\'.1\'`
`SANDBOX_ENDPOINT = \'https://api\ sandbox\ .postnl\ .nl/shipment/v1\_1/barcode\'`
`LIVE_ENDPOINT = \'https://api\ .postnl\ .nl/shipment/v1\_1/barcode\'`
`SOAP_ACTION = \'http://postnl\ .nl/cif/services/BarcodeWebService/IBarcodeWebService/GenerateBarcode\'`
`ENVELOPE_NAMESPACE = \'http://schemas\ .xmlsoap\ .org/soap/envelope/\'`
`SERVICES_NAMESPACE = \'http://postnl\ .nl/cif/services/BarcodeWebService/\'`
`DOMAIN_NAMESPACE = \'http://postnl\ .nl/cif/domain/BarcodeWebService/\'`

Properties

protected static property Firstred\PostNL\Service\BarcodeService::\$postnl

Type *\Firstred\PostNL\PostNL*

public property Firstred\PostNL\Service\BarcodeService::\$namespaces

Namespaces uses for the SOAP version of this service.

Type array

Methods

public Firstred\PostNL\Service\BarcodeService::generateBarcodeREST(*\$generateBarcode*)

Generate a single barcode.

Parameters

- **\$generateBarcode** (*Firstred\PostNL\Entity\Request\GenerateBarcode*)

Returns string | null Barcode

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*

Since 1.0.0

Deprecated 1.4.0 Use `\generateBarcode` instead

public Firstred\PostNL\Service\BarcodeService::**generateBarcodeSOAP**(\$generateBarcode)

Generate a single barcode.

Parameters

- **\$generateBarcode** (*Firstred\PostNL\Entity\Request\GenerateBarcode*)

Returns string Barcode

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Since 1.0.0

Deprecated 1.4.0 Use `\generateBarcode` instead

public Firstred\PostNL\Service\BarcodeService::**generateBarcodesREST**(\$generateBarcodes)

Generate multiple barcodes at once.

Parameters

- **\$generateBarcodes** (*Firstred\PostNL\Entity\Request\GenerateBarcode[]*)

Returns string[] Barcodes

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws `\Firstred\PostNL\Exception\InvalidConfigurationException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\InvalidConfigurationException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\InvalidConfigurationException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\InvalidConfigurationException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\InvalidConfigurationException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\InvalidConfigurationException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Since 1.0.0

Deprecated 1.4.0 Use ``generateBarcodes`` instead

public `Firstred\PostNL\Service\BarcodeService::generateBarcodesSOAP($generateBarcodes)`

Generate multiple barcodes at once.

Parameters

- `$generateBarcodes` (`Firstred\PostNL\Entity\Request\GenerateBarcode[]`)

Returns string[] Barcodes

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Since 1.0.0

Deprecated 1.4.0

public Firstred\PostNL\Service\BarcodeService::buildGenerateBarcodeRequestREST(*\$generateBarcode*)

Build the `generateBarcode` HTTP request for the REST API.

Parameters

- ***\$generateBarcode*** (*Firstred\PostNL\Entity\Request\GenerateBarcode*)

Returns *\Psr\Http\Message\RequestInterface*

Since 1.0.0

Deprecated 1.4.0

public Firstred\PostNL\Service\BarcodeService::buildGenerateBarcodeRequestSOAP(*\$generateBarcode*)

Build the `generateBarcode` HTTP request for the SOAP API.

Parameters

- **\$generateBarcode** (*Firstred\PostNL\Entity\Request\GenerateBarcode*)

Returns \Psr\Http\Message\RequestInterface**Since** 1.0.0**Deprecated** 1.4.0**public** Firstred\PostNL\Service\BarcodeService::processGenerateBarcodeResponseREST(*\$response*)

Process GenerateBarcode REST response.

Parameters

- **\$response** (Psr\Http\Message\ResponseInterface)

Returns \stdClass**Throws** *\Firstred\PostNL\Exception\CifDownException***Throws** *\Firstred\PostNL\Exception\CifException***Throws** *\Firstred\PostNL\Exception\HttpClientException***Throws** *\Firstred\PostNL\Exception\ResponseException***Throws** *\Firstred\PostNL\Exception\InvalidConfigurationException***Throws** *\Firstred\PostNL\Exception\CifDownException***Throws** *\Firstred\PostNL\Exception\CifException***Throws** *\Firstred\PostNL\Exception\HttpClientException***Throws** *\Firstred\PostNL\Exception\ResponseException***Throws** *\Firstred\PostNL\Exception\InvalidConfigurationException***Throws** *\Firstred\PostNL\Exception\CifDownException***Throws** *\Firstred\PostNL\Exception\CifException***Throws** *\Firstred\PostNL\Exception\HttpClientException***Throws** *\Firstred\PostNL\Exception\ResponseException***Throws** *\Firstred\PostNL\Exception\InvalidConfigurationException***Throws** *\Firstred\PostNL\Exception\CifDownException***Throws** *\Firstred\PostNL\Exception\CifException***Throws** *\Firstred\PostNL\Exception\HttpClientException***Throws** *\Firstred\PostNL\Exception\ResponseException***Throws** *\Firstred\PostNL\Exception\InvalidConfigurationException***Throws** *\Firstred\PostNL\Exception\CifDownException***Throws** *\Firstred\PostNL\Exception\CifException***Throws** *\Firstred\PostNL\Exception\HttpClientException***Throws** *\Firstred\PostNL\Exception\ResponseException***Throws** *\Firstred\PostNL\Exception\InvalidConfigurationException***Since** 1.0.0**Deprecated** 1.4.0

```
public Firstred\PostNL\Service\BarcodeService::processGenerateBarcodeResponseSOAP($response)
```

Process GenerateBarcode SOAP response.

Parameters

- ***\$response*** (Psr\Http\Message\ResponseInterface)

Returns string

Throws \Firstred\PostNL\Exception\CifDownException

Throws \Firstred\PostNL\Exception\CifException

Throws \Firstred\PostNL\Exception\HttpClientException

Throws \Firstred\PostNL\Exception\ResponseException

Throws \Firstred\PostNL\Exception\CifDownException

Throws \Firstred\PostNL\Exception\CifException

Throws \Firstred\PostNL\Exception\HttpClientException

Throws \Firstred\PostNL\Exception\ResponseException

Throws \Firstred\PostNL\Exception\CifDownException

Throws \Firstred\PostNL\Exception\CifException

Throws \Firstred\PostNL\Exception\HttpClientException

Throws \Firstred\PostNL\Exception\ResponseException

Throws \Firstred\PostNL\Exception\CifDownException

Throws \Firstred\PostNL\Exception\CifException

Throws \Firstred\PostNL\Exception\HttpClientException

Throws \Firstred\PostNL\Exception\ResponseException

Since 1.0.0

Deprecated 1.4.0

DeliveryDateService

```
class Firstred\PostNL\Service\DeliveryDateService
```

Class DeliveryDateService.

Parent *Firstred\PostNL\Service\AbstractService*

Implements *Firstred\PostNL\Service\DeliveryDateServiceInterface*

Summary

Methods

- `public getDeliveryDateREST($getDeliveryDate)`
- `public getDeliveryDateSOAP($getDeliveryDate)`
- `public getSentDateREST($getSentDate)`
- `public getSentDateSOAP($getSentDate)`
- `public buildGetDeliveryDateRequestREST($getDeliveryDate)`
- `public processGetDeliveryDateResponseREST($response)`
- `public buildGetDeliveryDateRequestSOAP($getDeliveryDate)`
- `public processGetDeliveryDateResponseSOAP($response)`
- `public buildGetSentDateRequestREST($getSentDate)`
- `public processGetSentDateResponseREST($response)`
- `public buildGetSentDateRequestSOAP($getSentDate)`
- `public processGetSentDateResponseSOAP($response)`

Constants

`VERSION = \'2\2\'`

`LIVE_ENDPOINT = \'https://api\postnl\.nl/shipment/v2\2/calculate/date\'`

`SANDBOX_ENDPOINT = \'https://api\-sandbox\postnl\.nl/shipment/v2\2/calculate/date\'`

`SOAP_ACTION = \'http://postnl\.nl/cif/services/DeliveryDateWebService/
IDeliveryDateWebService/GetDeliveryDate\'`

`SERVICES_NAMESPACE = \'http://postnl\.nl/cif/services/DeliveryDateWebService/\'`

`DOMAIN_NAMESPACE = \'http://postnl\.nl/cif/domain/DeliveryDateWebService/\'`

Properties

public property Firstred\PostNL\Service\DeliveryDateService::\$namespaces

Namespaces uses for the SOAP version of this service.

Type array

Methods

public Firstred\PostNL\Service\DeliveryDateService::getDeliveryDateREST(*\$getDeliveryDate*)

Get a delivery date via REST.

Parameters

- *\$getDeliveryDate* (*Firstred\PostNL\Entity\Request\GetDeliveryDate*)

Returns *\Firstred\PostNL\Entity\Response\GetDeliveryDateResponse*

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Since 1.0.0

Deprecated 1.4.0 Use ``getDeliveryDate`` instead

public Firstred\PostNL\Service\DeliveryDateService::getDeliveryDateSOAP(*\$getDeliveryDate*)

Get a delivery date via SOAP.

Parameters

- **\$getDeliveryDate** (*Firstred\PostNL\Entity\Request\GetDeliveryDate*)

Returns *\Firstred\PostNL\Entity\Response\GetDeliveryDateResponse*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Since 1.0.0

Deprecated 1.4.0 Use ``getDeliveryDate`` instead

public Firstred\PostNL\Service\DeliveryDateService::getSentDateREST(*\$getSentDate*)

Get the sent date via REST.

Parameters

- **\$getSentDate** (*Firstred\PostNL\Entity\Request\GetSentDateRequest*)

Returns *\Firstred\PostNL\Entity\Response\GetSentDateResponse*

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\NotFoundException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\NotFoundException*
Since 1.0.0
Deprecated 1.4.0 Use ``getSentDate`` instead

public *Firstred\PostNL\Service\DeliveryDateService::getSentDateSOAP(\$getSentDate)*

Generate a single label via SOAP.

Parameters

- **\$getSentDate** (*Firstred\PostNL\Entity\Request\GetSentDateRequest*)

Returns *\Firstred\PostNL\Entity\Response\GetSentDateResponse*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotFoundException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotFoundException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotFoundException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotFoundException*
Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Since 1.0.0

Deprecated 1.4.0 Use ``getSentDate`` instead

public Firstred\PostNL\Service\DeliveryDateService::buildGetDeliveryDateRequestREST(*\$getDeliveryDate*)

Build the GetDeliveryDate request for the REST API.

Parameters

- **\$getDeliveryDate** (*Firstred\PostNL\Entity\Request\GetDeliveryDate*)

Returns *\Psr\Http\Message\RequestInterface*

Since 1.0.0

Deprecated 1.4.0

public Firstred\PostNL\Service\DeliveryDateService::processGetDeliveryDateResponseREST(*\$response*)

Process GetDeliveryDate REST Response.

Parameters

- **\$response** (mixed)

Returns *\Firstred\PostNL\Entity\Response\GetDeliveryDateResponse* | null

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Since 1.0.0

Deprecated 1.4.0

public Firstred\PostNL\Service\DeliveryDateService::buildGetDeliveryDateRequestSOAP(*\$getDeliveryDate*)

Build the GetDeliveryDate request for the SOAP API.

Parameters

- **\$getDeliveryDate** (*Firstred\PostNL\Entity\Request\GetDeliveryDate*)

Returns *\Psr\Http\Message\RequestInterface*

Since 1.0.0

Deprecated 1.4.0

public Firstred\PostNL\Service\DeliveryDateService::processGetDeliveryDateResponseSOAP(*\$response*)

Parameters

- **\$response** (Psr\Http\Message\ResponseInterface)

Returns \Firstred\PostNL\Entity\Response\GetDeliveryDateResponse

Throws \Firstred\PostNL\Exception\CifDownException

Throws \Firstred\PostNL\Exception\CifException

Throws \Firstred\PostNL\Exception\ResponseException

Throws \Firstred\PostNL\Exception\HttpClientException

Throws \Firstred\PostNL\Exception\CifDownException

Throws \Firstred\PostNL\Exception\CifException

Throws \Firstred\PostNL\Exception\ResponseException

Throws \Firstred\PostNL\Exception\HttpClientException

Throws \Firstred\PostNL\Exception\CifDownException

Throws \Firstred\PostNL\Exception\CifException

Throws \Firstred\PostNL\Exception\ResponseException

Throws \Firstred\PostNL\Exception\HttpClientException

Throws \Firstred\PostNL\Exception\CifDownException

Throws \Firstred\PostNL\Exception\CifException

Throws \Firstred\PostNL\Exception\ResponseException

Throws \Firstred\PostNL\Exception\HttpClientException

Since 1.0.0

Deprecated 1.4.0

public Firstred\PostNL\Service\DeliveryDateService::buildGetSentDateRequestREST(*\$getSentDate*)

Build the GetSentDate request for the REST API.

Parameters

- **\$getSentDate** (Firstred\PostNL\Entity\Request\GetSentDateRequest)

Returns \Psr\Http\Message\RequestInterface

Since 1.0.0

Deprecated 1.4.0

public Firstred\PostNL\Service\DeliveryDateService::processGetSentDateResponseREST(*\$response*)

Process GetSentDate REST Response.

Parameters

- **\$response** (mixed)

Returns \Firstred\PostNL\Entity\Response\GetSentDateResponse | null

Throws \Firstred\PostNL\Exception\ResponseException

Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Since 1.0.0
Deprecated 1.4.0

public `Firstred\PostNL\Service\DeliveryDateService::buildGetSentDateRequestSOAP($getSentDate)`

Build the GetSentDate request for the SOAP API.

Parameters

- **\$getSentDate** (`Firstred\PostNL\Entity\Request\GetSentDateRequest`)

Returns `\Psr\Http\Message\RequestInterface`

Since 1.0.0

Deprecated 1.4.0

public `Firstred\PostNL\Service\DeliveryDateService::processGetSentDateResponseSOAP($response)`

Process GetSentDate SOAP Response.

Parameters

- **\$response** (`\Psr\Http\Message\ResponseInterface`)

Returns `\Firstred\PostNL\Entity\Response\GetSentDateResponse`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Since 1.0.0
Deprecated 1.4.0

TimeframeService

class Firstred\PostNL\Service\TimeframeService

Class TimeframeService.

Parent *Firstred\PostNL\Service\AbstractService*
Implements *Firstred\PostNL\Service\TimeframeServiceInterface*

Summary

Methods

- *public* *getTimeframesREST(\$getTimeframes)*
- *public* *getTimeframesSOAP(\$getTimeframes)*
- *public* *buildGetTimeframesRequestREST(\$getTimeframes)*
- *public* *processGetTimeframesResponseREST(\$response)*
- *public* *buildGetTimeframesRequestSOAP(\$getTimeframes)*
- *public* *processGetTimeframesResponseSOAP(\$response)*

Constants

VERSION = *\ '2\ .1\ '*
LIVE_ENDPOINT = *\ 'https://api\ .postnl\ .nl/shipment/v2_1/calculate/timeframes\ '*
SANDBOX_ENDPOINT = *\ 'https://api\ -sandbox\ .postnl\ .nl/shipment/v2_1/calculate/timeframes\ '*
SOAP_ACTION = *\ 'http://postnl\ .nl/cif/services/TimeframeWebService/ITimeframeWebService/GetTimeframes\ '*
SERVICES_NAMESPACE = *\ 'http://postnl\ .nl/cif/services/TimeframeWebService/\ '*
DOMAIN_NAMESPACE = *\ 'http://postnl\ .nl/cif/domain/TimeframeWebService/\ '*

Properties

public property Firstred\PostNL\Service\TimeframeService::\$namespaces

Namespaces uses for the SOAP version of this service.

Type array

Methods

public Firstred\PostNL\Service\TimeframeService::getTimeframesREST(*\$getTimeframes*)

Get timeframes via REST.

Parameters

- **\$getTimeframes** (*Firstred\PostNL\Entity\Request\GetTimeframes*)

Returns *\Firstred\PostNL\Entity\Response\ResponseTimeframes*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Since 1.0.0
Deprecated 1.4.0 Use ``getTimeframes`` instead

public `Firstred\PostNL\Service\TimeframeService::getTimeframesSOAP($getTimeframes)`

Get timeframes via SOAP.

Parameters

- **\$getTimeframes** (`Firstred\PostNL\Entity\Request\GetTimeframes`)

Returns `\Firstred\PostNL\Entity\Response\ResponseTimeframes`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Since 1.0.0

Deprecated 1.4.0 Use ``getTimeframes`` instead

```
public Firstred\PostNL\Service\TimeframeService::buildGetTimeframesRequestREST($getTimeframes)
```

Build the GetTimeframes request for the REST API.

Parameters

- *\$getTimeframes* (`Firstred\PostNL\Entity\Request\GetTimeframes`)

Returns `\Psr\Http\Message\RequestInterface`

Since 1.0.0

Deprecated 1.4.0

```
public Firstred\PostNL\Service\TimeframeService::processGetTimeframesResponseREST($response)
```

Process GetTimeframes Response REST.

Parameters

- *\$response* (mixed)

Returns `\Firstred\PostNL\Entity\Response\ResponseTimeframes` | null

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Since 1.0.0
Deprecated 1.4.0

public Firstred\PostNL\Service\TimeframeService::buildGetTimeframesRequestSOAP(*\$getTimeframes*)

Build the GetTimeframes request for the SOAP API.

Parameters

- *\$getTimeframes* (*Firstred\PostNL\Entity\Request\GetTimeframes*)

Returns *\Psr\Http\Message\RequestInterface*

Since 1.0.0

Deprecated 1.4.0

public Firstred\PostNL\Service\TimeframeService::processGetTimeframesResponseSOAP(*\$response*)

Process GetTimeframes Response SOAP.

Parameters

- *\$response* (*\Psr\Http\Message\ResponseInterface*)

Returns *\Firstred\PostNL\Entity\Response\ResponseTimeframes*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Since 1.0.0

Deprecated 1.4.0

ShippingStatusService

class *Firstred\PostNL\Service\ShippingStatusService*

Class ShippingStatusService.

Parent *Firstred\PostNL\Service\AbstractService*

Implements *Firstred\PostNL\Service\ShippingStatusServiceInterface*

Summary

Methods

- *public* *currentStatusREST(\$currentStatus)*
- *public* *currentStatusesREST(\$currentStatuses)*
- *public* *completeStatusREST(\$completeStatus)*
- *public* *completeStatusesREST(\$completeStatuses)*
- *public* *getSignatureREST(\$getSignature)*
- *public* *getSignaturesREST(\$getSignatures)*
- *public* *buildCurrentStatusRequestREST(\$currentStatus)*
- *public* *processCurrentStatusResponseREST(\$response)*
- *public* *buildCompleteStatusRequestREST(\$completeStatus)*
- *public* *processCompleteStatusResponseREST(\$response)*
- *public* *buildGetSignatureRequestREST(\$getSignature)*
- *public* *processGetSignatureResponseREST(\$response)*
- *public* *getUpdatedShipmentsREST(\$customer, \$dateTimeFrom, \$dateTimeTo)*
- *public* *buildGetUpdatedShipmentsRequestREST(\$customer, \$dateTimeFrom, \$dateTimeTo)*
- *public* *processGetUpdatedShipmentsResponseREST(\$response)*

Constants

```
VERSION = \'2\'
LIVE_ENDPOINT = \'https://api\..postnl\..nl/shipment/v2/status\'
SANDBOX_ENDPOINT = \'https://api\..sandbox\..postnl\..nl/shipment/v2/status\'
DOMAIN_NAMESPACE = \'http://postnl\..nl/\'
```

Methods

```
public Firstred\PostNL\Service\ShippingStatusService::currentStatusREST($currentStatus)
```

Gets the current status.

This is a combi-function, supporting the following:

- CurrentStatus (by barcode):
 - Fill the Shipment->Barcode property. Leave the rest empty.
- CurrentStatusByReference:
 - Fill the Shipment->Reference property. Leave the rest empty.
- CurrentStatusByPhase:
 - Fill the Shipment->PhaseCode property, do not pass Barcode or Reference.
Optionally add DateFrom and/or DateTo.
- CurrentStatusByStatus:
 - Fill the Shipment->StatusCode property. Leave the rest empty.

Parameters

- **\$currentStatus** (*Firstred\PostNL\Entity\Request\CurrentStatus* | *Firstred\PostNL\Entity\Request\CurrentStatusByReference*)

Returns *Firstred\PostNL\Entity\Response\CurrentStatusResponse*

Throws *Firstred\PostNL\Exception\CifDownException*

Throws *Firstred\PostNL\Exception\CifException*

Throws *Firstred\PostNL\Exception\HttpClientException*

Throws *Firstred\PostNL\Exception\NotSupportedException*

Throws *Firstred\PostNL\Exception\InvalidArgumentException*

Throws *Firstred\PostNL\Exception\ResponseException*

Throws *Firstred\PostNL\Exception\NotFoundException*

Throws *Firstred\PostNL\Exception\CifDownException*

Throws *Firstred\PostNL\Exception\CifException*

Throws *Firstred\PostNL\Exception\HttpClientException*

Throws *Firstred\PostNL\Exception\NotSupportedException*

Throws *Firstred\PostNL\Exception\InvalidArgumentException*

Throws *Firstred\PostNL\Exception\ResponseException*

Throws *Firstred\PostNL\Exception\NotFoundException*

Throws *Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Since 1.0.0

Deprecated 1.4.0 Use ``currentStatus`` instead

```
public Firstred\PostNL\Service\ShippingStatusService::currentStatusesREST($currentStatuses)
```

Get current statuses REST.

Parameters

- **\$currentStatuses** (*Firstred\PostNL\Entity\Request\CurrentStatus[]* | *\Firstred\PostNL\Entity\Request\CurrentStatusByReference[]*)

Returns *\Firstred\PostNL\Entity\Response\CurrentStatusResponse[]*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Since 1.2.0

Deprecated 1.4.0 Use `currentStatuses` instead

public *Firstred\PostNL\Service\ShippingStatusService::completeStatusREST(\$completeStatus)*

Gets the complete status.

This is a combi-function, supporting the following:

- CurrentStatus (by barcode):
 - Fill the Shipment->Barcode property. Leave the rest empty.
- CurrentStatusByReference:
 - Fill the Shipment->Reference property. Leave the rest empty.

Parameters

- **\$completeStatus** (*Firstred\PostNL\Entity\Request\CompleteStatus* | *\Firstred\PostNL\Entity\Request\CompleteStatusByReference*)

Returns *\Firstred\PostNL\Entity\Response\CompleteStatusResponse*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Since 1.0.0

Deprecated 1.4.0 Use ``completeStatus`` instead

public `Firstred\PostNL\Service\ShippingStatusService::completeStatusesREST($completeStatuses)`

Get complete statuses REST.

Parameters

- **\$completeStatuses** (`Firstred\PostNL\Entity\Request\CompleteStatus[]` | `\Firstred\PostNL\Entity\Request\CompleteStatusByReference[]`)

Returns `\Firstred\PostNL\Entity\Response\CompleteStatusResponse[]`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Since 1.2.0

Deprecated 1.4.0 Use ``completeStatuses`` instead

public `Firstred\PostNL\Service\ShippingStatusService::getSignatureREST($getSignature)`

Gets the signature.

Parameters

- **\$getSignature** (`Firstred\PostNL\Entity\Request\GetSignature`)

Returns `\Firstred\PostNL\Entity\Response\GetSignatureResponseSignature`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Since 1.0.0

Deprecated 1.4.0 Use ``getSignature`` instead

public *Firstred\PostNL\Service\ShippingStatusService::getSignaturesREST(\$getSignatures)*

Get multiple signatures.

Parameters

- **\$getSignatures** (*Firstred\PostNL\Entity\Request\GetSignature[]*)

Returns *\Firstred\PostNL\Entity\Response\GetSignatureResponseSignature[]*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Since 1.2.0

Deprecated 1.4.0 Use ``getSignatures`` instead

public *Firstred\PostNL\Service\ShippingStatusService::buildCurrentStatusRequestREST(\$currentStatus)*

Build the CurrentStatus request for the REST API.

This function auto-detects and adjusts the following requests:

- CurrentStatus
- CurrentStatusByReference

Parameters

- **\$currentStatus** (*Firstred\PostNL\Entity\Request\CurrentStatus* | *Firstred\PostNL\Entity\Request\CurrentStatusByReference*)

Returns *\Psr\Http\Message\RequestInterface*

Since 1.0.0

Deprecated 1.4.0

```
public Firstred\PostNL\Service\ShippingStatusService::processCurrentStatusResponseREST($response)
```

Process CurrentStatus Response REST.

Parameters

- **\$response** (mixed)

Returns *\Firstred\PostNL\Entity\Response\CurrentStatusResponse*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Since 1.0.0

Deprecated 1.4.0

```
public Firstred\PostNL\Service\ShippingStatusService::buildCompleteStatusRequestREST($completeStatus)
```

Build the CompleteStatus request for the REST API.

This function auto-detects and adjusts the following requests:

- CompleteStatus

- CompleteStatusByReference
- CompleteStatusByPhase
- CompleteStatusByStatus

Parameters

- **\$completeStatus** (*Firstred\PostNL\Entity\Request\CompleteStatus*)

Returns \Psr\Http\Message\RequestInterface

Since 1.0.0

Deprecated 1.4.0

public Firstred\PostNL\Service\ShippingStatusService::processCompleteStatusResponseREST(*\$response*)

Process CompleteStatus Response REST.

Parameters

- **\$response** (mixed)

Returns *\Firstred\PostNL\Entity\Response\CompleteStatusResponse* | null

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Since 1.0.0

Deprecated 1.4.0

public Firstred\PostNL\Service\ShippingStatusService::buildGetSignatureRequestREST(*\$getSignature*)

Build the GetSignature request for the REST API.

Parameters

- **\$getSignature** (*Firstred\PostNL\Entity\Request\GetSignature*)

Returns \Psr\Http\Message\RequestInterface

Since 1.0.0

Deprecated 1.4.0

```
public Firstred\PostNL\Service\ShippingStatusService::processGetSignatureResponseREST($response)
```

Process GetSignature Response REST.

Parameters

- **\$response** (mixed)

Returns \Firstred\PostNL\Entity\Response\GetSignatureResponseSignature | null

Throws \Firstred\PostNL\Exception\ResponseException

Throws \Firstred\PostNL\Exception\HttpClientException

Throws \Firstred\PostNL\Exception\NotSupportedException

Throws \Firstred\PostNL\Exception\InvalidArgumentException

Throws \Firstred\PostNL\Exception\ResponseException

Throws \Firstred\PostNL\Exception\HttpClientException

Throws \Firstred\PostNL\Exception\NotSupportedException

Throws \Firstred\PostNL\Exception\InvalidArgumentException

Throws \Firstred\PostNL\Exception\ResponseException

Throws \Firstred\PostNL\Exception\HttpClientException

Throws \Firstred\PostNL\Exception\NotSupportedException

Throws \Firstred\PostNL\Exception\InvalidArgumentException

Throws \Firstred\PostNL\Exception\ResponseException

Throws \Firstred\PostNL\Exception\HttpClientException

Throws \Firstred\PostNL\Exception\NotSupportedException

Throws \Firstred\PostNL\Exception\InvalidArgumentException

Since 1.0.0

Deprecated 1.4.0

```
public Firstred\PostNL\Service\ShippingStatusService::getUpdatedShipmentsREST($customer,
                                                                              $date-
                                                                              Time-
                                                                              From=null,
                                                                              $date-
                                                                              TimeTo=null)
```

Get updated shipments for customer REST.

Parameters

- **\$customer** (Firstred\PostNL\Entity\Customer)
- **\$dateTimeFrom** (DateTimeInterface | null)
- **\$dateTimeTo** (DateTimeInterface | null)

Returns \Firstred\PostNL\Entity\Response\UpdatedShipmentsResponse[]

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\NotFoundException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\NotFoundException*
Since 1.2.0
Deprecated 1.4.0

```

public Firstred\PostNL\Service\ShippingStatusService::buildGetUpdatedShipmentsRequestREST($customer,
                                                                                          $date-
                                                                                          Time-
                                                                                          From=null,
                                                                                          $date-
                                                                                          TimeTo=null
  
```

Build get updated shipments request REST.

Parameters

- **\$customer** (*Firstred\PostNL\Entity\Customer*)
- **\$dateTimeFrom** (DateTimeInterface | null)
- **\$dateTimeTo** (DateTimeInterface | null)

Returns *\Psr\Http\Message\RequestInterface*

Since 1.2.0

Deprecated 1.4.0

```

public Firstred\PostNL\Service\ShippingStatusService::processGetUpdatedShipmentsResponseREST($response
  
```

Process updated shipments response REST.

Parameters

- **\$response** (*\Psr\Http\Message\ResponseInterface*)

Returns *\Firstred\PostNL\Entity\Response\UpdatedShipmentsResponse[]*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Since 1.2.0
Deprecated 1.4.0

LabellingService

class `Firstred\PostNL\Service\LabellingService`

Class LabellingService.

Parent `Firstred\PostNL\Service\AbstractService`
Implements `Firstred\PostNL\Service\LabellingServiceInterface`

Summary

Methods

- `public generateLabelREST($generateLabel, $confirm)`
- `public generateLabelsREST($generateLabels)`
- `public generateLabelSOAP($generateLabel, $confirm)`
- `public generateLabelsSOAP($generateLabels)`
- `public buildGenerateLabelRequestREST($generateLabel, $confirm)`
- `public processGenerateLabelResponseREST($response)`
- `public buildGenerateLabelRequestSOAP($generateLabel, $confirm)`
- `public processGenerateLabelResponseSOAP($response)`

Constants

VERSION = `\'2\.2\'`
LIVE_ENDPOINT = `\'https://api\.postnl\.nl/shipment/v2\_2/label\'`
SANDBOX_ENDPOINT = `\'https://api\-sandbox\.postnl\.nl/shipment/v2\_2/label\'`
SOAP_ACTION = `\'http://postnl\.nl/cif/services/LabellingWebService/ILabellingWebService/GenerateLabel\'`
SOAP_ACTION_NO_CONFIRM = `\'http://postnl\.nl/cif/services/LabellingWebService/ILabellingWebService/GenerateLabelWithoutConfirm\'`

```
SERVICES_NAMESPACE = \'http://postnl\.nl/cif/services/LabellingWebService/\'  
DOMAIN_NAMESPACE = \'http://postnl\.nl/cif/domain/LabellingWebService/\'
```

Properties

```
public property Firstred\PostNL\Service\LabellingService::$namespaces
```

Namespaces uses for the SOAP version of this service.

Type array

```
private property Firstred\PostNL\Service\LabellingService::$insuranceProductCodes
```

Methods

```
public Firstred\PostNL\Service\LabellingService::generateLabelREST($generateLabel,  
                                                                    $confirm=true)
```

Generate a single barcode via REST.

Parameters

- **\$generateLabel** (*Firstred\PostNL\Entity\Request\GenerateLabel*)
- **\$confirm** (bool)

Returns *\Firstred\PostNL\Entity\Response\GenerateLabelResponse*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Since 1.0.0
Deprecated 1.4.0 Use `\generateLabel` instead

public `Firstred\PostNL\Service\LabellingService::generateLabelsREST($generateLabels)`

Generate multiple labels at once.

Parameters

- **\$generateLabels** (array) [`'uuid'` => [`GenerateBarcode`, `confirm`], ...]

Returns array

Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Since 1.0.0

Deprecated 1.4.0 Use ``generateLabels`` instead

```
public Firstred\PostNL\Service\LabellingService::generateLabelSOAP($generateLabel,  
                                                                    $confirm=true)
```

Generate a single label via SOAP.

Parameters

- **\$generateLabel** (*Firstred\PostNL\Entity\Request\GenerateLabel*)
- **\$confirm** (bool)

Returns *\Firstred\PostNL\Entity\Response\GenerateLabelResponse*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Since 1.0.0

Deprecated 1.4.0 Use ``generateLabels`` instead

```
public Firstred\PostNL\Service\LabellingService::generateLabelsSOAP($generateLabels)
```

Generate multiple labels at once via SOAP.

Parameters

- **\$generateLabels** (array) [`'uuid'` => [`GenerateBarcode`, `confirm`], ...]

Returns array

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Since 1.0.0
Deprecated 1.4.0 Use ``generateLabels`` instead

```

public Firstred\PostNL\Service\LabellingService::buildGenerateLabelRequestREST($generateLabel,
                                                                    $confirm=true)

```

Build the GenerateLabel request for the REST API.

Parameters

- **\$generateLabel** (`Firstred\PostNL\Entity\Request\GenerateLabel`)
- **\$confirm** (bool)

Returns `\Psr\Http\Message\RequestInterface`

Since 1.0.0

Deprecated 1.4.0

```

public Firstred\PostNL\Service\LabellingService::processGenerateLabelResponseREST($response)

```

Process the GenerateLabel REST Response.

Parameters

- **\$response** (Psr\Http\Message\ResponseInterface)

Returns \Firstred\PostNL\Entity\Response\GenerateLabelResponse | null

Throws \Firstred\PostNL\Exception\ResponseException

Throws \Firstred\PostNL\Exception\HttpClientException

Throws \Firstred\PostNL\Exception\NotSupportedException

Throws \Firstred\PostNL\Exception\InvalidArgumentException

Throws \Firstred\PostNL\Exception\ResponseException

Throws \Firstred\PostNL\Exception\HttpClientException

Throws \Firstred\PostNL\Exception\NotSupportedException

Throws \Firstred\PostNL\Exception\InvalidArgumentException

Throws \Firstred\PostNL\Exception\ResponseException

Throws \Firstred\PostNL\Exception\HttpClientException

Throws \Firstred\PostNL\Exception\NotSupportedException

Throws \Firstred\PostNL\Exception\InvalidArgumentException

Throws \Firstred\PostNL\Exception\ResponseException

Throws \Firstred\PostNL\Exception\HttpClientException

Throws \Firstred\PostNL\Exception\NotSupportedException

Throws \Firstred\PostNL\Exception\InvalidArgumentException

Since 1.0.0

```
public Firstred\PostNL\Service\LabellingService::buildGenerateLabelRequestSOAP($generateLabel,  
                                                                              $confirm=  
                                                                              true)
```

Build the GenerateLabel request for the SOAP API.

Parameters

- **\$generateLabel** (Firstred\PostNL\Entity\Request\GenerateLabel)
- **\$confirm** (bool)

Returns \Psr\Http\Message\RequestInterface

Since 1.0.0

Deprecated 1.4.0

```
public Firstred\PostNL\Service\LabellingService::processGenerateLabelResponseSOAP($response)
```

Parameters

- **\$response** (Psr\Http\Message\ResponseInterface)

Returns \Firstred\PostNL\Entity\Response\GenerateLabelResponse

Throws \Firstred\PostNL\Exception\CifDownException

Throws \Firstred\PostNL\Exception\CifException

Throws \Firstred\PostNL\Exception\ResponseException

Throws \Firstred\PostNL\Exception\HttpClientException

Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Since 1.0.0
Deprecated 1.4.0

ConfirmingService

class *Firstred\PostNL\Service\ConfirmingService*

Class *ConfirmingService*.

Parent *Firstred\PostNL\Service\AbstractService*

Implements *Firstred\PostNL\Service\ConfirmingServiceInterface*

Summary

Methods

- *public confirmShipmentREST(\$confirming)*
- *public confirmShipmentsREST(\$confirms)*
- *public confirmShipmentSOAP(\$confirming)*
- *public confirmShipmentsSOAP(\$confirmings)*
- *public buildConfirmRequestREST(\$confirming)*
- *public processConfirmResponseREST(\$response)*
- *public buildConfirmRequestSOAP(\$confirming)*
- *public processConfirmResponseSOAP(\$response)*

Constants

```

VERSION = \'2\.\0\'
LIVE_ENDPOINT = \'https://api\.\postnl\.\nl/shipment/v2/confirm\'
SANDBOX_ENDPOINT = \'https://api\-\sandbox\.\postnl\.\nl/shipment/v2/confirm\'
SOAP_ACTION = \'http://postnl\.\nl/cif/services/ConfirmingWebService/
IConfirmingWebService/Confirming\'
ENVELOPE_NAMESPACE = \'http://schemas\.\xmlsoap\.\org/soap/envelope/\''
SERVICES_NAMESPACE = \'http://postnl\.\nl/cif/services/ConfirmingWebService/\''
DOMAIN_NAMESPACE = \'http://postnl\.\nl/cif/domain/ConfirmingWebService/\''

```

Properties

```
public property Firstred\PostNL\Service\ConfirmingService::$namespaces
```

Namespaces uses for the SOAP version of this service.

Type array

Methods

```
public Firstred\PostNL\Service\ConfirmingService::confirmShipmentREST($confirming)
```

Confirm a single shipment via REST.

Parameters

- **\$confirming** (*Firstred\PostNL\Entity\Request\Confirming*)

Returns *Firstred\PostNL\Entity\Response\ConfirmingResponseShipment*

Throws *Firstred\PostNL\Exception\CifDownException*

Throws *Firstred\PostNL\Exception\CifException*

Throws *Firstred\PostNL\Exception\ResponseException*

Throws *Firstred\PostNL\Exception\HttpClientException*

Throws *Firstred\PostNL\Exception\NotSupportedException*

Throws *Firstred\PostNL\Exception\InvalidArgumentException*

Throws *Firstred\PostNL\Exception\CifDownException*

Throws *Firstred\PostNL\Exception\CifException*

Throws *Firstred\PostNL\Exception\ResponseException*

Throws *Firstred\PostNL\Exception\HttpClientException*

Throws *Firstred\PostNL\Exception\NotSupportedException*

Throws *Firstred\PostNL\Exception\InvalidArgumentException*

Throws *Firstred\PostNL\Exception\CifDownException*

Throws *Firstred\PostNL\Exception\CifException*

Throws *Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Since 1.0.0

public *Firstred\PostNL\Service\ConfirmingService::confirmShipmentsREST*(\$confirms)

Confirm multiple shipments.

Parameters

- **\$confirms** (*Firstred\PostNL\Entity\Request\Confirming[]*) ['uuid' => Confirming, ...]

Returns *\Firstred\PostNL\Entity\Response\ConfirmingResponseShipment[]*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Since 1.0.0

public Firstred\PostNL\Service\ConfirmingService::confirmShipmentSOAP(*\$confirming*)

Generate a single label via SOAP.

Parameters

- **\$confirming** (*Firstred\PostNL\Entity\Request\Confirming*)

Returns *\Firstred\PostNL\Entity\Response\ConfirmingResponseShipment*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Since 1.0.0

Deprecated 1.4.0

public Firstred\PostNL\Service\ConfirmingService::confirmShipmentsSOAP(*\$confirmings*)

Generate multiple labels at once.

Parameters

- *\$confirmings* (array) ['uuid' => Confirming, ...]

Returns *\Firstred\PostNL\Entity\Response\ConfirmingResponseShipment[]*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Since 1.0.0

Deprecated 1.4.0

public `Firstred\PostNL\Service\ConfirmingService::buildConfirmRequestREST($confirming)`

Parameters

- **\$confirming** (`Firstred\PostNL\Entity\Request\Confirming`)

Returns `\Psr\Http\Message\RequestInterface`

Since 1.0.0

public `Firstred\PostNL\Service\ConfirmingService::processConfirmResponseREST($response)`

Proces Confirm REST Response.

Parameters

- **\$response** (mixed)

Returns `\Firstred\PostNL\Entity\Response\ConfirmingResponseShipment[] | null`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\InvalidArgumentException`
Since 1.0.0

public Firstred\PostNL\Service\ConfirmingService::**buildConfirmRequestSOAP**(\$confirming)

Parameters

- **\$confirming** (`Firstred\PostNL\Entity\Request\Confirming`)

Returns `\Psr\Http\Message\RequestInterface`

Since 1.0.0

Deprecated 1.4.0

public Firstred\PostNL\Service\ConfirmingService::**processConfirmResponseSOAP**(\$response)

Process Confirm SOAP response.

Parameters

- **\$response** (`\Psr\Http\Message\ResponseInterface`)

Returns `\Firstred\PostNL\Entity\Response\ConfirmingResponseShipment`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Since 1.0.0

Deprecated 1.4.0

Util

`\Firstred\PostNL\Util`

Interfaces

XmlSerializable

interface `Firstred\PostNL\Util\XmlSerializable`

Objects implementing XmlSerializable can control how they are represented in Xml.

Summary

Methods

- `public xmlSerialize($writer)`

Methods

public `Firstred\PostNL\Util\XmlSerializable::xmlSerialize($writer)`

The xmlSerialize method is called during xml writing.

Use the \$writer argument to write its own xml serialization.

An important note: do `_not_` create a parent element. Any element implementing XmlSerializable should only ever write what's considered its 'inner xml'.

The parent of the current element is responsible for writing a containing element.

This allows serializers to be re-used for different element names.

If you are opening new elements, you must also close them again.

Parameters

- `$writer` (Sabre\Xml\Writer)

Returns void

Classes

PendingPromise

class Firstred\PostNL\Util\PendingPromise

Promises/A+ implementation that avoids recursion when possible.

Implements Http\Promise\Promise

Summary

Methods

- `public __construct($waitFn, $cancelFn)`
- `public then($onFulfilled, $onRejected)`
- `public otherwise($onRejected)`
- `public wait($unwrap)`
- `public getState()`
- `public cancel()`
- `public resolve($value)`
- `public reject($reason)`
- `private settle($state, $value)`
- `private static callHandler($index, $value, $handler)`
- `private waitIfPending()`
- `private invokeWaitFn()`
- `private invokeWaitList()`

Properties

```
private static property Firstred\PostNL\Util\PendingPromise::$state
private static property Firstred\PostNL\Util\PendingPromise::$result
private static property Firstred\PostNL\Util\PendingPromise::$cancelFn
private static property Firstred\PostNL\Util\PendingPromise::$waitFn
private static property Firstred\PostNL\Util\PendingPromise::$waitList
private static property Firstred\PostNL\Util\PendingPromise::$handlers
```

Methods

public Firstred\PostNL\Util\PendingPromise::__construct(*\$waitFn=null, \$cancelFn=null*)

Parameters

- **\$waitFn** (callable) fn that when invoked resolves the promise
- **\$cancelFn** (callable) fn that when invoked cancels the promise

public Firstred\PostNL\Util\PendingPromise::then(*\$onFulfilled=null, \$onRejected=null*)

Parameters

- **\$onFulfilled** (callable | null)
- **\$onRejected** (callable | null)

Returns [\Firstred\PostNL\Util\PendingPromise](#) | [\Http\Promise\Promise](#)

public Firstred\PostNL\Util\PendingPromise::otherwise(*\$onRejected*)

Parameters

- **\$onRejected** (callable)

Returns [\Firstred\PostNL\Util\PendingPromise](#) | [\Http\Promise\Promise](#)

public Firstred\PostNL\Util\PendingPromise::wait(*\$unwrap=true*)

Parameters

- **\$unwrap** (bool)

Returns mixed | void

Throws [\Exception](#)

public Firstred\PostNL\Util\PendingPromise::getState()

Returns string

public Firstred\PostNL\Util\PendingPromise::cancel()

Returns void

public Firstred\PostNL\Util\PendingPromise::resolve(*\$value*)

Parameters

- **\$value** (mixed)

public Firstred\PostNL\Util\PendingPromise::reject(*\$reason*)

Parameters

- **\$reason** (mixed)

private Firstred\PostNL\Util\PendingPromise::settle(*\$state, \$value*)

Parameters

- **\$state** (string)

- **\$value** (mixed)

private static Firstred\PostNL\Util\PendingPromise::callHandler(\$index, \$value, \$handler)

Call a stack of handlers using a specific callback index and value.

Parameters

- **\$index** (int) 1 (resolve) or 2 (reject)
- **\$value** (mixed) value to pass to the callback
- **\$handler** (array) array of handler data (promise and callbacks)

Returns void returns the next group to resolve

private Firstred\PostNL\Util\PendingPromise::waitIfPending()

Throws \Exception

Returns void

private Firstred\PostNL\Util\PendingPromise::invokeWaitFn()

Throws \Exception

private Firstred\PostNL\Util\PendingPromise::invokeWaitList()

Throws \Exception

UUID

class Firstred\PostNL\Util\UUID

Class UUID.

Summary

Methods

- *public static generate()*

Methods

public static Firstred\PostNL\Util\UUID::generate()

Generate a v4 UUID in RFC 4122 format.

Returns string

PromiseTool

class Firstred\PostNL\Util\PromiseTool

Class PromiseTool.

Summary

Methods

- *public static queue(\$assign)*
- *public static task(\$task)*
- *public static promiseFor(\$value)*
- *public static rejectionFor(\$reason)*
- *public static exceptionFor(\$reason)*
- *public static iterFor(\$value)*
- *public static inspect(\$promise)*
- *public static inspectAll(\$promises)*
- *public static unwrap(\$promises)*
- *public static all(\$promises, \$recursive)*
- *public static some(\$count, \$promises)*
- *public static any(\$promises)*
- *public static settle(\$promises)*
- *public static each(\$iterable, \$onFulfilled, \$onRejected)*
- *public static eachLimit(\$iterable, \$concurrency, \$onFulfilled, \$onRejected)*
- *public static eachLimitAll(\$iterable, \$concurrency, \$onFulfilled)*
- *public static isFulfilled(\$promise)*
- *public static isRejected(\$promise)*
- *public static isSettled(\$promise)*

Methods

public static Firstred\PostNL\Util\PromiseTool::**queue**(\$assign=null)

Get the global task queue used for promise resolution.

This task queue **MUST** be run in an event loop in order for promises to be settled asynchronously. It will be automatically run when synchronously waiting on a promise.

```
<code>
while ($eventLoop->isRunning()) {
    queue()->run();
}
```

```
}  
</code>
```

Parameters

- **\$assign** (*Firstred\PostNL\Util\TaskQueue*) optionally specify a new queue instance

Returns *\Firstred\PostNL\Util\TaskQueue*

```
public static Firstred\PostNL\Util\PromiseTool::task($task)
```

Adds a function to run in the task queue when it is next `run()` and returns a promise that is fulfilled or rejected with the result.

Parameters

- **\$task** (callable) task function to run

Returns *\Http\Promise\Promise*

```
public static Firstred\PostNL\Util\PromiseTool::promiseFor($value)
```

Creates a promise for a value if the value is not a promise.

Parameters

- **\$value** (mixed) promise or value

Returns *\Http\Promise\Promise*

```
public static Firstred\PostNL\Util\PromiseTool::rejectionFor($reason)
```

Creates a rejected promise for a reason if the reason is not a promise. If the provided reason is a promise, then it is returned as-is.

Parameters

- **\$reason** (mixed) promise or reason

Returns *\Http\Promise\Promise*

```
public static Firstred\PostNL\Util\PromiseTool::exceptionFor($reason)
```

Create an exception for a rejected promise value.

Parameters

- **\$reason** (mixed)

Returns *\Firstred\PostNL\Util\Throwable*

```
public static Firstred\PostNL\Util\PromiseTool::iterFor($value)
```

Returns an iterator for the given value.

Parameters

- **\$value** (mixed)

Returns *\Iterator*

```
public static Firstred\PostNL\Util\PromiseTool::inspect($promise)
```

Synchronously waits on a promise to resolve and returns an inspection state array.

Returns a state associative array containing a “state” key mapping to a valid promise state. If the state of the promise is “fulfilled”, the array will contain a “value” key mapping to the fulfilled value of the promise. If the promise is rejected, the array will contain a “reason” key mapping to the rejection reason of the promise.

Parameters

- **\$promise** (Http\Promise\Promise) promise or value

Returns array

Throws \Exception

```
public static Firstred\PostNL\Util\PromiseTool::inspectAll($promises)
```

Waits on all of the provided promises, but does not unwrap rejected promises as thrown exception.

Returns an array of inspection state arrays.

Parameters

- **\$promises** (Http\Promise\Promise[]) traversable of promises to wait upon

Returns array

Throws \Exception

Throws \Exception

Throws \Exception

Throws \Exception

```
public static Firstred\PostNL\Util\PromiseTool::unwrap($promises)
```

Waits on all of the provided promises and returns the fulfilled values.

Returns an array that contains the value of each promise (in the same order the promises were provided). An exception is thrown if any of the promises are rejected.

Parameters

- **\$promises** (mixed) iterable of Promise objects to wait on

Returns array

Throws \Exception on error

Throws \Firstred\PostNL\Util\Throwable on error in PHP >=7

Throws `\Exception` on error

Throws `\Firstred\PostNL\Util\Throwable` on error in PHP ≥ 7

public static `Firstred\PostNL\Util\PromiseTool::all($promises, $recursive=false)`

Given an array of promises, return a promise that is fulfilled when all the items in the array are fulfilled.

The promise's fulfillment value is an array with fulfillment values at respective positions to the original array. If any promise in the array rejects, the returned promise is rejected with the rejection reason.

Parameters

- **\$promises** (mixed) promises or values
- **\$recursive** (bool) - If true, resolves new promises that might have been added to the stack during its own resolution

Returns `\Http\Promise\Promise`

public static `Firstred\PostNL\Util\PromiseTool::some($count, $promises)`

Initiate a competitive race between multiple promises or values (values will become immediately fulfilled promises).

When count amount of promises have been fulfilled, the returned promise is fulfilled with an array that contains the fulfillment values of the winners in order of resolution.

Parameters

- **\$count** (int) total number of promises
- **\$promises** (mixed) promises or values

Returns `\Http\Promise\Promise`

public static `Firstred\PostNL\Util\PromiseTool::any($promises)`

Like `some()`, with 1 as count. However, if the promise fulfills, the fulfillment value is not an array of 1 but the value directly.

Parameters

- **\$promises** (mixed) promises or values

Returns `\Http\Promise\Promise`

public static `Firstred\PostNL\Util\PromiseTool::settle($promises)`

Returns a promise that is fulfilled when all of the provided promises have been fulfilled or rejected.

The returned promise is fulfilled with an array of inspection state arrays.

Parameters

- **\$promises** (mixed) promises or values

Returns `\Http\Promise\Promise`

```
public static Firstred\PostNL\Util\PromiseTool::each($iterable, $onFulfilled=null,  
                                                    $onRejected=null)
```

Given an iterator that yields promises or values, returns a promise that is fulfilled with a null value when the iterator has been consumed or the aggregate promise has been fulfilled or rejected.

\$onFulfilled is a function that accepts the fulfilled value, iterator index, and the aggregate promise. The callback can invoke any necessary side effects and choose to resolve or reject the aggregate promise if needed.

\$onRejected is a function that accepts the rejection reason, iterator index, and the aggregate promise. The callback can invoke any necessary side effects and choose to resolve or reject the aggregate promise if needed.

Parameters

- **\$iterable** (mixed) iterator or array to iterate over
- **\$onFulfilled** (callable)
- **\$onRejected** (callable)

Returns `\Http\Promise\Promise`

```
public static Firstred\PostNL\Util\PromiseTool::eachLimit($iterable, $concurrency,  
                                                         $onFulfilled=null,  
                                                         $onRejected=null)
```

Like each, but only allows a certain number of outstanding promises at any given time.

\$concurrency may be an integer or a function that accepts the number of pending promises and returns a numeric concurrency limit value to allow for dynamic a concurrency size.

Parameters

- **\$iterable** (mixed)
- **\$concurrency** (int | callable)
- **\$onFulfilled** (callable)
- **\$onRejected** (callable)

Returns `\Http\Promise\Promise`

```
public static Firstred\PostNL\Util\PromiseTool::eachLimitAll($iterable, $concurrency,  
                                                             $onFulfilled=null)
```

Like `each_limit`, but ensures that no promise in the given `$iterable` argument is rejected. If any promise is rejected, then the aggregate promise is rejected with the encountered rejection.

Parameters

- **`$iterable`** (mixed)
- **`$concurrency`** (int | callable)
- **`$onFulfilled`** (callable)

Returns `\Http\Promise\Promise`

```
public static Firstred\PostNL\Util\PromiseTool::isFulfilled($promise)
```

Returns true if a promise is fulfilled.

Parameters

- **`$promise`** (`\Http\Promise\Promise`)

Returns `bool`

```
public static Firstred\PostNL\Util\PromiseTool::isRejected($promise)
```

Returns true if a promise is rejected.

Parameters

- **`$promise`** (`\Http\Promise\Promise`)

Returns `bool`

```
public static Firstred\PostNL\Util\PromiseTool::isSettled($promise)
```

Returns true if a promise is fulfilled or rejected.

Parameters

- **`$promise`** (`\Http\Promise\Promise`)

Returns `bool`

TaskQueue

```
class Firstred\PostNL\Util\TaskQueue
```

A task queue that executes tasks in a FIFO order.

This task queue class is used to settle promises asynchronously and maintains a constant stack size. You can use the task queue asynchronously by calling the `run()` function of the global task queue in an event loop.

```
queue()->run();
```

Summary

Methods

- `public __construct($withShutdown)`
- `public isEmpty()`
- `public add($task)`
- `public run()`
- `public disableShutdown()`

Properties

private static property Firstred\PostNL\Util\TaskQueue::\$enableShutdown

private static property Firstred\PostNL\Util\TaskQueue::\$queue

Methods

public Firstred\PostNL\Util\TaskQueue::__construct(*\$withShutdown=true*)

TaskQueue constructor.

Parameters

- **\$withShutdown** (bool)

public Firstred\PostNL\Util\TaskQueue::isEmpty()

Returns bool

public Firstred\PostNL\Util\TaskQueue::add(*\$task*)

Parameters

- **\$task** (callable)

public Firstred\PostNL\Util\TaskQueue::run()

Returns void

public Firstred\PostNL\Util\TaskQueue::disableShutdown()

The task queue will be run and exhausted by default when the process exits IFF the exit is not the result of a PHP E_ERROR error.

You can disable running the automatic shutdown of the queue by calling this function. If you disable the task queue shutdown process, then you **MUST** either run the task queue (as a result of running your event loop or manually using the run() method) or wait on each outstanding promise.

Note: This shutdown will occur before any destructors are triggered.

RFPdi

```
class Firstred\PostNL\Util\RFPdi
```

Class RFPdi.

Parent setasign\Fpdi\Fpdi

Summary

Methods

- *public rotate(\$angle, \$x, \$y)*
- *public rotateClockWise()*
- *public rotateCounterClockWise()*
- *public _endpage()*

Properties

```
public static property Firstred\PostNL\Util\RFPdi::$angle
```

Methods

```
public Firstred\PostNL\Util\RFPdi::rotate($angle, $x=-1, $y=-1)
public Firstred\PostNL\Util\RFPdi::rotateClockWise()
public Firstred\PostNL\Util\RFPdi::rotateCounterClockWise()
public Firstred\PostNL\Util\RFPdi::_endpage()
```

EachPromise

```
class Firstred\PostNL\Util\EachPromise
```

Represents a promise that iterates over many promises and invokes side-effect functions in the process.

Summary

Methods

- *public __construct(\$iterable, \$config)*
- *public promise()*
- *private createPromise()*
- *private refillPending()*
- *private addPending()*
- *private advanceIterator()*

- `private step($idx)`
- `private checkIfFinished()`

Constants

```
PENDING = \'pending\'
FULFILLED = \'fulfilled\'
REJECTED = \'rejected\'
```

Properties

```
private static property Firstred\PostNL\Util\EachPromise::$pending
private static property Firstred\PostNL\Util\EachPromise::$iterable
    Type \Iterator
private static property Firstred\PostNL\Util\EachPromise::$concurrency
    Type callable|int
private static property Firstred\PostNL\Util\EachPromise::$onFulfilled
    Type callable
private static property Firstred\PostNL\Util\EachPromise::$onRejected
    Type callable
private static property Firstred\PostNL\Util\EachPromise::$aggregate
    Type \Http\Promise\Promise
private static property Firstred\PostNL\Util\EachPromise::$mutex
    Type bool
```

Methods

```
public Firstred\PostNL\Util\EachPromise::__construct( $iterable, $config=[])
```

Configuration hash can include the following key value pairs:.

- fulfilled: (callable) Invoked when a promise fulfills. The function is invoked with three arguments: the fulfillment value, the index position from the iterable list of the promise, and the aggregate promise that manages all of the promises. The aggregate promise may be resolved from within the callback to short-circuit the promise.
- rejected: (callable) Invoked when a promise is rejected. The function is invoked with three arguments: the rejection reason, the index position from the iterable list of the promise, and the aggregate promise that manages all of the promises. The aggregate promise may be resolved from within the callback to short-circuit the promise.
- concurrency: (integer) Pass this configuration option to limit the allowed number of outstanding concurrently executing promises,

creating a capped pool of promises. There is no limit by default.

Parameters

- **\$iterable** (mixed) promises or values to iterate
- **\$config** (array) Configuration options

```
public Firstred\PostNL\Util\EachPromise::promise()
```

Returns \Http\Promise\Promise

```
private Firstred\PostNL\Util\EachPromise::createPromise()
```

Returns void

```
private Firstred\PostNL\Util\EachPromise::refillPending()
```

Returns void

```
private Firstred\PostNL\Util\EachPromise::addPending()
```

Returns bool

```
private Firstred\PostNL\Util\EachPromise::advanceIterator()
```

Returns bool

```
private Firstred\PostNL\Util\EachPromise::step($idx)
```

Parameters

- **\$idx** (mixed)

```
private Firstred\PostNL\Util\EachPromise::checkIfFinished()
```

Returns bool

Util

```
class Firstred\PostNL\Util\Util
```

Class Util.

Summary

Methods

- *public static urlencode(\$arr, \$prefix)*
- *public static getPdfSizeAndOrientation(\$pdf)*
- *public static getDeliveryDate(\$deliveryDate, \$mondayDelivery, \$sundayDelivery)*
- *public static getShippingDate(\$deliveryDate, \$days)*
- *public static getShippingDaysRemaining(\$shippingDate, \$preferredDeliveryDate)*

- *protected static* `getHolidaysForYear($year)`
- *public static* `compareGuzzleVersion($a, $b)`

Constants

`ERROR_MARGIN = 2`

Methods

public static `Firstred\PostNL\Util\Util::urlEncode($arr, $prefix=null)`

Parameters

- **\$arr** (array) a map of param keys to values
- **\$prefix** (string | null)

Returns string a querystring, essentially

public static `Firstred\PostNL\Util\Util::getPdfSizeAndOrientation($pdf)`

Parameters

- **\$pdf** (string) Raw PDF string

Returns array | false | string Returns an array with the dimensions or ISO size and orientation
The orientation is in FPDF format, so L for Landscape and P for Portrait Sizes are in mm

public static `Firstred\PostNL\Util\Util::getDeliveryDate($deliveryDate,
$mondayDelivery=false,
$sundayDelivery=false)`

Offline delivery date calculation.

Parameters

- **\$deliveryDate** (string) Delivery date in any format accepted by DateTime
- **\$mondayDelivery** (bool) Sunday sorting/Monday delivery enabled
- **\$sundayDelivery** (bool) Sunday delivery enabled

Returns string (format: `Y-m-d H:i:s`)

Throws `\Exception`

public static `Firstred\PostNL\Util\Util::getShippingDate($deliveryDate, $days=[0 => false,
1 => true, 2 => true, 3 => true, 4
=> true, 5 => true, 6 => true])`

Offline shipping date calculation.

Parameters

- **\$deliveryDate** (string)
- **\$days** (array)

Returns string

Throws `\Firstred\PostNL\Exception\InvalidArgumentException`

```
public static Firstred\PostNL\Util\Util::getShippingDaysRemaining($shippingDate,  
                                                                    $preferredDeliveryDate)
```

Calculates amount of days remaining

i.e. preferred delivery date the day tomorrow => today = 0

i.e. preferred delivery date the day after tomorrow => today + tomorrow = 1

i.e. preferred delivery date the day after tomorrow, but one holiday => today + holiday = 0.

0 means: should ship today

< 0 means: should've shipped in the past

anything higher means: you've got some more time

Parameters

- **\$shippingDate** (string) Shipping date (format: *Y-m-d H:i:s*)
- **\$preferredDeliveryDate** (string) Customer preference

Returns int

Throws \Exception

```
protected static Firstred\PostNL\Util\Util::getHolidaysForYear($year)
```

Get an array with all Dutch holidays for the given year.

Parameters

- **\$year** (string)

Returns array Credits to @tvlooy (<https://gist.github.com/tvlooy/1894247>)

```
public static Firstred\PostNL\Util\Util::compareGuzzleVersion($a, $b)
```

DummyLogger

```
class Firstred\PostNL\Util\DummyLogger
```

Class DummyLogger.

Implements Psr\Log\LoggerInterface

Summary

Methods

- *public emergency(\$message, \$context)*
- *public alert(\$message, \$context)*
- *public critical(\$message, \$context)*
- *public error(\$message, \$context)*
- *public warning(\$message, \$context)*
- *public notice(\$message, \$context)*

- `public info($message, $context)`
- `public debug($message, $context)`
- `public log($level, $message, $context)`

Methods

public Firstred\PostNL\Util\DummyLogger::**emergency**(*\$message*, *\$context*=\|/)

Parameters

- **\$message** (string)
- **\$context** (array)

public Firstred\PostNL\Util\DummyLogger::**alert**(*\$message*, *\$context*=\|/)

Parameters

- **\$message** (string)
- **\$context** (array)

public Firstred\PostNL\Util\DummyLogger::**critical**(*\$message*, *\$context*=\|/)

Parameters

- **\$message** (string)
- **\$context** (array)

public Firstred\PostNL\Util\DummyLogger::**error**(*\$message*, *\$context*=\|/)

Parameters

- **\$message** (string)
- **\$context** (array)

public Firstred\PostNL\Util\DummyLogger::**warning**(*\$message*, *\$context*=\|/)

Parameters

- **\$message** (string)
- **\$context** (array)

public Firstred\PostNL\Util\DummyLogger::**notice**(*\$message*, *\$context*=\|/)

Parameters

- **\$message** (string)
- **\$context** (array)

public Firstred\PostNL\Util\DummyLogger::**info**(*\$message*, *\$context*=\|/)

Parameters

- **\$message** (string)
- **\$context** (array)

```
public Firstred\PostNL\Util\DummyLogger::debug( $message, $context=[])
```

Parameters

- **\$message** (string)
- **\$context** (array)

```
public Firstred\PostNL\Util\DummyLogger::log( $level, $message, $context=[])
```

Parameters

- **\$level** (mixed)
- **\$message** (string)
- **\$context** (array)

Message

```
class Firstred\PostNL\Util\Message
```

Class Message.

Summary

Methods

- *public static str(\$message)*
- *public static parseResponse(\$message)*
- *private static parseMessage(\$message)*

Constants

```
RFC7230_HEADER_REGEX = "(^([^\(\)<>@,;:\\\\"/>
\
```

```
RFC7230_HEADER_FOLD_REGEX = "(\\r?\\n[ \\t\\+\\+\\+)"
```

Methods

```
public static Firstred\PostNL\Util\Message::str($message)
```

Returns the string representation of an HTTP message.

Parameters

- **\$message** (Psr\Http\Message\MessageInterface) message to convert to a string

Returns string

```
public static Firstred\PostNL\Util\Message::parseResponse($message)
```

Parses a response message string into a response object.

Parameters

- **\$message** (string) response message string

Returns `\Psr\Http\Message\ResponseInterface`

```
private static Firstred\PostNL\Util\Message::parseMessage($message)
```

Parses an HTTP message into an associative array.

The array contains the “start-line” key containing the start line of the message, “headers” key containing an associative array of header array values, and a “body” key containing the body of the message.

Parameters

- **\$message** (string) HTTP request or response to parse

Returns `array`**Traits****FlexibleEntityTrait**

```
trait Firstred\PostNL\Util\FlexibleEntityTrait
```

Trait FlexibleEntityTrait.

Methods

```
public Firstred\PostNL\Util\FlexibleEntityTrait::__call($name, $value)
```

Add additional properties.

Parameters

- **\$name** (string)
- **\$value** (mixed)

Returns `object | null`**Throws** `\Firstred\PostNL\Exception\InvalidArgumentException`

1.12.2 Classes

PostNL

```
class Firstred\PostNL\PostNL
```

Class PostNL.

Implements `Psr\Log\LoggerAwareInterface`

Summary

Methods

- `public __construct($customer, $apiKey, $sandbox, $mode)`
- `public setToken($apiKey)`
- `public getRestApiKey()`
- `public getApiKey()`
- `public getToken()`
- `public getCustomer()`
- `public setCustomer($customer)`
- `public getSandbox()`
- `public setSandbox($sandbox)`
- `public getMode()`
- `public setMode($mode)`
- `public getHttpClient()`
- `public setHttpClient($client)`
- `public getLogger()`
- `public setLogger($logger)`
- `public resetLogger()`
- `public getRequestFactory()`
- `public setRequestFactory($requestFactory)`
- `public getResponseFactory()`
- `public setResponseFactory($responseFactory)`
- `public getStreamFactory()`
- `public setStreamFactory($streamFactory)`
- `public getBarcodeService()`
- `public setBarcodeService($service)`
- `public getLabellingService()`
- `public setLabellingService($service)`
- `public getConfirmingService()`
- `public setConfirmingService($service)`
- `public getShippingStatusService()`
- `public setShippingStatusService($service)`
- `public getDeliveryDateService()`
- `public setDeliveryDateService($service)`
- `public getTimeframeService()`
- `public setTimeframeService($service)`
- `public getLocationService()`
- `public setLocationService($service)`

- `public getShippingService()`
- `public setShippingService($service)`
- `public generateBarcode($type, $range, $serie, $seps)`
- `public generateBarcodeByCountryCode($iso)`
- `public generateBarcodesByCountryCodes($isos)`
- `public sendShipment($shipment, $printertype, $confirm)`
- `public sendShipments($shipments, $printertype, $confirm, $merge, $format, $positions, $a60orientation)`
- `public generateLabel($shipment, $printertype, $confirm)`
- `public generateLabels($shipments, $printertype, $confirm, $merge, $format, $positions, $a60orientation)`
- `public confirmShipment($shipment)`
- `public confirmShipments($shipments)`
- `public getCurrentStatus($currentStatus)`
- `public getShippingStatusByBarcode($barcode, $complete)`
- `public getShippingStatusesByBarcodes($barcodes, $complete)`
- `public getShippingStatusByReference($reference, $complete)`
- `public getShippingStatusesByReferences($references, $complete)`
- `public getCompleteStatus($completeStatus)`
- `public getUpdatedShipments($dateTimeFrom, $dateTimeTo)`
- `public getSignature($signature)`
- `public getSignatureByBarcode($barcode)`
- `public getSignaturesByBarcodes($barcodes)`
- `public getDeliveryDate($getDeliveryDate)`
- `public getSentDate($getSentDate)`
- `public getTimeframes($getTimeframes)`
- `public getNearestLocations($getNearestLocations)`
- `public getTimeframesAndNearestLocations($getTimeframes, $getNearestLocations, $getDeliveryDate)`
- `public getLocationsInArea($getLocationsInArea)`
- `public getLocation($getLocation)`
- `public findBarcodeSerie($type, $range, $seps)`
- `private checkEnvironment()`
- `public static triggerDeprecation($package, $version, $message, $args)`

Constants

MODE_REST = 1

Deprecated 1.4.0

MODE_SOAP = 2

Deprecated 1.4.0

MODE_LEGACY = 2

Deprecated 1.4.0

Properties

public property Firstred\PostNL\PostNL::\$threeSCountries

3S (or EU Pack Special) countries.

Type array

public property Firstred\PostNL\PostNL::\$a6positions

A6 positions

(index = amount of a6 left on the page).

Type array

public static property Firstred\PostNL\PostNL::\$verifySslCerts

Verify SSL certificate of the PostNL REST API.

Type bool

Deprecated

protected static property Firstred\PostNL\PostNL::\$apiKey

The PostNL REST API key or SOAP username/password to be used for requests.

In case of REST the API key is the ``Password`` property of the ``UsernameToken``

In case of SOAP this has to be a ``UsernameToken`` object, with the following requirements:

- Do not pass a username (``null``)

And pass the plaintext password.

Type string

protected static property Firstred\PostNL\PostNL::\$customer

The PostNL Customer to be used for requests.

Type *\Firstred\PostNL\Entity\Customer*

protected static property Firstred\PostNL\PostNL::\$sandbox

Sandbox mode.

Type bool

protected static property Firstred\PostNL\PostNL::\$httpClient

Type *\Firstred\PostNL\HttpClient\ClientInterface*

protected static property Firstred\PostNL\PostNL::\$logger

Type *\Psr\Log\LoggerInterface*

protected static property Firstred\PostNL\PostNL::\$requestFactory

Type *\Psr\Http\Message\RequestFactoryInterface* | *\Firstred\PostNL\Factory\RequestFactoryInterface*

protected static property Firstred\PostNL\PostNL::\$responseFactory

Type *\Psr\Http\Message\ResponseFactoryInterface* | *\Firstred\PostNL\Factory\ResponseFactoryInterface*

protected static property Firstred\PostNL\PostNL::\$streamFactory

Type *\Psr\Http\Message\StreamFactoryInterface* | *\Firstred\PostNL\Factory\StreamFactoryInterface*

protected static property Firstred\PostNL\PostNL::\$mode

This is the current mode.

Type int

protected static property Firstred\PostNL\PostNL::\$barcodeService

Type *\Firstred\PostNL\Service\BarcodeServiceInterface*

protected static property Firstred\PostNL\PostNL::\$labellingService

Type *\Firstred\PostNL\Service\LabellingServiceInterface*

protected static property Firstred\PostNL\PostNL::\$confirmingService

Type *\Firstred\PostNL\Service\ConfirmingServiceInterface*

protected static property Firstred\PostNL\PostNL::\$shippingStatusService

Type *\Firstred\PostNL\Service\ShippingStatusServiceInterface*

protected static property Firstred\PostNL\PostNL::\$deliveryDateService

Type *\Firstred\PostNL\Service\DeliveryDateServiceInterface*

protected static property Firstred\PostNL\PostNL::\$timeframeService

Type *\Firstred\PostNL\Service\TimeframeServiceInterface*

protected static property Firstred\PostNL\PostNL::\$locationService

Type *\Firstred\PostNL\Service\LocationServiceInterface*

protected static property Firstred\PostNL\PostNL::\$shippingService

Type *\Firstred\PostNL\Service\ShippingServiceInterface*

Methods

```
public Firstred\PostNL\PostNL::__construct($customer, $apiKey, $sandbox, $mode=null)
```

PostNL constructor.

Parameters

- **\$customer** (*Firstred\PostNL\Entity\Customer*) Customer object.
- **\$apiKey** (*Firstred\PostNL\Entity\SOAP\UsernameToken* | string) API key or UsernameToken object.
- **\$sandbox** (bool) Whether the testing environment should be used.
- **\$mode** (int) Set the preferred connection strategy.

Valid options are: - *MODE_REST*: New REST API - *MODE_SOAP*: New SOAP API - *MODE_LEGACY*: Not supported anymore, converts to *MODE_SOAP*

Throws *\Firstred\PostNL\Exception\InvalidApiModeException*

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*

Throws *\Firstred\PostNL\Exception\InvalidApiModeException*

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*

```
public Firstred\PostNL\PostNL::setToken($apiKey)
```

Set the token.

Parameters

- **\$apiKey** (string | *\Firstred\PostNL\Entity\SOAP\UsernameToken*)

Returns *\Firstred\PostNL\PostNL*

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*

Since 1.0.0

```
public Firstred\PostNL\PostNL::getRestApiKey()
```

Get REST API Key.

Returns bool | string

Since 1.0.0

Deprecated 1.4.1 Use ``getApiKey`` instead

```
public Firstred\PostNL\PostNL::getApiKey()
```

Get API Key.

Returns null | string

Since 1.4.1

Deprecated 1.4.1 Will be removed from 2.0.0 on, without a replacement.

```
public Firstred\PostNL\PostNL::getToken()
```

Get UsernameToken object (for SOAP).

Returns bool | *\Firstred\PostNL\Entity\SOAP\UsernameToken*

Since 1.0.0

Deprecated 1.4.1 Use ``getApiKey`` instead

```
public Firstred\PostNL\PostNL::getCustomer()
```

Get PostNL Customer.

Returns *\Firstred\PostNL\Entity\Customer*

Since 1.0.0

```
public Firstred\PostNL\PostNL::setCustomer($customer)
```

Set PostNL Customer.

Parameters

- **\$customer** (*Firstred\PostNL\Entity\Customer*)

Returns *\Firstred\PostNL\PostNL*

Since 1.0.0

```
public Firstred\PostNL\PostNL::getSandbox()
```

Get sandbox mode.

Returns bool

Since 1.0.0

```
public Firstred\PostNL\PostNL::setSandbox($sandbox)
```

Set sandbox mode.

Parameters

- **\$sandbox** (bool)

Returns *\Firstred\PostNL\PostNL*

Since 1.0.0

```
public Firstred\PostNL\PostNL::getMode()
```

Get the current mode.

Returns int

Since 1.0.0

```
public Firstred\PostNL\PostNL::setMode($mode)
```

Set current mode.

Parameters

- **\$mode** (int)

Returns *\Firstred\PostNL\PostNL*

Throws *\Firstred\PostNL\Exception\InvalidApiModeException*

Since 1.0.0

public Firstred\PostNL\PostNL::**getHttpClient()**

HttpClient.

Automatically load Guzzle when available

Returns *\Firstred\PostNL\HttpClient\ClientInterface*

Since 1.0.0

public Firstred\PostNL\PostNL::**setHttpClient(\$client)**

Set the HttpClient.

Parameters

- **\$client** (*Firstred\PostNL\HttpClient\ClientInterface*)

Since 1.0.0

public Firstred\PostNL\PostNL::**getLogger()**

Get the logger.

Returns *\Psr\Log\LoggerInterface*

Since 1.0.0

public Firstred\PostNL\PostNL::**setLogger(\$logger)**

Set the logger.

Parameters

- **\$logger** (*\Psr\Log\LoggerInterface*)

Returns *\Firstred\PostNL\PostNL*

Since 1.0.0

public Firstred\PostNL\PostNL::**resetLogger()**

Set a dummy logger

Returns static

Since 1.2.0

public Firstred\PostNL\PostNL::**getRequestFactory()**

Get PSR-7 Request factory.

Returns \Psr\Http\Message\RequestFactoryInterface | \Firstred\PostNL\Factory\RequestFactoryInterface

Since 1.2.0

```
public Firstred\PostNL\PostNL::setRequestFactory($requestFactory)
```

Set PSR-7 Request factory.

Parameters

- **\$requestFactory** (Psr\Http\Message\RequestFactoryInterface | \Firstred\PostNL\Factory\RequestFactoryInterface)

Returns static

Since 1.2.0

Since 1.2.0

```
public Firstred\PostNL\PostNL::getResponseFactory()
```

Get PSR-7 Response factory.

Returns \Psr\Http\Message\ResponseFactoryInterface | \Firstred\PostNL\Factory\ResponseFactoryInterface

Since 1.2.0

```
public Firstred\PostNL\PostNL::setResponseFactory($responseFactory)
```

Set PSR-7 Response factory.

Parameters

- **\$responseFactory** (Psr\Http\Message\ResponseFactoryInterface | \Firstred\PostNL\Factory\ResponseFactoryInterface)

Returns static

Since 1.2.0

Since 1.2.0

```
public Firstred\PostNL\PostNL::getStreamFactory()
```

Set PSR-7 Stream factory.

Returns \Psr\Http\Message\StreamFactoryInterface | \Firstred\PostNL\Factory\StreamFactoryInterface

Since 1.2.0

```
public Firstred\PostNL\PostNL::setStreamFactory($streamFactory)
```

Set PSR-7 Stream factory.

Parameters

- **\$streamFactory** (Psr\Http\Message\StreamFactoryInterface | \Firstred\PostNL\Factory\StreamFactoryInterface)

Returns static

Since 1.2.0

Since 1.2.0

public Firstred\PostNL\PostNL::getBarcodeService()

Barcode service.

Automatically load the barcode service

Returns \Firstred\PostNL\Service\BarcodeServiceInterface

Since 1.0.0

public Firstred\PostNL\PostNL::setBarcodeService(\$service)

Set the barcode service.

Parameters

- **\$service** (Firstred\PostNL\Service\BarcodeServiceInterface)

Since 1.0.0

public Firstred\PostNL\PostNL::getLabellingService()

Labelling service.

Automatically load the labelling service

Returns \Firstred\PostNL\Service\LabellingServiceInterface

Since 1.0.0

public Firstred\PostNL\PostNL::setLabellingService(\$service)

Set the labelling service.

Parameters

- **\$service** (Firstred\PostNL\Service\LabellingServiceInterface)

Since 1.0.0

public Firstred\PostNL\PostNL::getConfirmingService()

Confirming service.

Automatically load the confirming service

Returns \Firstred\PostNL\Service\ConfirmingServiceInterface

Since 1.0.0

```
public Firstred\PostNL\PostNL::setConfirmingService($service)
```

Set the confirming service.

Parameters

- **\$service** (*Firstred\PostNL\Service\ConfirmingServiceInterface*)

Since 1.0.0

```
public Firstred\PostNL\PostNL::getShippingStatusService()
```

Shipping status service.

Automatically load the shipping status service

Returns *\Firstred\PostNL\Service\ShippingStatusServiceInterface*

Since 1.0.0

```
public Firstred\PostNL\PostNL::setShippingStatusService($service)
```

Set the shipping status service.

Parameters

- **\$service** (*Firstred\PostNL\Service\ShippingStatusServiceInterface*)

Since 1.0.0

```
public Firstred\PostNL\PostNL::getDeliveryDateService()
```

Delivery date service.

Automatically load the delivery date service

Returns *\Firstred\PostNL\Service\DeliveryDateServiceInterface*

Since 1.0.0

```
public Firstred\PostNL\PostNL::setDeliveryDateService($service)
```

Set the delivery date service.

Parameters

- **\$service** (*Firstred\PostNL\Service\DeliveryDateServiceInterface*)

Since 1.0.0

```
public Firstred\PostNL\PostNL::getTimeframeService()
```

Timeframe service.

Automatically load the timeframe service

Returns *\Firstred\PostNL\Service\TimeframeServiceInterface*

Since 1.0.0

```
public Firstred\PostNL\PostNL::setTimeframeService($service)
```

Set the timeframe service.

Parameters

- **\$service** (*Firstred\PostNL\Service\TimeframeServiceInterface*)

Since 1.0.0

```
public Firstred\PostNL\PostNL::getLocationService()
```

Location service.

Automatically load the location service

Returns *\Firstred\PostNL\Service\LocationServiceInterface*

Since 1.0.0

```
public Firstred\PostNL\PostNL::setLocationService($service)
```

Set the location service.

Parameters

- **\$service** (*Firstred\PostNL\Service\LocationServiceInterface*)

Since 1.0.0

```
public Firstred\PostNL\PostNL::getShippingService()
```

Shipping service.

Automatically load the shipping service

Returns mixed

Since 1.2.0

```
public Firstred\PostNL\PostNL::setShippingService($service)
```

Set the shipping service.

Parameters

- **\$service** (*Firstred\PostNL\Service\ShippingServiceInterface*)

Since 1.2.0

```
public Firstred\PostNL\PostNL::generateBarcode($type='3S', $range=null, $serie=null,
                                                $seps=false)
```

Generate a single barcode.

Parameters

- **\$type** (string)
- **\$range** (string)
- **\$serie** (string)
- **\$seps** (bool)

Returns string The barcode as a string

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*

Throws *\Firstred\PostNL\Exception\InvalidBarcodeException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*

Throws *\Firstred\PostNL\Exception\InvalidBarcodeException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*

Throws *\Firstred\PostNL\Exception\InvalidBarcodeException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*

Throws *\Firstred\PostNL\Exception\InvalidBarcodeException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*

Throws *\Firstred\PostNL\Exception\InvalidBarcodeException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*

Throws *\Firstred\PostNL\Exception\InvalidBarcodeException*

Since 1.0.0

public Firstred\PostNL\PostNL::generateBarcodeByCountryCode(\$iso)

Generate a single barcode by country code.

Parameters

- **\$iso** (string) 2-letter Country ISO Code

Returns string The Barcode as a string

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*

Throws *\Firstred\PostNL\Exception\InvalidBarcodeException*

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*

Throws *\Firstred\PostNL\Exception\InvalidBarcodeException*

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*

Throws *\Firstred\PostNL\Exception\InvalidBarcodeException*

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*

Throws *\Firstred\PostNL\Exception\InvalidBarcodeException*

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*
Throws *\Firstred\PostNL\Exception\InvalidBarcodeException*
Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*
Throws *\Firstred\PostNL\Exception\InvalidBarcodeException*
Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*
Throws *\Firstred\PostNL\Exception\InvalidBarcodeException*
Since 1.0.0

public Firstred\PostNL\PostNL::generateBarcodesByCountryCodes(\$isos)

Generate a single barcode by country code.

Parameters

- \$isos (array) key = iso code, value = amount of barcodes requested

Returns array Country isos with the barcode as string

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*
Throws *\Firstred\PostNL\Exception\InvalidBarcodeException*
Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\InvalidConfigurationException`

Throws `\Firstred\PostNL\Exception\InvalidBarcodeException`

Throws `\Firstred\PostNL\Exception\InvalidConfigurationException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\InvalidConfigurationException`

Throws `\Firstred\PostNL\Exception\InvalidBarcodeException`

Throws `\Firstred\PostNL\Exception\InvalidConfigurationException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\InvalidConfigurationException`

Throws `\Firstred\PostNL\Exception\InvalidBarcodeException`

Throws `\Firstred\PostNL\Exception\InvalidConfigurationException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\InvalidConfigurationException`

Throws `\Firstred\PostNL\Exception\InvalidBarcodeException`

Throws `\Firstred\PostNL\Exception\InvalidConfigurationException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\InvalidConfigurationException`

Throws `\Firstred\PostNL\Exception\InvalidBarcodeException`

Throws `\Firstred\PostNL\Exception\InvalidConfigurationException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\InvalidConfigurationException`

Throws `\Firstred\PostNL\Exception\InvalidBarcodeException`

Since 1.0.0

```
public Firstred\PostNL\PostNL::sendShipment($shipment, $printertype='GraphicFile\PDF',  
                                             $confirm=true)
```

Send a single shipment.

Parameters

- **\$shipment** (*Firstred\PostNL\Entity\Shipment*)
- **\$printertype** (string)
- **\$confirm** (bool)

Returns *\Firstred\PostNL\Entity\Response\SendShipmentResponse*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Psr\Cache\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidMessageTimeStampException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Psr\Cache\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidMessageTimeStampException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Psr\Cache\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidMessageTimeStampException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Psr\Cache\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidMessageTimeStampException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Psr\Cache\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\InvalidMessageTimeStampException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Psr\Cache\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\InvalidMessageTimeStampException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Psr\Cache\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\InvalidMessageTimeStampException`
Since 1.2.0

```
public Firstred\PostNL\PostNL::sendShipments( $shipments, $printertype='GraphicFile\PDF',
                                             $confirm=true, $merge=false,
                                             $format=Label::FORMAT_A4, $positions=[1 =>
                                             true, 2 => true, 3 => true, 4 => true],
                                             $a6Orientation='P')
```

Send multiple shipments.

Parameters

- **\$shipments** (`Firstred\PostNL\Entity\Shipment[]`) Array of shipments
- **\$printertype** (string) Printer type, see PostNL dev docs for available types
- **\$confirm** (bool) Immediately confirm the shipments
- **\$merge** (bool) Merge the PDFs and return them in a MyParcel way
- **\$format** (int) A4 or A6
- **\$positions** (array) Set the positions of the A6s on the first A4

The indices should be the position number, marked with *true* or *false* These are the position numbers: `` +---+ |2|4| +---+ |1|3| +---+ `` So, for `` +---+ |x|✓| +---+ |✓|x| +---+ `` you would have to pass: ``php [ 1 => true, 2 => false, 3 => false, 4 => true, ]`` * **\$a6Orientation** (string) A6 orientation (P or L)

Returns `\Firstred\PostNL\Entity\Response\SendShipmentResponse` | string
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\setasign\Fpdi\PdfParser\CrossReference\CrossReferenceException`

Throws `\setasign\Fpdi\PdfParser\Filter\FilterException`

Throws `\setasign\Fpdi\PdfParser\PdfParserException`

Throws `\setasign\Fpdi\PdfParser\Type\PdfTypeException`

Throws `\setasign\Fpdi\PdfReader\PdfReaderException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Psr\Cache\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\InvalidMessageTimeStampException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\setasign\Fpdi\PdfParser\CrossReference\CrossReferenceException`

Throws `\setasign\Fpdi\PdfParser\Filter\FilterException`

Throws `\setasign\Fpdi\PdfParser\PdfParserException`

Throws `\setasign\Fpdi\PdfParser\Type\PdfTypeException`

Throws `\setasign\Fpdi\PdfReader\PdfReaderException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Psr\Cache\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\InvalidMessageTimeStampException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\setasign\Fpdi\PdfParser\CrossReference\CrossReferenceException`

Throws `\setasign\Fpdi\PdfParser\Filter\FilterException`

Throws `\setasign\Fpdi\PdfParser\PdfParserException`

Throws `\setasign\Fpdi\PdfParser\Type\PdfTypeException`

Throws `\setasign\Fpdi\PdfReader\PdfReaderException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Psr\Cache\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\InvalidMessageTimeStampException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\setasign\Fpdi\PdfParser\CrossReference\CrossReferenceException`

Throws `\setasign\Fpdi\PdfParser\Filter\FilterException`

Throws `\setasign\Fpdi\PdfParser\PdfParserException`

Throws `\setasign\Fpdi\PdfParser\Type\PdfTypeException`

Throws `\setasign\Fpdi\PdfReader\PdfReaderException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Psr\Cache\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\InvalidMessageTimeStampException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\setasign\Fpdi\PdfParser\CrossReference\CrossReferenceException`

Throws `\setasign\Fpdi\PdfParser\Filter\FilterException`

Throws `\setasign\Fpdi\PdfParser\PdfParserException`

Throws `\setasign\Fpdi\PdfParser\Type\PdfTypeException`

Throws `\setasign\Fpdi\PdfReader\PdfReaderException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Psr\Cache\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\InvalidMessageTimeStampException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\setasign\Fpdi\PdfParser\CrossReference\CrossReferenceException`

Throws `\setasign\Fpdi\PdfParser\Filter\FilterException`

Throws `\setasign\Fpdi\PdfParser\PdfParserException`

Throws `\setasign\Fpdi\PdfParser\Type\PdfTypeException`

Throws `\setasign\Fpdi\PdfReader\PdfReaderException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Psr\Cache\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\InvalidMessageTimeStampException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\setasign\Fpdi\PdfParser\CrossReference\CrossReferenceException`

Throws `\setasign\Fpdi\PdfParser\Filter\FilterException`

Throws `\setasign\Fpdi\PdfParser\PdfParserException`

Throws `\setasign\Fpdi\PdfParser\Type\PdfTypeException`

Throws `\setasign\Fpdi\PdfReader\PdfReaderException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Psr\Cache\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\InvalidMessageTimeStampException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\setasign\Fpdi\PdfParser\CrossReference\CrossReferenceException`

Throws `\setasign\Fpdi\PdfParser\Filter\FilterException`

Throws `\setasign\Fpdi\PdfParser\PdfParserException`

Throws `\setasign\Fpdi\PdfParser\Type\PdfTypeException`

Throws `\setasign\Fpdi\PdfReader\PdfReaderException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Psr\Cache\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\InvalidMessageTimeStampException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\setasign\Fpdi\PdfParser\CrossReference\CrossReferenceException`

Throws `\setasign\Fpdi\PdfParser\Filter\FilterException`

Throws `\setasign\Fpdi\PdfParser\PdfParserException`

Throws `\setasign\Fpdi\PdfParser\Type\PdfTypeException`

Throws `\setasign\Fpdi\PdfReader\PdfReaderException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Psr\Cache\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\InvalidMessageTimeStampException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\setasign\Fpdi\PdfParser\CrossReference\CrossReferenceException`

Throws `\setasign\Fpdi\PdfParser\Filter\FilterException`

Throws `\setasign\Fpdi\PdfParser\PdfParserException`

Throws `\setasign\Fpdi\PdfParser\Type\PdfTypeException`

Throws `\setasign\Fpdi\PdfReader\PdfReaderException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Psr\Cache\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\InvalidMessageTimeStampException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\setasign\Fpdi\PdfParser\CrossReference\CrossReferenceException`

Throws `\setasign\Fpdi\PdfParser\Filter\FilterException`

Throws `\setasign\Fpdi\PdfParser\PdfParserException`

Throws `\setasign\Fpdi\PdfParser\Type\PdfTypeException`

Throws `\setasign\Fpdi\PdfReader\PdfReaderException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Psr\Cache\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\InvalidMessageTimeStampException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\setasign\Fpdi\PdfParser\CrossReference\CrossReferenceException`

Throws `\setasign\Fpdi\PdfParser\Filter\FilterException`

Throws `\setasign\Fpdi\PdfParser\PdfParserException`

Throws `\setasign\Fpdi\PdfParser\Type\PdfTypeException`

Throws `\setasign\Fpdi\PdfReader\PdfReaderException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Psr\Cache\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\InvalidMessageTimeStampException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\setasign\Fpdi\PdfParser\CrossReference\CrossReferenceException`

Throws `\setasign\Fpdi\PdfParser\Filter\FilterException`
Throws `\setasign\Fpdi\PdfParser\PdfParserException`
Throws `\setasign\Fpdi\PdfParser\Type\PdfTypeException`
Throws `\setasign\Fpdi\PdfReader\PdfReaderException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Psr\Cache\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\InvalidMessageTimeStampException`
Since 1.2.0

```
public Firstred\PostNL\PostNL::generateLabel($shipment, $sprintertype='GraphicFile\PDF',
                                             $confirm=true)
```

Generate a single label.

Parameters

- **\$shipment** (`Firstred\PostNL\Entity\Shipment`)
- **\$sprintertype** (string)
- **\$confirm** (bool)

Returns `\Firstred\PostNL\Entity\Response\GenerateLabelResponse`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Psr\Cache\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\InvalidMessageTimeStampException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Psr\Cache\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\InvalidMessageTimeStampException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Psr\Cache\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\InvalidMessageTimeStampException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Psr\Cache\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\InvalidMessageTimeStampException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Psr\Cache\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\InvalidMessageTimeStampException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Psr\Cache\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\InvalidMessageTimeStampException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Psr\Cache\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\InvalidMessageTimeStampException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Psr\Cache\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\InvalidMessageTimeStampException`

Since 1.0.0

```
public Firstred\PostNL\PostNL::generateLabels( $shipments, $printertype='\GraphicFile\PDF',
                                                $confirm=true, $merge=false,
                                                $format=Label::FORMAT_A4, $positions=[1 =>
true, 2 => true, 3 => true, 4 => true],
                                                $a6Orientation='P')
```

Generate or retrieve multiple labels.

Note that instead of returning a GenerateLabelResponse this function can merge the labels and return a string which contains the PDF with the merged pages as well.

Parameters

- **\$shipments** (`Firstred\PostNL\Entity\Shipment[]`) (key = ID) Shipments
- **\$printertype** (string) Printer type, see PostNL dev docs for available types
- **\$confirm** (bool) Immediately confirm the shipments
- **\$merge** (bool) Merge the PDFs and return them in a MyParcel way
- **\$format** (int) A4 or A6
- **\$positions** (array) Set the positions of the A6s on the first A4

The indices should be the position number, marked with *true* or *false* These are the position numbers: `` +--+ |2|4| +--+ |1|3| +--+`` So, for `` +--+ |x|✓| +--+ |✓|x| +--+`` you would have to pass: ``php [ 1 => true, 2 => false, 3 => false, 4 => true, ]`` * **\$a6Orientation** (string) A6 orientation (P or L)

Returns `\Firstred\PostNL\Entity\Response\GenerateLabelResponse[]` | string

Throws `\setasign\Fpdi\PdfParser\CrossReference\CrossReferenceException`

Throws `\setasign\Fpdi\PdfParser\Filter\FilterException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\InvalidMessageTimeStampException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\setasign\Fpdi\PdfParser\PdfParserException`

Throws `\setasign\Fpdi\PdfReader\PdfReaderException`

Throws `\setasign\Fpdi\PdfParser\Type\PdfTypeException`

Throws `\Firstred\PostNL\Exception\PostNLException`

Throws `\Psr\Cache\InvalidArgumentException`

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws \setasign\Fpdi\PdfParser\CrossReference\CrossReferenceException

Throws \setasign\Fpdi\PdfParser\Filter\FilterException

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidMessageTimeStampException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws \setasign\Fpdi\PdfParser\PdfParserException

Throws \setasign\Fpdi\PdfReader\PdfReaderException

Throws \setasign\Fpdi\PdfParser\Type\PdfTypeException

Throws *\Firstred\PostNL\Exception\PostNLException*

Throws \Psr\Cache\InvalidArgumentException

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws \setasign\Fpdi\PdfParser\CrossReference\CrossReferenceException

Throws \setasign\Fpdi\PdfParser\Filter\FilterException

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidMessageTimeStampException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws \setasign\Fpdi\PdfParser\PdfParserException

Throws \setasign\Fpdi\PdfReader\PdfReaderException

Throws \setasign\Fpdi\PdfParser\Type\PdfTypeException

Throws *\Firstred\PostNL\Exception\PostNLException*

Throws \Psr\Cache\InvalidArgumentException

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws \setasign\Fpdi\PdfParser\CrossReference\CrossReferenceException

Throws \setasign\Fpdi\PdfParser\Filter\FilterException

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidMessageTimeStampException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws \setasign\Fpdi\PdfParser\PdfParserException

Throws \setasign\Fpdi\PdfReader\PdfReaderException

Throws \setasign\Fpdi\PdfParser\Type\PdfTypeException

Throws *\Firstred\PostNL\Exception\PostNLException*

Throws \Psr\Cache\InvalidArgumentException

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws \setasign\Fpdi\PdfParser\CrossReference\CrossReferenceException

Throws \setasign\Fpdi\PdfParser\Filter\FilterException

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidMessageTimeStampException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\setasign\Fpdi\PdfParser\PdfParserException*

Throws *\setasign\Fpdi\PdfReader\PdfReaderException*

Throws *\setasign\Fpdi\PdfParser\Type\PdfTypeException*

Throws *\Firstred\PostNL\Exception\PostNLException*

Throws *\Psr\Cache\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\setasign\Fpdi\PdfParser\CrossReference\CrossReferenceException*

Throws *\setasign\Fpdi\PdfParser\Filter\FilterException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidMessageTimeStampException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\setasign\Fpdi\PdfParser\PdfParserException*

Throws *\setasign\Fpdi\PdfReader\PdfReaderException*

Throws *\setasign\Fpdi\PdfParser\Type\PdfTypeException*

Throws *\Firstred\PostNL\Exception\PostNLException*

Throws *\Psr\Cache\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\setasign\Fpdi\PdfParser\CrossReference\CrossReferenceException*

Throws *\setasign\Fpdi\PdfParser\Filter\FilterException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidMessageTimeStampException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\setasign\Fpdi\PdfParser\PdfParserException*

Throws *\setasign\Fpdi\PdfReader\PdfReaderException*

Throws *\setasign\Fpdi\PdfParser\Type\PdfTypeException*

Throws *\Firstred\PostNL\Exception\PostNLException*

Throws *\Psr\Cache\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\setasign\Fpdi\PdfParser\CrossReference\CrossReferenceException*

Throws *\setasign\Fpdi\PdfParser\Filter\FilterException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidMessageTimeStampException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\setasign\Fpdi\PdfParser\PdfParserException*

Throws *\setasign\Fpdi\PdfReader\PdfReaderException*

Throws *\setasign\Fpdi\PdfParser\Type\PdfTypeException*

Throws *\Firstred\PostNL\Exception\PostNLException*

Throws *\Psr\Cache\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\setasign\Fpdi\PdfParser\CrossReference\CrossReferenceException*

Throws *\setasign\Fpdi\PdfParser\Filter\FilterException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidMessageTimeStampException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\setasign\Fpdi\PdfParser\PdfParserException*

Throws *\setasign\Fpdi\PdfReader\PdfReaderException*

Throws *\setasign\Fpdi\PdfParser\Type\PdfTypeException*

Throws *\Firstred\PostNL\Exception\PostNLException*

Throws *\Psr\Cache\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\setasign\Fpdi\PdfParser\CrossReference\CrossReferenceException*

Throws *\setasign\Fpdi\PdfParser\Filter\FilterException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidMessageTimeStampException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\setasign\Fpdi\PdfParser\PdfParserException*

Throws *\setasign\Fpdi\PdfReader\PdfReaderException*

Throws *\setasign\Fpdi\PdfParser\Type\PdfTypeException*

Throws *\Firstred\PostNL\Exception\PostNLException*

Throws *\Psr\Cache\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\setasign\Fpdi\PdfParser\CrossReference\CrossReferenceException*

Throws *\setasign\Fpdi\PdfParser\Filter\FilterException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidMessageTimeStampException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\setasign\Fpdi\PdfParser\PdfParserException*

Throws *\setasign\Fpdi\PdfReader\PdfReaderException*

Throws `\setasign\Fpdi\PdfParser\Type\PdfTypeException`
Throws `\Firstred\PostNL\Exception\PostNLException`
Throws `\Psr\Cache\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\setasign\Fpdi\PdfParser\CrossReference\CrossReferenceException`
Throws `\setasign\Fpdi\PdfParser\Filter\FilterException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\InvalidMessageTimeStampException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\setasign\Fpdi\PdfParser\PdfParserException`
Throws `\setasign\Fpdi\PdfReader\PdfReaderException`
Throws `\setasign\Fpdi\PdfParser\Type\PdfTypeException`
Throws `\Firstred\PostNL\Exception\PostNLException`
Throws `\Psr\Cache\InvalidArgumentException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Since 1.0.0

public `Firstred\PostNL\PostNL::confirmShipment($shipment)`

Confirm a single shipment.

Parameters

- **\$shipment** (`Firstred\PostNL\Entity\Shipment`)

Returns `\Firstred\PostNL\Entity\Response\ConfirmingResponseShipment`

Since 1.0.0

public `Firstred\PostNL\PostNL::confirmShipments($shipments)`

Confirm multiple shipments.

Parameters

- **\$shipments** (array)

Returns `\Firstred\PostNL\Entity\Response\ConfirmingResponseShipment[]`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Since 1.0.0

public Firstred\PostNL\PostNL::getCurrentStatus(\$currentStatus)

Get the current status of a shipment.

This is a combi-function, supporting the following:

- CurrentStatus (by barcode):
 - Fill the Shipment->Barcode property. Leave the rest empty.
- CurrentStatusByReference:
 - Fill the Shipment->Reference property. Leave the rest empty.

Parameters

- **\$currentStatus** (*Firstred\PostNL\Entity\Request\CurrentStatus* | *\Firstred\PostNL\Entity\Request\CurrentStatusByReference*)

Returns *\Firstred\PostNL\Entity\Response\CurrentStatusResponse*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Since 1.0.0

Deprecated 1.2.0 Use the dedicated methods (get by phase and status are no longer working)

public *Firstred\PostNL\PostNL::getShippingStatusByBarcode(\$barcode, \$complete=false)*

Get the current status of the given shipment by barcode.

Parameters

- **\$barcode** (string) Pass a single barcode
- **\$complete** (bool) Return the complete status (incl. shipment history)

Returns *\Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment | \Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment*

Throws *\Firstred\PostNL\Exception\ShipmentNotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\ShipmentNotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\ShipmentNotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\ShipmentNotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\ShipmentNotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\ShipmentNotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Throws `\Firstred\PostNL\Exception\ShipmentNotFoundException`
Throws `\Firstred\PostNL\Exception\CifDownException`
Throws `\Firstred\PostNL\Exception\CifException`
Throws `\Firstred\PostNL\Exception\HttpClientException`
Throws `\Firstred\PostNL\Exception\NotSupportedException`
Throws `\Firstred\PostNL\Exception\ResponseException`
Throws `\Firstred\PostNL\Exception\NotFoundException`
Since 1.2.0

public `Firstred\PostNL\PostNL::getShippingStatusesByBarcodes($barcodes, $complete=false)`

Get the current statuses of the given shipments by barcodes.

Parameters

- **\$barcodes** (string[]) Pass multiple barcodes

- **\$complete** (bool) Return the complete status (incl. shipment history)

Returns `\Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment[]` | `\Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment[]`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Psr\Cache\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Psr\Cache\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Psr\Cache\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Psr\Cache\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Since 1.2.0

public `Firstred\PostNL\PostNL::getShippingStatusByReference($reference, $complete=false)`

Get the current status of the given shipment by reference.

Parameters

- **\$reference** (string) Pass a single reference
- **\$complete** (bool) Return the complete status (incl. shipment history)

Returns `\Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment` | `\Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws `\Firstred\PostNL\Exception\NotSupportedException`

Throws `\Psr\Cache\InvalidArgumentException`

Throws `\Firstred\PostNL\Exception\ResponseException`

Throws `\Firstred\PostNL\Exception\NotFoundException`

Throws `\Firstred\PostNL\Exception\ShipmentNotFoundException`

Throws `\Firstred\PostNL\Exception\CifDownException`

Throws `\Firstred\PostNL\Exception\CifException`

Throws `\Firstred\PostNL\Exception\HttpClientException`

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Psr\Cache\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\ShipmentNotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Psr\Cache\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\ShipmentNotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Psr\Cache\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\ShipmentNotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Psr\Cache\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\ShipmentNotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Psr\Cache\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\ShipmentNotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Psr\Cache\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\NotFoundException*
Throws *\Firstred\PostNL\Exception\ShipmentNotFoundException*
Throws *\Firstred\PostNL\Exception\CifDownException*
Throws *\Firstred\PostNL\Exception\CifException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Psr\Cache\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\NotFoundException*
Throws *\Firstred\PostNL\Exception\ShipmentNotFoundException*
Since 1.2.0

public Firstred\PostNL\PostNL::getShippingStatusesByReferences(*\$references*, *\$complete=false*)

Get the current statuses of the given shipments by references.

Parameters

- **\$references** (string[]) Pass multiple references
- **\$complete** (bool) Return the complete status (incl. shipment history)

Returns *\Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment[]* |
\Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment[]

Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Psr\Cache\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Psr\Cache\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Psr\Cache\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\ResponseException*
Throws *\Firstred\PostNL\Exception\HttpClientException*
Throws *\Firstred\PostNL\Exception\NotSupportedException*
Throws *\Psr\Cache\InvalidArgumentException*
Throws *\Firstred\PostNL\Exception\ResponseException*

Since 1.2.0

```
public Firstred\PostNL\PostNL::getCompleteStatus($completeStatus)
```

Get the complete status of a shipment.

This is a combi-function, supporting the following:

- CurrentStatus (by barcode):
 - Fill the Shipment->Barcode property. Leave the rest empty.
- CurrentStatusByReference:
 - Fill the Shipment->Reference property. Leave the rest empty.
- CurrentStatusByPhase:
 - Fill the Shipment->PhaseCode property, do not pass Barcode or Reference.
Optionally add DateFrom and/or DateTo.
- CurrentStatusByStatus:
 - Fill the Shipment->StatusCode property. Leave the rest empty.

Parameters

- **\$completeStatus** (*Firstred\PostNL\Entity\Request\CompleteStatus*)

Returns *\Firstred\PostNL\Entity\Response\CompleteStatusResponse*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\NotFoundException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws [\Firstred\PostNL\Exception\ResponseException](#)
Throws [\Firstred\PostNL\Exception\NotFoundException](#)
Throws [\Firstred\PostNL\Exception\CifDownException](#)
Throws [\Firstred\PostNL\Exception\CifException](#)
Throws [\Firstred\PostNL\Exception\HttpClientException](#)
Throws [\Firstred\PostNL\Exception\NotSupportedException](#)
Throws [\Firstred\PostNL\Exception\ResponseException](#)
Throws [\Firstred\PostNL\Exception\NotFoundException](#)
Throws [\Firstred\PostNL\Exception\CifDownException](#)
Throws [\Firstred\PostNL\Exception\CifException](#)
Throws [\Firstred\PostNL\Exception\HttpClientException](#)
Throws [\Firstred\PostNL\Exception\NotSupportedException](#)
Throws [\Firstred\PostNL\Exception\ResponseException](#)
Throws [\Firstred\PostNL\Exception\NotFoundException](#)
Since 1.0.0

Deprecated 1.2.0 Use the dedicated getShippingStatus* methods (get by phase and status are no longer working)

public Firstred\PostNL\PostNL::getUpdatedShipments(\$dateTimeFrom=null, \$dateTimeTo=null)

Get updated shipments

Parameters

- **\$dateTimeFrom** (DateTimeInterface | null)
- **\$dateTimeTo** (DateTimeInterface | null)

Returns [\Firstred\PostNL\Entity\Response\UpdatedShipmentsResponse\[\]](#)

Since 1.2.0

public Firstred\PostNL\PostNL::getSignature(\$signature)

Get the signature of a shipment.

Parameters

- **\$signature** ([Firstred\PostNL\Entity\Request\GetSignature](#))

Returns [\Firstred\PostNL\Entity\Response\GetSignatureResponseSignature](#)

Since 1.0.0

Deprecated 1.2.0 Use the getSignature(s)By* alternatives

public Firstred\PostNL\PostNL::getSignatureByBarcode(\$barcode)

Get the signature of a shipment.

Parameters

- **\$barcode** (string)

Returns *\Firstred\PostNL\Entity\Response\GetSignatureResponseSignature*

Since 1.2.0

public Firstred\PostNL\PostNL::getSignaturesByBarcodes(*\$barcodes*)

Get the signature of a shipment.

Parameters

- **\$barcodes** (string[])

Returns *\Firstred\PostNL\Entity\Response\GetSignatureResponseSignature[]*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Psr\Cache\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Psr\Cache\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Psr\Cache\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\NotSupportedException*

Throws *\Psr\Cache\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Since 1.2.0

public Firstred\PostNL\PostNL::getDeliveryDate(*\$getDeliveryDate*)

Get a delivery date.

Parameters

- **\$getDeliveryDate** (*Firstred\PostNL\Entity\Request\GetDeliveryDate*)

Returns *\Firstred\PostNL\Entity\Response\GetDeliveryDateResponse*

Since 1.0.0

public Firstred\PostNL\PostNL::getSentDate(*\$getSentDate*)

Get a shipping date.

Parameters

- **\$getSentDate** (*Firstred\PostNL\Entity\Request\GetSentDateRequest*)

Returns *\Firstred\PostNL\Entity\Response\GetSentDateResponse*

Since 1.0.0

```
public Firstred\PostNL\PostNL::getTimeframes($getTimeframes)
```

Get timeframes.

Parameters

- **\$getTimeframes** (*Firstred\PostNL\Entity\Request\GetTimeframes*)

Returns *\Firstred\PostNL\Entity\Response\ResponseTimeframes*

Since 1.0.0

```
public Firstred\PostNL\PostNL::getNearestLocations($getNearestLocations)
```

Get nearest locations.

Parameters

- **\$getNearestLocations** (*Firstred\PostNL\Entity\Request\GetNearestLocations*)

Returns *\Firstred\PostNL\Entity\Response\GetNearestLocationsResponse*

Since 1.0.0

```
public Firstred\PostNL\PostNL::getTimeframesAndNearestLocations($getTimeframes,  
                                                                    $getNearestLocations,  
                                                                    $getDeliveryDate)
```

All-in-one function for checkout widgets. It retrieves and returns the

- timeframes
- locations
- delivery date.

Parameters

- **\$getTimeframes** (*Firstred\PostNL\Entity\Request\GetTimeframes*)
- **\$getNearestLocations** (*Firstred\PostNL\Entity\Request\GetNearestLocations*)
- **\$getDeliveryDate** (*Firstred\PostNL\Entity\Request\GetDeliveryDate*)

Returns

```
array [ timeframes => ResponseTimeframes, locations => GetNearestLocationsResponse,  
        delivery_date => GetDeliveryDateResponse,  
        ]
```

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*

Throws *\Psr\Cache\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*

Throws *\Psr\Cache\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*

Throws *\Psr\Cache\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*

Throws *\Psr\Cache\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*

Throws *\Psr\Cache\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*

Throws *\Psr\Cache\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\ResponseException*

Throws *\Firstred\PostNL\Exception\InvalidArgumentException*

Throws *\Firstred\PostNL\Exception\CifDownException*

Throws *\Firstred\PostNL\Exception\CifException*

Throws *\Firstred\PostNL\Exception\HttpClientException*

Throws *\Firstred\PostNL\Exception\InvalidConfigurationException*

Throws \Psr\Cache\InvalidArgumentException

Throws \Firstred\PostNL\Exception\ResponseException

Throws \Firstred\PostNL\Exception\InvalidArgumentException

Since 1.0.0

public Firstred\PostNL\PostNL::getLocationsInArea(*\$getLocationsInArea*)

Get locations in area.

Parameters

- *\$getLocationsInArea* (Firstred\PostNL\Entity\Request\GetLocationsInArea)

Returns \Firstred\PostNL\Entity\Response\GetLocationsInAreaResponse

Since 1.0.0

public Firstred\PostNL\PostNL::getLocation(*\$getLocation*)

Get locations in area.

Parameters

- *\$getLocation* (Firstred\PostNL\Entity\Request\GetLocation)

Returns \Firstred\PostNL\Entity\Response\GetLocationsInAreaResponse

Since 1.0.0

public Firstred\PostNL\PostNL::findBarcodeSerie(*\$type*, *\$range*, *\$eps=null*)

Find a suitable serie for the barcode.

Parameters

- *\$type* (string)
- *\$range* (string)
- *\$eps* (bool) Indicates whether it is an EPS Shipment

Returns string

Throws \Firstred\PostNL\Exception\InvalidBarcodeException

Since 1.0.0

private Firstred\PostNL\PostNL::checkEnvironment()

Check whether this library will work in the current environment

Since 1.2.0

public static Firstred\PostNL\PostNL::triggerDeprecation(*\$package*, *\$version*, *\$message*,
...*\$args*)

Triggers a silenced deprecation notice.

Copyright (c) 2020-present Fabien Potencier

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the “Software”), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED “AS IS”, WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Parameters

- **\$package** (string) The name of the Composer package that is triggering the deprecation
- **\$version** (string) The version of the package that introduced the deprecation
- **\$message** (string) The message of the deprecation
- **...\$args** (mixed) Values to insert in the message using printf() formatting

Since 1.4.0

1.13 Authors

1.13.1 Maintainers:

- [Michael Dekker <git@michaeldekker.nl>](mailto:git@michaeldekker.nl) (maintainer)

Looking for maintainers! If you’d like to help keep this library up to date please send and email to git@michaeldekker.nl

1.13.2 Contributors:

These contributors have helped with making this library possible. Thank you so much!

- [janwilletje](#) (contributor)
- [jbours](#) (contributor)
- [timmtim](#) (contributor)
- [niccifor](#) (contributor)
- [fgd007](#) (contributor)
- [TomKriek](#) (contributor)
- [rowhel95](#) (contributor)

- [lenvanessen](#) (contributor)
- [GetMagented](#) (contributor)
- [rvanvelzen](#) (contributor)
- [timo002](#) (contributor)
- [rdanklof](#) (contributor)
- [Bert Brunekreeft](#) (contributor)
- [Daniel Schipper](#) (contributor)
- [Joshua Bours](#) (contributor)
- [Hidde Schuurman](#) (contributor)
- [Mathieu Haverkamp](#) (contributor)
- [Jeroen Smit](#) (contributor)

PHP NAMESPACE INDEX

f

- Firstred\PostNL, 355
- Firstred\PostNL\Entity, 125
- Firstred\PostNL\Entity\Message, 46
- Firstred\PostNL\Entity\Request, 71
- Firstred\PostNL\Entity\Response, 100
- Firstred\PostNL\Entity\SOAP, 117
- Firstred\PostNL\Exception, 184
- Firstred\PostNL\Exception\Promise, 175
- Firstred\PostNL\Factory, 184
- Firstred\PostNL\HttpClient, 201
- Firstred\PostNL\Service, 209
- Firstred\PostNL\Util, 337

Symbols

<code>__call()</code> (<i>Firstred\PostNL\Entity\AbstractEntity</i> method), 132	<code>__construct()</code> (<i>Firstred\PostNL\Entity\Message\Message</i> method), 47
<code>__call()</code> (<i>Firstred\PostNL\Service\AbstractService</i> method), 271	<code>__construct()</code> (<i>Firstred\PostNL\Entity\OldStatus</i> method), 122
<code>__call()</code> (<i>Firstred\PostNL\Util\FlexibleEntityTrait</i> method), 355	<code>__construct()</code> (<i>Firstred\PostNL\Entity\OpeningHours</i> method), 172
<code>__construct()</code> (<i>Firstred\PostNL\Entity\AbstractEntity</i> method), 132	<code>__construct()</code> (<i>Firstred\PostNL\Entity\ProductOption</i> method), 152
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Address</i> method), 141	<code>__construct()</code> (<i>Firstred\PostNL\Entity\ReasonNoTimeframe</i> method), 127
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Amount</i> method), 145	<code>__construct()</code> (<i>Firstred\PostNL\Entity\Request\CompleteStatus</i> method), 61
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Area</i> method), 129	<code>__construct()</code> (<i>Firstred\PostNL\Entity\Request\CompleteStatusByPhase</i> method), 69
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Barcode</i> method), 148	<code>__construct()</code> (<i>Firstred\PostNL\Entity\Request\CompleteStatusByReference</i> method), 60
<code>__construct()</code> (<i>Firstred\PostNL\Entity>Contact</i> method), 130	<code>__construct()</code> (<i>Firstred\PostNL\Entity\Request\CompleteStatusByStatus</i> method), 49
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Content</i> method), 171	<code>__construct()</code> (<i>Firstred\PostNL\Entity\Request\Confirming</i> method), 72
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Coordinates</i> method), 144	<code>__construct()</code> (<i>Firstred\PostNL\Entity\Request\CurrentStatus</i> method), 67
<code>__construct()</code> (<i>Firstred\PostNL\Entity\CoordinatesNorthWest</i> method), 169	<code>__construct()</code> (<i>Firstred\PostNL\Entity\Request\CurrentStatusByPhase</i> method), 56
<code>__construct()</code> (<i>Firstred\PostNL\Entity\CoordinatesSouthEast</i> method), 121	<code>__construct()</code> (<i>Firstred\PostNL\Entity\Request\CurrentStatusByReference</i> method), 65
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Customer</i> method), 143	<code>__construct()</code> (<i>Firstred\PostNL\Entity\Request\CurrentStatusByStatus</i> method), 57
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Customs</i> method), 166	<code>__construct()</code> (<i>Firstred\PostNL\Entity\Request\GenerateBarcode</i> method), 66
<code>__construct()</code> (<i>Firstred\PostNL\Entity\CutOffTime</i> method), 169	<code>__construct()</code> (<i>Firstred\PostNL\Entity\Request\GenerateLabel</i> method), 70
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Dimension</i> method), 147	<code>__construct()</code> (<i>Firstred\PostNL\Entity\Request\GetDeliveryDate</i> method), 75
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Event</i> method), 131	<code>__construct()</code> (<i>Firstred\PostNL\Entity\Request\GetLocation</i> method), 48
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Expectation</i> method), 136	<code>__construct()</code> (<i>Firstred\PostNL\Entity\Request\GetLocationsInArea</i> method), 55
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Group</i> method), 139	<code>__construct()</code> (<i>Firstred\PostNL\Entity\Request\GetNearestLocations</i> method), 58
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Label</i> method), 135	<code>__construct()</code> (<i>Firstred\PostNL\Entity\Request\GetSentDate</i> method), 53
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Location</i> method), 150	<code>__construct()</code> (<i>Firstred\PostNL\Entity\Request\GetSentDateRequest</i> method), 77
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Message\LabellingMessage</i> method), 46	<code>__construct()</code> (<i>Firstred\PostNL\Entity\Request\GetSignature</i> method), 46

<code>method</code>), 51	<code>method</code>), 119
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Request\GetTimeframe</i> <code>__construct()</code> (<i>Firstred\PostNL\Entity\SOAP\UsernameToken</i> <code>method</code>), 63	<code>method</code>), 118
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Request\SendShipment</i> <code>__construct()</code> (<i>Firstred\PostNL\Entity\Shipment</i> <code>method</code>), 71	<code>method</code>), 155
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Response\CompleteConsignmentResponse</i> (<i>Firstred\PostNL\Entity\Signature</i> <code>method</code>), 94	<code>method</code>), 144
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Response\CompleteConsignmentResponse</i> (<i>Firstred\PostNL\Entity>Status</i> <code>method</code>), 84	<code>method</code>), 159
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Response\CompleteConsignmentResponse</i> (<i>Firstred\PostNL\Entity>StatusAddress</i> <code>method</code>), 116	<code>method</code>), 124
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Response\CompleteConsignmentResponse</i> (<i>Firstred\PostNL\Entity\Sustainability</i> <code>method</code>), 88	<code>method</code>), 161
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Response\ConfirmingRequestShipments</i> (<i>Firstred\PostNL\Entity\Timeframe</i> <code>method</code>), 112	<code>method</code>), 163
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Response\CurrentConsignmentRequest</i> (<i>Firstred\PostNL\Entity\TimeframeTimeFrame</i> <code>method</code>), 93	<code>method</code>), 167
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Response\CurrentConsignmentRequest</i> (<i>Firstred\PostNL\Entity\Timeframes</i> <code>method</code>), 110	<code>method</code>), 137
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Response\GenerateConsignmentRequest</i> (<i>Firstred\PostNL\Entity\Warning</i> <code>method</code>), 92	<code>method</code>), 126
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Response\GenerateConsignmentRequest</i> (<i>Firstred\PostNL\Exception\ApiConnectionException</i> <code>method</code>), 105	<code>method</code>), 177
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Response\GetDeliveryStatusRequest</i> (<i>Firstred\PostNL\Exception\CifException</i> <code>method</code>), 113	<code>method</code>), 181
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Response\GetLocationsAreaRequest</i> (<i>Firstred\PostNL\Exception\HttpClientException</i> <code>method</code>), 92	<code>method</code>), 183
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Response\GetLocationsResult</i> (<i>Firstred\PostNL\Exception\PromiseAggregateException</i> <code>method</code>), 78	<code>method</code>), 176
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Response\GetNearbyLocationsRequest</i> (<i>Firstred\PostNL\Exception\PromiseRejectionException</i> <code>method</code>), 80	<code>method</code>), 175
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Response\GetSentItemsRequest</i> (<i>Firstred\PostNL\Exception\ResponseException</i> <code>method</code>), 99	<code>method</code>), 180
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Response\GetSignatureRequest</i> (<i>Firstred\PostNL\HttpClient\GuzzleClient</i> <code>method</code>), 102	<code>method</code>), 208
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Response\MergedLocations</i> <code>__construct()</code> (<i>Firstred\PostNL\HttpClient\HTTPPlugClient</i> <code>method</code>), 98	<code>method</code>), 198
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Response\ResponseAbstract</i> <code>__construct()</code> (<i>Firstred\PostNL\HttpClient\SymfonyHttpClient</i> <code>method</code>), 107	<code>method</code>), 202
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Response\ResponseAbstract</i> <code>__construct()</code> (<i>Firstred\PostNL\PostNL</i> <code>method</code>), 104	<code>method</code>), 360
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Response\ResponseAbstract</i> <code>__construct()</code> (<i>Firstred\PostNL\Service\AbstractService</i> <code>method</code>), 91	<code>method</code>), 271
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Response\ResponseAbstract</i> <code>__construct()</code> (<i>Firstred\PostNL\Util\EachPromise</i> <code>method</code>), 97	<code>method</code>), 349
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Response\ResponseAbstract</i> <code>__construct()</code> (<i>Firstred\PostNL\Util\PendingPromise</i> <code>method</code>), 82	<code>method</code>), 339
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Response\ResponseAbstract</i> <code>__construct()</code> (<i>Firstred\PostNL\Util\TaskQueue</i> <code>method</code>), 85	<code>method</code>), 347
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Response\SendShipmentResponse</i> (<i>Firstred\PostNL\Util\RFPdi</i> <code>method</code>), 115	<code>method</code>), 348
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Response\SignatureResponse</i> <code>method</code>), 79	
<code>__construct()</code> (<i>Firstred\PostNL\Entity\Response\UpdateShipmentsRequest</i> (<i>Firstred\PostNL\PostNL</i> property), 101	<code>method</code>), 358
<code>__construct()</code> (<i>Firstred\PostNL\Entity\SOAP\Envelope</i> <code>method</code>), 120	<code>method</code>), 131
<code>__construct()</code> (<i>Firstred\PostNL\Entity\SOAP\Security</i> <code>method</code>), 270	<code>method</code>), 270

- AccountName** (*Firstred\PostNL\Entity\Amount* property), **145**
- AccountName** (*Firstred\PostNL\Entity\Response\ResponseAmount* *Firstred\PostNL\Exception*), **176**
- add()** (*Firstred\PostNL\Util\TaskQueue* method), **347**
- addOrUpdateRequest()** (*Firstred\PostNL\HttpClient\BaseHttpClient* method), **195**
- addOrUpdateRequest()** (*Firstred\PostNL\HttpClient\ClientInterface* method), **190**
- addPending()** (*Firstred\PostNL\Util\EachPromise* method), **350**
- Address** (class in *Firstred\PostNL\Entity*), **139**
- Address** (*Firstred\PostNL\Entity\Customer* property), **142**
- Address** (*Firstred\PostNL\Entity\Response\ResponseLocation* property), **95**
- Addresses** (*Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment* property), **86**
- Addresses** (*Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment* property), **108**
- Addresses** (*Firstred\PostNL\Entity\Shipment* property), **153**
- AddressType** (*Firstred\PostNL\Entity\Address* property), **139**
- AddressType** (*Firstred\PostNL\Entity\Response\ResponseAddress* property), **106**
- AddressType** (*Firstred\PostNL\Entity>StatusAddress* property), **123**
- advanceIterator()** (*Firstred\PostNL\Util\EachPromise* method), **350**
- aggregate** (*Firstred\PostNL\Util\EachPromise* property), **349**
- AggregateException** (class in *Firstred\PostNL\Exception\Promise*), **176**
- alert()** (*Firstred\PostNL\Util\DummyLogger* method), **353**
- all()** (*Firstred\PostNL\Util\PromiseTool* method), **344**
- AllowSundaySorting** (*Firstred\PostNL\Entity\Location* property), **148**
- AllowSundaySorting** (*Firstred\PostNL\Entity\Request\GetDeliveryDate* property), **73**
- AllowSundaySorting** (*Firstred\PostNL\Entity\Request\GetSentDate* property), **52**
- Amount** (class in *Firstred\PostNL\Entity*), **144**
- Amounts** (*Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment* property), **86**
- Amounts** (*Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment* property), **108**
- Amounts** (*Firstred\PostNL\Entity\Shipment* property), **153**
- AmountType** (*Firstred\PostNL\Entity\Amount* property), **145**
- angle** (*Firstred\PostNL\Util\RFPdi* property), **348**
- any()** (*Firstred\PostNL\Util\PromiseTool* method), **344**
- ApiConnectionException** (class in *Firstred\PostNL\Exception*), **178**
- ApiException** (class in *Firstred\PostNL\Exception*), **178**
- apiKey** (*Firstred\PostNL\PostNL* property), **358**
- Area** (class in *Firstred\PostNL\Entity*), **128**
- Area** (*Firstred\PostNL\Entity\Address* property), **140**
- Area** (*Firstred\PostNL\Entity\Response\ResponseAddress* property), **106**
- Available** (*Firstred\PostNL\Entity\CutOffTime* property), **169**
- ## B
- Barcode** (class in *Firstred\PostNL\Entity*), **147**
- Barcode** (*Firstred\PostNL\Entity\Request\GenerateBarcode* property), **66**
- Barcode** (*Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment* property), **86**
- Barcode** (*Firstred\PostNL\Entity\Response\ConfirmingResponseShipment* property), **112**
- Barcode** (*Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment* property), **109**
- Barcode** (*Firstred\PostNL\Entity\Response\GenerateBarcodeResponse* property), **91**
- Barcode** (*Firstred\PostNL\Entity\Response\GetSignatureResponseSignature* property), **102**
- Barcode** (*Firstred\PostNL\Entity\Response\ResponseShipment* property), **81**
- Barcode** (*Firstred\PostNL\Entity\Response\UpdatedShipmentsResponse* property), **100**
- Barcode** (*Firstred\PostNL\Entity\Shipment* property), **153**
- Barcodes** (*Firstred\PostNL\Entity\Response\MergedLabel* property), **98**
- BarcodeService** (class in *Firstred\PostNL\Service*), **291**
- barcodeService** (*Firstred\PostNL\PostNL* property), **359**
- BarcodeServiceInterface** (interface in *Firstred\PostNL\Service*), **248**
- BaseHttpClient** (class in *Firstred\PostNL\HttpClient*), **192**
- BIC** (*Firstred\PostNL\Entity\Amount* property), **145**
- BIC** (*Firstred\PostNL\Entity\Response\ResponseAmount* property), **103**
- Body** (class in *Firstred\PostNL\Entity\SOAP*), **117**
- Body** (*Firstred\PostNL\Entity\SOAP\Envelope* property), **120**
- body** (*Firstred\PostNL\Exception\ApiConnectionException* property), **177**
- buildCompleteStatusRequestREST()** (*Firstred\PostNL\Service\ShippingStatusService* method), **319**
- buildCompleteStatusRequestREST()** (*Firstred\PostNL\Service\ShippingStatusServiceInterface* method), **265**

<code>buildConfirmRequestREST()</code> (<i>Firstred\PostNL\Service\ConfirmingService</i> <i>method</i>), 335	(<i>Firstred\PostNL\Service\LocationServiceInterface</i> <i>method</i>), 245
<code>buildConfirmRequestREST()</code> (<i>Firstred\PostNL\Service\ConfirmingServiceInterface</i> <i>method</i>), 218	<code>buildGetLocationRequestSOAP()</code> (<i>Firstred\PostNL\Service\LocationService</i> <i>method</i>), 287
<code>buildConfirmRequestSOAP()</code> (<i>Firstred\PostNL\Service\ConfirmingService</i> <i>method</i>), 336	<code>buildGetLocationRequestSOAP()</code> (<i>Firstred\PostNL\Service\LocationServiceInterface</i> <i>method</i>), 246
<code>buildConfirmRequestSOAP()</code> (<i>Firstred\PostNL\Service\ConfirmingServiceInterface</i> <i>method</i>), 219	<code>buildGetLocationsInAreaRequestREST()</code> (<i>Firstred\PostNL\Service\LocationService</i> <i>method</i>), 285
<code>buildCurrentStatusRequestREST()</code> (<i>Firstred\PostNL\Service\ShippingStatusService</i> <i>method</i>), 318	<code>buildGetLocationsInAreaRequestREST()</code> (<i>Firstred\PostNL\Service\LocationServiceInterface</i> <i>method</i>), 243
<code>buildCurrentStatusRequestREST()</code> (<i>Firstred\PostNL\Service\ShippingStatusServiceInterface</i> <i>method</i>), 264	<code>buildGetLocationsInAreaRequestSOAP()</code> (<i>Firstred\PostNL\Service\LocationService</i> <i>method</i>), 285
<code>buildGenerateBarcodeRequestREST()</code> (<i>Firstred\PostNL\Service\BarcodeService</i> <i>method</i>), 295	<code>buildGetLocationsInAreaRequestSOAP()</code> (<i>Firstred\PostNL\Service\LocationServiceInterface</i> <i>method</i>), 244
<code>buildGenerateBarcodeRequestREST()</code> (<i>Firstred\PostNL\Service\BarcodeServiceInterface</i> <i>method</i>), 252	<code>buildGetNearestLocationsRequestREST()</code> (<i>Firstred\PostNL\Service\LocationService</i> <i>method</i>), 283
<code>buildGenerateBarcodeRequestSOAP()</code> (<i>Firstred\PostNL\Service\BarcodeService</i> <i>method</i>), 295	<code>buildGetNearestLocationsRequestREST()</code> (<i>Firstred\PostNL\Service\LocationServiceInterface</i> <i>method</i>), 242
<code>buildGenerateBarcodeRequestSOAP()</code> (<i>Firstred\PostNL\Service\BarcodeServiceInterface</i> <i>method</i>), 253	<code>buildGetNearestLocationsRequestSOAP()</code> (<i>Firstred\PostNL\Service\LocationService</i> <i>method</i>), 284
<code>buildGenerateLabelRequestREST()</code> (<i>Firstred\PostNL\Service\LabellingService</i> <i>method</i>), 328	<code>buildGetNearestLocationsRequestSOAP()</code> (<i>Firstred\PostNL\Service\LocationServiceInterface</i> <i>method</i>), 243
<code>buildGenerateLabelRequestREST()</code> (<i>Firstred\PostNL\Service\LabellingServiceInterface</i> <i>method</i>), 224	<code>buildGetSentDateRequestREST()</code> (<i>Firstred\PostNL\Service\DeliveryDateService</i> <i>method</i>), 304
<code>buildGenerateLabelRequestSOAP()</code> (<i>Firstred\PostNL\Service\LabellingService</i> <i>method</i>), 329	<code>buildGetSentDateRequestREST()</code> (<i>Firstred\PostNL\Service\DeliveryDateServiceInterface</i> <i>method</i>), 232
<code>buildGenerateLabelRequestSOAP()</code> (<i>Firstred\PostNL\Service\LabellingServiceInterface</i> <i>method</i>), 225	<code>buildGetSentDateRequestSOAP()</code> (<i>Firstred\PostNL\Service\DeliveryDateService</i> <i>method</i>), 305
<code>buildGetDeliveryDateRequestREST()</code> (<i>Firstred\PostNL\Service\DeliveryDateService</i> <i>method</i>), 303	<code>buildGetSentDateRequestSOAP()</code> (<i>Firstred\PostNL\Service\DeliveryDateServiceInterface</i> <i>method</i>), 233
<code>buildGetDeliveryDateRequestREST()</code> (<i>Firstred\PostNL\Service\DeliveryDateServiceInterface</i> <i>method</i>), 231	<code>buildGetSignatureRequestREST()</code> (<i>Firstred\PostNL\Service\ShippingStatusService</i> <i>method</i>), 320
<code>buildGetDeliveryDateRequestSOAP()</code> (<i>Firstred\PostNL\Service\DeliveryDateService</i> <i>method</i>), 303	<code>buildGetSignatureRequestREST()</code> (<i>Firstred\PostNL\Service\ShippingStatusServiceInterface</i> <i>method</i>), 266
<code>buildGetDeliveryDateRequestSOAP()</code> (<i>Firstred\PostNL\Service\DeliveryDateServiceInterface</i> <i>method</i>), 231	<code>buildGetTimeframesRequestREST()</code> (<i>Firstred\PostNL\Service\TimeframeService</i> <i>method</i>), 309
<code>buildGetLocationRequestREST()</code> (<i>Firstred\PostNL\Service\LocationService</i> <i>method</i>), 286	<code>buildGetTimeframesRequestREST()</code> (<i>Firstred\PostNL\Service\TimeframeServiceInterface</i> <i>method</i>), 212
<code>buildGetLocationRequestREST()</code>	<code>buildGetTimeframesRequestSOAP()</code> (<i>Firstred\PostNL\Service\TimeframeService</i>

- method), [310](#)
- `buildGetTimeframesRequestSOAP()`
(*Firstred\PostNL\Service\TimeframeServiceInterface* method), [213](#)
- `buildGetUpdatedShipmentsRequestREST()`
(*Firstred\PostNL\Service\ShippingStatusServiceInterface* method), [323](#)
- `buildGetUpdatedShipmentsRequestREST()`
(*Firstred\PostNL\Service\ShippingStatusServiceInterface* method), [268](#)
- `Building` (*Firstred\PostNL\Entity\StatusAddress* property), [123](#)
- `Buildingname` (*Firstred\PostNL\Entity\Address* property), [140](#)
- `Buildingname` (*Firstred\PostNL\Entity\Response\ResponseAddress* property), [106](#)
- `buildSendShipmentRequestREST()`
(*Firstred\PostNL\Service\ShippingService* method), [290](#)
- `buildSendShipmentRequestREST()`
(*Firstred\PostNL\Service\ShippingServiceInterface* method), [256](#)
- ## C
- `cache` (*Firstred\PostNL\Service\AbstractService* property), [271](#)
- `cacheItem()` (*Firstred\PostNL\Service\AbstractService* method), [273](#)
- `cacheItem()` (*Firstred\PostNL\Service\ServiceInterface* method), [247](#)
- `callHandler()` (*Firstred\PostNL\Util\PendingPromise* method), [340](#)
- `cancel()` (*Firstred\PostNL\Util\PendingPromise* method), [339](#)
- `cancelFn` (*Firstred\PostNL\Util\PendingPromise* property), [338](#)
- `CancellationException` (class in *Firstred\PostNL\Exception\Promise*), [176](#)
- `Certificate` (*Firstred\PostNL\Entity\Customs* property), [165](#)
- `CertificateNr` (*Firstred\PostNL\Entity\Customs* property), [165](#)
- `Characteristic` (*Firstred\PostNL\Entity\ProductOption* property), [152](#)
- `checkEnvironment()` (*Firstred\PostNL\PostNL* method), [396](#)
- `checkIfFinished()` (*Firstred\PostNL\Util\EachPromise* method), [350](#)
- `CifDownException` (class in *Firstred\PostNL\Exception*), [181](#)
- `CifException` (class in *Firstred\PostNL\Exception*), [180](#)
- `City` (*Firstred\PostNL\Entity\Address* property), [140](#)
- `City` (*Firstred\PostNL\Entity\Location* property), [149](#)
- `City` (*Firstred\PostNL\Entity\Request\GetDeliveryDate* property), [73](#)
- `City` (*Firstred\PostNL\Entity\Request\GetSentDate* property), [52](#)
- `City` (*Firstred\PostNL\Entity\Response\ResponseAddress* property), [106](#)
- `City` (*Firstred\PostNL\Entity>StatusAddress* property), [123](#)
- `City` (*Firstred\PostNL\Entity\Timeframe* property), [162](#)
- `clearRequests()` (*Firstred\PostNL\HttpClient\BaseHttpClient* method), [195](#)
- `clearRequests()` (*Firstred\PostNL\HttpClient\ClientInterface* method), [191](#)
- `client` (*Firstred\PostNL\HttpClient\GuzzleClient* property), [207](#)
- `client` (*Firstred\PostNL\HttpClient\HTTPPlugClient* property), [198](#)
- `client` (*Firstred\PostNL\HttpClient\SymfonyHttpClient* property), [202](#)
- `ClientInterface` (interface in *Firstred\PostNL\HttpClient*), [189](#)
- `Code` (*Firstred\PostNL\Entity\ReasonNoTimeframe* property), [127](#)
- `Code` (*Firstred\PostNL\Entity\Response\CompleteStatusResponseEvent* property), [83](#)
- `Code` (*Firstred\PostNL\Entity\Sustainability* property), [161](#)
- `Code` (*Firstred\PostNL\Entity\Warning* property), [126](#)
- `CodingText` (*Firstred\PostNL\Entity\Response\ResponseShipment* property), [81](#)
- `CollectionLocation`
(*Firstred\PostNL\Entity\Customer* property), [142](#)
- `CollectionTimeStampEnd`
(*Firstred\PostNL\Entity\Shipment* property), [153](#)
- `CollectionTimeStampStart`
(*Firstred\PostNL\Entity\Shipment* property), [153](#)
- `CompanyName` (*Firstred\PostNL\Entity\Address* property), [140](#)
- `CompanyName` (*Firstred\PostNL\Entity\Response\ResponseAddress* property), [106](#)
- `CompanyName` (*Firstred\PostNL\Entity>StatusAddress* property), [123](#)
- `compareGuzzleVersion()` (*Firstred\PostNL\Util\Util* method), [352](#)
- `CompleteStatus` (class in *Firstred\PostNL\Entity\Request*), [60](#)
- `CompleteStatusByPhase` (class in *Firstred\PostNL\Entity\Request*), [68](#)
- `CompleteStatusByReference` (class in *Firstred\PostNL\Entity\Request*), [59](#)
- `CompleteStatusByStatus` (class in *Firstred\PostNL\Entity\Request*), [49](#)
- `completeStatusesREST()`
(*Firstred\PostNL\Service\ShippingStatusService* method), [316](#)
- `completeStatusesREST()`
(*Firstred\PostNL\Service\ShippingStatusServiceInterface* method), [261](#)
- `CompleteStatusResponse` (class in

- Firstred\PostNL\Entity\Response*), **94**
- `CompleteStatusResponseEvent` (class in *Firstred\PostNL\Entity\Response*), **82**
- `CompleteStatusResponseEvent` (*Firstred\PostNL\Entity\Event* property), **131**
- `CompleteStatusResponseOldStatus` (class in *Firstred\PostNL\Entity\Response*), **115**
- `CompleteStatusResponseShipment` (class in *Firstred\PostNL\Entity\Response*), **86**
- `completeStatusREST()` (*Firstred\PostNL\Service\ShippingStatusService* method), **314**
- `completeStatusREST()` (*Firstred\PostNL\Service\ShippingStatusService* method), **259**
- `concurrency` (*Firstred\PostNL\HttpClient\BaseHttpClient* property), **193**
- `concurrency` (*Firstred\PostNL\Util\EachPromise* property), **349**
- `Confirming` (class in *Firstred\PostNL\Entity\Request*), **72**
- `ConfirmingResponseShipment` (class in *Firstred\PostNL\Entity\Response*), **112**
- `ConfirmingService` (class in *Firstred\PostNL\Service*), **330**
- `confirmingService` (*Firstred\PostNL\PostNL* property), **359**
- `ConfirmingServiceInterface` (interface in *Firstred\PostNL\Service*), **214**
- `confirmShipment()` (*Firstred\PostNL\PostNL* method), **383**
- `confirmShipmentREST()` (*Firstred\PostNL\Service\ConfirmingService* method), **331**
- `confirmShipmentREST()` (*Firstred\PostNL\Service\ConfirmingServiceInterface* method), **214**
- `confirmShipments()` (*Firstred\PostNL\PostNL* method), **383**
- `confirmShipmentsSOAP()` (*Firstred\PostNL\Service\ConfirmingService* method), **333**
- `confirmShipmentsSOAP()` (*Firstred\PostNL\Service\ConfirmingServiceInterface* method), **217**
- `confirmShipmentsREST()` (*Firstred\PostNL\Service\ConfirmingService* method), **332**
- `confirmShipmentsREST()` (*Firstred\PostNL\Service\ConfirmingServiceInterface* method), **216**
- `confirmShipmentsSOAP()` (*Firstred\PostNL\Service\ConfirmingService* method), **334**
- `confirmShipmentsSOAP()` (*Firstred\PostNL\Service\ConfirmingServiceInterface* method), **217**
- `connectTimeout` (*Firstred\PostNL\HttpClient\BaseHttpClient* property), **193**
- `Contact` (class in *Firstred\PostNL\Entity*), **129**
- `ContactPerson` (*Firstred\PostNL\Entity\Customer* property), **142**
- `Contacts` (*Firstred\PostNL\Entity\Shipment* property), **153**
- `ContactType` (*Firstred\PostNL\Entity>Contact* property), **130**
- `Content` (class in *Firstred\PostNL\Entity*), **170**
- `Content` (*Firstred\PostNL\Entity\Content* property), **170**
- `Content` (*Firstred\PostNL\Entity\Customs* property), **165**
- `Content` (*Firstred\PostNL\Entity\Label* property), **135**
- `Content` (*Firstred\PostNL\Entity\Shipment* property), **153**
- `convertPsrRequestToSymfonyHttpClientRequestParams()` (*Firstred\PostNL\HttpClient\SymfonyHttpClient* method), **204**
- `convertSymfonyHttpClientResponseToPsrResponse()` (*Firstred\PostNL\HttpClient\SymfonyHttpClient* method), **204**
- `Coordinates` (class in *Firstred\PostNL\Entity*), **143**
- `Coordinates` (*Firstred\PostNL\Entity\Location* property), **149**
- `CoordinatesNorthWest` (class in *Firstred\PostNL\Entity*), **168**
- `CoordinatesNorthWest` (*Firstred\PostNL\Entity\Area* property), **129**
- `CoordinatesNorthWest` (*Firstred\PostNL\Entity\Location* property), **149**
- `CoordinatesSouthEast` (class in *Firstred\PostNL\Entity*), **120**
- `CoordinatesSouthEast` (*Firstred\PostNL\Entity\Area* property), **129**
- `CoordinatesSouthEast` (*Firstred\PostNL\Entity\Location* property), **149**
- `CostCenter` (*Firstred\PostNL\Entity\Shipment* property), **153**
- `countrycode` (*Firstred\PostNL\Entity\Address* property), **140**
- `CountryCode` (*Firstred\PostNL\Entity\Request\GetDeliveryDate* property), **74**
- `Countrycode` (*Firstred\PostNL\Entity\Request\GetLocationsInArea* property), **54**
- `Countrycode` (*Firstred\PostNL\Entity\Request\GetNearestLocations* property), **58**
- `CountryCode` (*Firstred\PostNL\Entity\Request\GetSentDate* property), **52**
- `Countrycode` (*Firstred\PostNL\Entity\Response\ResponseAddress* property), **106**
- `CountryCode` (*Firstred\PostNL\Entity>StatusAddress* property), **123**

CountryCode	(Firstred\PostNL\Entity\Timeframe property), 162	CurrentPhaseDescription	(Firstred\PostNL\Entity\OldStatus property), 121
CountryOfOrigin	(Firstred\PostNL\Entity\Content property), 170	currentService	(Firstred\PostNL\Entity\AbstractEntity property), 132
create()	(Firstred\PostNL\Entity\AbstractEntity method), 132	CurrentStatus	(class in Firstred\PostNL\Entity\Request), 67
createPromise()	(Firstred\PostNL\Util\EachPromise method), 350	CurrentStatusByPhase	(class in Firstred\PostNL\Entity\Request), 55
createRequest()	(Firstred\PostNL\Factory\GuzzleRequestFactory method), 188	CurrentStatusByReference	(class in Firstred\PostNL\Entity\Request), 64
createRequest()	(Firstred\PostNL\Factory\RequestFactoryInterface method), 187	CurrentStatusByStatus	(class in Firstred\PostNL\Entity\Request), 56
createResponse()	(Firstred\PostNL\Factory\GuzzleResponseFactory method), 187	currentStatusesREST()	(Firstred\PostNL\Service\ShippingStatusService method), 313
createResponse()	(Firstred\PostNL\Factory\ResponseFactoryInterface method), 186	currentStatusesREST()	(Firstred\PostNL\Service\ShippingStatusServiceInterface method), 259
createStream()	(Firstred\PostNL\Factory\GuzzleStreamFactory method), 189	CurrentStatusResponse	(class in Firstred\PostNL\Entity\Response), 93
createStream()	(Firstred\PostNL\Factory\StreamFactoryInterface method), 185	CurrentStatusResponseShipment	(class in Firstred\PostNL\Entity\Response), 108
createStreamFromFile()	(Firstred\PostNL\Factory\GuzzleStreamFactory method), 189	currentStatusREST()	(Firstred\PostNL\Service\ShippingStatusService method), 312
createStreamFromFile()	(Firstred\PostNL\Factory\StreamFactoryInterface method), 185	currentStatusREST()	(Firstred\PostNL\Service\ShippingStatusServiceInterface method), 257
createStreamFromResource()	(Firstred\PostNL\Factory\GuzzleStreamFactory method), 189	Customer	(class in Firstred\PostNL\Entity), 142
createStreamFromResource()	(Firstred\PostNL\Factory\StreamFactoryInterface method), 185	Customer	(Firstred\PostNL\Entity\Request\CompleteStatus property), 61
CreationDate	(Firstred\PostNL\Entity\Response\UpdatedShipment property), 100	Customer	(Firstred\PostNL\Entity\Request\CompleteStatusByPhase property), 68
critical()	(Firstred\PostNL\Util\DummyLogger method), 353	Customer	(Firstred\PostNL\Entity\Request\CompleteStatusByReference property), 59
CurlClient	(class in Firstred\PostNL\HttpClient), 199	Customer	(Firstred\PostNL\Entity\Request\CompleteStatusByStatus property), 49
Currency	(Firstred\PostNL\Entity\Amount property), 145	Customer	(Firstred\PostNL\Entity\Request\Confirming property), 72
Currency	(Firstred\PostNL\Entity\Customs property), 165	Customer	(Firstred\PostNL\Entity\Request\CurrentStatus property), 67
Currency	(Firstred\PostNL\Entity\Response\ResponseAmount property), 103	Customer	(Firstred\PostNL\Entity\Request\CurrentStatusByPhase property), 55
current()	(Firstred\PostNL\Entity\OpeningHours method), 173	Customer	(Firstred\PostNL\Entity\Request\CurrentStatusByReference property), 64
currentDay	(Firstred\PostNL\Entity\OpeningHours property), 172	Customer	(Firstred\PostNL\Entity\Request\CurrentStatusByStatus property), 56
CurrentOldStatusCode	(Firstred\PostNL\Entity\OldStatus property), 121	Customer	(Firstred\PostNL\Entity\Request\GenerateBarcode property), 66
CurrentOldStatusDescription	(Firstred\PostNL\Entity\OldStatus property), 121	Customer	(Firstred\PostNL\Entity\Request\GenerateLabel property), 70
CurrentOldStatusTimeStamp	(Firstred\PostNL\Entity\OldStatus property), 122	Customer	(Firstred\PostNL\Entity\Request\GetSignature property), 50
CurrentPhaseCode	(Firstred\PostNL\Entity\OldStatus property), 121	Customer	(Firstred\PostNL\Entity\Request\SendShipment property), 71
		Customer	(Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment property), 86

- Customer (*Firstred\PostNL\Entity\Shipment* property), **153**
- customer (*Firstred\PostNL\PostNL* property), **358**
- CustomerCode (*Firstred\PostNL\Entity\Customer* property), **142**
- CustomerCode (*Firstred\PostNL\Entity\Response\UpdatedShipmentResponse* property), **100**
- CustomerNumber (*Firstred\PostNL\Entity\Customer* property), **142**
- CustomerNumber (*Firstred\PostNL\Entity\Response\UpdatedShipmentResponse* property), **100**
- CustomerOrderNumber (*Firstred\PostNL\Entity\Shipment* property), **153**
- Customs (class in *Firstred\PostNL\Entity*), **165**
- Customs (*Firstred\PostNL\Entity\Shipment* property), **153**
- CutOffTime (class in *Firstred\PostNL\Entity*), **169**
- CutOffTimes (*Firstred\PostNL\Entity\Request\GetDeliveryTime* property), **74**
- D**
- Date (*Firstred\PostNL\Entity\ReasonNoTimeframe* property), **127**
- Date (*Firstred\PostNL\Entity\Timeframe* property), **162**
- Date (*Firstred\PostNL\Entity\TimeframeTimeFrame* property), **167**
- DateFrom (*Firstred\PostNL\Entity\Shipment* property), **154**
- DateTo (*Firstred\PostNL\Entity\Shipment* property), **154**
- Day (*Firstred\PostNL\Entity\CutOffTime* property), **169**
- debug() (*Firstred\PostNL\Util\DummyLogger* method), **353**
- defaultDateFormat() (*Firstred\PostNL\Service\AbstractService* method), **274**
- defaultOptions (*Firstred\PostNL\HttpClient\CurlClient* property), **200**
- defaultOptions (*Firstred\PostNL\HttpClient\GuzzleClient* property), **207**
- defaultOptions (*Firstred\PostNL\HttpClient\MockClient* property), **205**
- defaultOptions (*Firstred\PostNL\HttpClient\SymfonyHttpClient* property), **202**
- defaultProperties (*Firstred\PostNL\Entity\AbstractEntity* property), **132**
- defaultProperties (*Firstred\PostNL\Entity\Address* property), **139**
- defaultProperties (*Firstred\PostNL\Entity\Amount* property), **145**
- defaultProperties (*Firstred\PostNL\Entity\Area* property), **129**
- defaultProperties (*Firstred\PostNL\Entity\Barcode* property), **147**
- defaultProperties (*Firstred\PostNL\Entity>Contact* property), **130**
- defaultProperties (*Firstred\PostNL\Entity\Content* property), **170**
- defaultProperties (*Firstred\PostNL\Entity\Coordinates* property), **143**
- defaultProperties (*Firstred\PostNL\Entity\CoordinatesNorthWest* property), **168**
- defaultProperties (*Firstred\PostNL\Entity\CoordinatesSouthEast* property), **121**
- defaultProperties (*Firstred\PostNL\Entity\Customer* property), **142**
- defaultProperties (*Firstred\PostNL\Entity\Customs* property), **165**
- defaultProperties (*Firstred\PostNL\Entity\CutOffTime* property), **169**
- defaultProperties (*Firstred\PostNL\Entity\Dimension* property), **146**
- defaultProperties (*Firstred\PostNL\Entity\Event* property), **131**
- defaultProperties (*Firstred\PostNL\Entity\Expectation* property), **136**
- defaultProperties (*Firstred\PostNL\Entity\Group* property), **138**
- defaultProperties (*Firstred\PostNL\Entity\Label* property), **135**
- defaultProperties (*Firstred\PostNL\Entity\Location* property), **148**
- defaultProperties (*Firstred\PostNL\Entity\Message\LabellingMessage* property), **46**
- defaultProperties (*Firstred\PostNL\Entity\Message\Message* property), **46**
- defaultProperties (*Firstred\PostNL\Entity\OldStatus* property), **121**
- defaultProperties (*Firstred\PostNL\Entity\OpeningHours* property), **172**
- defaultProperties (*Firstred\PostNL\Entity\ProductOption* property), **152**
- defaultProperties (*Firstred\PostNL\Entity\ReasonNoTimeframe* property), **127**
- defaultProperties (*Firstred\PostNL\Entity\Request\CompleteStatus* property), **61**
- defaultProperties (*Firstred\PostNL\Entity\Request\CompleteStatusBy* property), **68**
- defaultProperties (*Firstred\PostNL\Entity\Request\CompleteStatusBy* property), **59**
- defaultProperties (*Firstred\PostNL\Entity\Request\CompleteStatusBy* property), **49**
- defaultProperties (*Firstred\PostNL\Entity\Request\Confirming* property), **72**
- defaultProperties (*Firstred\PostNL\Entity\Request\CurrentStatus* property), **67**
- defaultProperties (*Firstred\PostNL\Entity\Request\CurrentStatusByP* property), **55**
- defaultProperties (*Firstred\PostNL\Entity\Request\CurrentStatusByR* property), **64**
- defaultProperties (*Firstred\PostNL\Entity\Request\CurrentStatusByS* property), **56**
- defaultProperties (*Firstred\PostNL\Entity\Request\GenerateBarcode* property), **66**

`defaultProperties (Firstred\PostNL\Entity\Request\GetDefaultProperties (Firstred\PostNL\Entity\Response\ResponseLocation property), 70`
`defaultProperties (Firstred\PostNL\Entity\Request\GetDefaultProperties (Firstred\PostNL\Entity\Response\ResponseShipment property), 73`
`defaultProperties (Firstred\PostNL\Entity\Request\GetDefaultProperties (Firstred\PostNL\Entity\Response\ResponseTimeframe property), 48`
`defaultProperties (Firstred\PostNL\Entity\Request\GetDefaultProperties (Firstred\PostNL\Entity\Response\SendShipmentRequest property), 54`
`defaultProperties (Firstred\PostNL\Entity\Request\GetDefaultProperties (Firstred\PostNL\Entity\Response\SignatureResponse property), 58`
`defaultProperties (Firstred\PostNL\Entity\Request\GetDefaultProperties (Firstred\PostNL\Entity\Response\UpdatedShipment property), 52`
`defaultProperties (Firstred\PostNL\Entity\Request\GetDefaultProperties (Firstred\PostNL\Entity\Shipment property), 77`
`defaultProperties (Firstred\PostNL\Entity\Request\GetDefaultProperties (Firstred\PostNL\Entity\Signature property), 50`
`defaultProperties (Firstred\PostNL\Entity\Request\GetDefaultProperties (Firstred\PostNL\Entity\SOAP\Body property), 62`
`defaultProperties (Firstred\PostNL\Entity\Request\SendShipmentProperties (Firstred\PostNL\Entity\SOAP\Envelope property), 71`
`defaultProperties (Firstred\PostNL\Entity\Response\GetDefaultProperties (Firstred\PostNL\Entity\SOAP\Security property), 94`
`defaultProperties (Firstred\PostNL\Entity\Response\GetDefaultProperties (Firstred\PostNL\Entity\SOAP\UsernameToken property), 83`
`defaultProperties (Firstred\PostNL\Entity\Response\GetDefaultProperties (Firstred\PostNL\Entity\Status property), 115`
`defaultProperties (Firstred\PostNL\Entity\Response\GetDefaultProperties (Firstred\PostNL\Entity>StatusAddress property), 86`
`defaultProperties (Firstred\PostNL\Entity\Response\GetDefaultProperties (Firstred\PostNL\Entity\Sustainability property), 112`
`defaultProperties (Firstred\PostNL\Entity\Response\GetDefaultProperties (Firstred\PostNL\Entity\Timeframe property), 93`
`defaultProperties (Firstred\PostNL\Entity\Response\GetDefaultProperties (Firstred\PostNL\Entity\Timeframes property), 108`
`defaultProperties (Firstred\PostNL\Entity\Response\GetDefaultProperties (Firstred\PostNL\Entity\TimeframeTimeFrame property), 91`
`defaultProperties (Firstred\PostNL\Entity\Response\GetDefaultProperties (Firstred\PostNL\Entity\Warning property), 105`
`defaultProperties (Firstred\PostNL\Entity\Response\GetDeliveryAddressResponse (Firstred\PostNL\Entity\Shipment property), 113`
`defaultProperties (Firstred\PostNL\Entity\Response\GetDeliveryDateResponse (Firstred\PostNL\Entity\Location property), 92`
`defaultProperties (Firstred\PostNL\Entity\Response\GetDeliveryDate (Firstred\PostNL\Entity\Request\GetSentDate property), 78`
`defaultProperties (Firstred\PostNL\Entity\Response\GetDeliveryDate (Firstred\PostNL\Entity\Response\CompleteStatusResponse property), 80`
`defaultProperties (Firstred\PostNL\Entity\Response\GetDeliveryDate (Firstred\PostNL\Entity\Response\CurrentStatusResponse property), 99`
`defaultProperties (Firstred\PostNL\Entity\Response\GetDeliveryDate (Firstred\PostNL\Entity\Response\GetDeliveryDateResponse property), 102`
`defaultProperties (Firstred\PostNL\Entity\Response\GetDeliveryDate (Firstred\PostNL\Entity\Shipment property), 98`
`defaultProperties (Firstred\PostNL\Entity\Response\DeliveryDateService (class in Firstred\PostNL\Service), 297`
`defaultProperties (Firstred\PostNL\Entity\Response\DeliveryDateService (Firstred\PostNL\PostNL property), 103`
`defaultProperties (Firstred\PostNL\Entity\Response\DeliveryDateServiceInterface (interface in Firstred\PostNL\Service), 226`

DeliveryOptions (Firstred\PostNL\Entity\Location property), 148	doRequest() (Firstred\PostNL\HttpClient\SymfonyHttpClient method), 203
DeliveryOptions (Firstred\PostNL\Entity\Response\ResponseLocation property), 95	doRequest() (Firstred\PostNL\HttpClient\BaseHttpClient method), 195
DeliveryTimeStampEnd (Firstred\PostNL\Entity\Shipment property), 154	doRequests() (Firstred\PostNL\HttpClient\ClientInterface method), 191
DeliveryTimeStampStart (Firstred\PostNL\Entity\Shipment property), 154	doRequests() (Firstred\PostNL\HttpClient\CurlClient method), 200
Department (Firstred\PostNL\Entity\Address property), 140	doRequests() (Firstred\PostNL\HttpClient\GuzzleClient method), 209
Department (Firstred\PostNL\Entity\Response\ResponseAddress property), 106	doRequests() (Firstred\PostNL\HttpClient\HTTPPlugClient method), 198
DepartmentName (Firstred\PostNL\Entity>StatusAddress property), 123	doRequests() (Firstred\PostNL\HttpClient\MockClient method), 206
Description (Firstred\PostNL\Entity\Content property), 170	doRequests() (Firstred\PostNL\HttpClient\SymfonyHttpClient method), 203
Description (Firstred\PostNL\Entity\ProductOption property), 152	DownPartnerBarcode (Firstred\PostNL\Entity\Response\ResponseShipment property), 81
Description (Firstred\PostNL\Entity\ReasonNoTimeframe property), 127	DownPartnerBarcode (Firstred\PostNL\Entity\Shipment property), 154
Description (Firstred\PostNL\Entity\Response\CompleteStatusResponse property), 83	DownPartnerEvent (Firstred\PostNL\Entity\Location property), 149
Description (Firstred\PostNL\Entity\Sustainability property), 161	DownPartnerID (Firstred\PostNL\Entity\Response\ResponseLocation property), 96
Description (Firstred\PostNL\Entity\Warning property), 126	DownPartnerID (Firstred\PostNL\Entity\Response\ResponseShipment property), 81
DestinationLocationCode (Firstred\PostNL\Entity\Response\CompleteStatusResponse property), 83	DownPartnerID (Firstred\PostNL\Entity\Shipment property), 154
Dimension (class in Firstred\PostNL\Entity), 146	DownPartnerLocation (Firstred\PostNL\Entity\Location property), 149
Dimension (Firstred\PostNL\Entity\Response\CompleteStatusResponse property), 86	DownPartnerLocation (Firstred\PostNL\Entity\Shipment property), 154
Dimension (Firstred\PostNL\Entity\Response\CurrentStatusResponse property), 109	DownPartnerLocation (Firstred\PostNL\Entity\Response\ResponseLocation property), 96
Dimension (Firstred\PostNL\Entity\Shipment property), 154	DownPartnerLocation (Firstred\PostNL\Entity\Response\ResponseShipment property), 81
disableShutdown() (Firstred\PostNL\Util\TaskQueue method), 347	DownPartnerLocation (Firstred\PostNL\Entity\Shipment property), 154
Distance (Firstred\PostNL\Entity\Response\ResponseLocation property), 95	DummyLogger (class in Firstred\PostNL\Util), 352
District (Firstred\PostNL\Entity>StatusAddress property), 123	E
Doorcode (Firstred\PostNL\Entity\Address property), 140	each() (Firstred\PostNL\Util\PromiseTool method), 345
Doorcode (Firstred\PostNL\Entity\Response\ResponseAddress property), 106	eachLimit() (Firstred\PostNL\Util\PromiseTool method), 345
doRequest() (Firstred\PostNL\HttpClient\ClientInterface method), 191	eachLimitAll() (Firstred\PostNL\Util\PromiseTool method), 345
doRequest() (Firstred\PostNL\HttpClient\CurlClient method), 200	EachPromise (class in Firstred\PostNL\Util), 348
doRequest() (Firstred\PostNL\HttpClient\GuzzleClient method), 208	Email (Firstred\PostNL\Entity>Contact property), 130
doRequest() (Firstred\PostNL\HttpClient\HTTPPlugClient method), 198	Email (Firstred\PostNL\Entity\Customer property), 142
doRequest() (Firstred\PostNL\HttpClient\MockClient method), 206	emergency() (Firstred\PostNL\Util\DummyLogger method), 353

- enableShutdown (*Firstred\PostNL\Util\TaskQueue* property), [347](#)
- EndDate (*Firstred\PostNL\Entity\Timeframe* property), [162](#)
- Envelope (class in *Firstred\PostNL\Entity\SOAP*), [119](#)
- error() (*Firstred\PostNL\Util\DummyLogger* method), [353](#)
- ETAFrom (*Firstred\PostNL\Entity\Expectation* property), [136](#)
- ETATo (*Firstred\PostNL\Entity\Expectation* property), [136](#)
- Event (class in *Firstred\PostNL\Entity*), [131](#)
- Events (*Firstred\PostNL\Entity\Response\CompleteStatusResponse* property), [86](#)
- Events (*Firstred\PostNL\Entity\Shipment* property), [154](#)
- exceptionFor() (*Firstred\PostNL\Util\PromiseTool* method), [342](#)
- Expectation (class in *Firstred\PostNL\Entity*), [135](#)
- Expectation (*Firstred\PostNL\Entity\Response\CompleteStatusResponse* property), [86](#)
- Expectation (*Firstred\PostNL\Entity\Response\CurrentStatusResponse* property), [109](#)
- ## F
- findBarcodeSerie() (*Firstred\PostNL\PostNL* method), [396](#)
- findCurrentDayString() (*Firstred\PostNL\Entity\OpeningHours* method), [174](#)
- FirstName (*Firstred\PostNL\Entity\Address* property), [140](#)
- FirstName (*Firstred\PostNL\Entity\Response\ResponseAddress* property), [106](#)
- FirstName (*Firstred\PostNL\Entity>StatusAddress* property), [123](#)
- Firstred\PostNL (namespace), [355](#)
- Firstred\PostNL\Entity (namespace), [120–122, 125, 126, 128, 129, 131, 134, 135, 137–139, 142–144, 146–148, 151, 152, 158, 161, 162, 165, 167–171](#)
- Firstred\PostNL\Entity\Message (namespace), [45, 46](#)
- Firstred\PostNL\Entity\Request (namespace), [47, 49–51, 54–57, 59, 60, 62, 64, 65, 67–69, 71–73, 76](#)
- Firstred\PostNL\Entity\Response (namespace), [78, 79, 81, 82, 85, 86, 90–95, 98, 100, 101, 103–105, 108, 112, 114, 115](#)
- Firstred\PostNL\Entity\SOAP (namespace), [117–119](#)
- Firstred\PostNL\Exception (namespace), [176, 178–184](#)
- Firstred\PostNL\Exception\Promise (namespace), [175, 176](#)
- Firstred\PostNL\Factory (namespace), [184, 186–188](#)
- Firstred\PostNL\HttpClient (namespace), [189, 192, 197, 199, 201, 205, 207](#)
- Firstred\PostNL\Service (namespace), [209, 214, 220, 226, 234, 247, 248, 254, 257, 270, 275, 288, 291, 297, 306, 311, 324, 330](#)
- Firstred\PostNL\Util (namespace), [337, 338, 340, 341, 346, 348, 350, 352, 354, 355](#)
- FlexibleEntityTrait (trait in *Firstred\PostNL\Util*), [355](#)
- Floor (*Firstred\PostNL\Entity\Address* property), [140](#)
- Floor (*Firstred\PostNL\Entity\Response\ResponseAddress* property), [106](#)
- Floor (*Firstred\PostNL\Entity>StatusAddress* property), [123](#)
- Friday (*Firstred\PostNL\Entity\OpeningHours* property), [172](#)
- From (*Firstred\PostNL\Entity\ReasonNoTimeframe* property), [127](#)
- From (*Firstred\PostNL\Entity\TimeframeTimeFrame* property), [127](#)
- generate() (*Firstred\PostNL\Util\UUID* method), [340](#)
- GenerateBarcode (class in *Firstred\PostNL\Entity\Request*), [65](#)
- generateBarcode() (*Firstred\PostNL\PostNL* method), [366](#)
- generateBarcodeByCountryCode() (*Firstred\PostNL\PostNL* method), [368](#)
- GenerateBarcodeResponse (class in *Firstred\PostNL\Entity\Response*), [91](#)
- GenerateBarcodeResponse (class in *Firstred\PostNL\Entity\SOAP\Body* property), [117](#)
- generateBarcodeREST() (*Firstred\PostNL\Service\BarcodeService* method), [292](#)
- generateBarcodeREST() (*Firstred\PostNL\Service\BarcodeServiceInterface* method), [249](#)
- generateBarcodesByCountryCodes() (*Firstred\PostNL\PostNL* method), [369](#)
- generateBarcodesSOAP() (*Firstred\PostNL\Service\BarcodeService* method), [293](#)
- generateBarcodesSOAP() (*Firstred\PostNL\Service\BarcodeServiceInterface* method), [251](#)
- generateBarcodesREST() (*Firstred\PostNL\Service\BarcodeService* method), [293](#)
- generateBarcodesREST() (*Firstred\PostNL\Service\BarcodeServiceInterface* method), [250](#)
- generateBarcodesSOAP() (*Firstred\PostNL\Service\BarcodeService* method), [294](#)

<code>generateBarcodesSOAP()</code> (<i>Firstred\PostNL\Service\BarcodeServiceInterface</i> method), 251	<code>getCompleteStatusStatusCode()</code> (<i>Firstred\PostNL\Entity\Status</i> method), 160
<code>GenerateLabel</code> (class in <i>Firstred\PostNL\Entity\Request</i>), 69	<code>getCompleteStatusStatusDescription()</code> (<i>Firstred\PostNL\Entity\Status</i> method), 160
<code>generateLabel()</code> (<i>Firstred\PostNL\PostNL</i> method), 377	<code>getCompleteStatusTimeStamp()</code> (<i>Firstred\PostNL\Entity\Status</i> method), 160
<code>GenerateLabelResponse</code> (class in <i>Firstred\PostNL\Entity\Response</i>), 104	<code>getConcurrency()</code> (<i>Firstred\PostNL\HttpClient\BaseHttpClient</i> method), 195
<code>generateLabelREST()</code> (<i>Firstred\PostNL\Service\LabellingService</i> method), 325	<code>getConfirmingService()</code> (<i>Firstred\PostNL\PostNL</i> method), 364
<code>generateLabelREST()</code> (<i>Firstred\PostNL\Service\LabellingServiceInterface</i> method), 221	<code>getConnectTimeout()</code> (<i>Firstred\PostNL\HttpClient\BaseHttpClient</i> method), 193
<code>generateLabels()</code> (<i>Firstred\PostNL\PostNL</i> method), 379	<code>getContentType()</code> (<i>Firstred\PostNL\Entity\Label</i> method), 135
<code>generateLabelSOAP()</code> (<i>Firstred\PostNL\Service\LabellingService</i> method), 327	<code>getCurrentStatus()</code> (<i>Firstred\PostNL\PostNL</i> method), 384
<code>generateLabelSOAP()</code> (<i>Firstred\PostNL\Service\LabellingServiceInterface</i> method), 223	<code>getCurrentStatusPhaseCode()</code> (<i>Firstred\PostNL\Entity\Status</i> method), 159
<code>generateLabelsREST()</code> (<i>Firstred\PostNL\Service\LabellingService</i> method), 326	<code>getCurrentStatusPhaseDescription()</code> (<i>Firstred\PostNL\Entity\Status</i> method), 159
<code>generateLabelsREST()</code> (<i>Firstred\PostNL\Service\LabellingServiceInterface</i> method), 222	<code>getCurrentStatusStatusCode()</code> (<i>Firstred\PostNL\Entity\Status</i> method), 159
<code>generateLabelsSOAP()</code> (<i>Firstred\PostNL\Service\LabellingService</i> method), 327	<code>getCurrentStatusStatusDescription()</code> (<i>Firstred\PostNL\Entity\Status</i> method), 159
<code>generateLabelsSOAP()</code> (<i>Firstred\PostNL\Service\LabellingServiceInterface</i> method), 223	<code>getCurrentStatusTimeStamp()</code> (<i>Firstred\PostNL\Entity\Status</i> method), 160
<code>getApiKey()</code> (<i>Firstred\PostNL\PostNL</i> method), 360	<code>getCustomer()</code> (<i>Firstred\PostNL\PostNL</i> method), 361
<code>getBarcodeService()</code> (<i>Firstred\PostNL\PostNL</i> method), 364	<code>GetDeliveryDate</code> (class in <i>Firstred\PostNL\Entity\Request</i>), 73
<code>getBody()</code> (<i>Firstred\PostNL\Exception\ApiConnectionException</i> method), 177	<code>GetDeliveryDate</code> (<i>Firstred\PostNL\Entity\Request\GetDeliveryDate</i> property), 74
<code>getCache()</code> (<i>Firstred\PostNL\Service\AbstractService</i> method), 274	<code>getDeliveryDate()</code> (<i>Firstred\PostNL\PostNL</i> method), 393
<code>getCache()</code> (<i>Firstred\PostNL\Service\ServiceInterface</i> method), 248	<code>getDeliveryDate()</code> (<i>Firstred\PostNL\Util\Util</i> method), 351
<code>getClient()</code> (<i>Firstred\PostNL\HttpClient\GuzzleClient</i> method), 208	<code>GetDeliveryDateResponse</code> (class in <i>Firstred\PostNL\Entity\Response</i>), 112
<code>getClient()</code> (<i>Firstred\PostNL\HttpClient\HTTPPlugClient</i> method), 199	<code>getDeliveryDateREST()</code> (<i>Firstred\PostNL\Service\DeliveryDateService</i> method), 298
<code>getClient()</code> (<i>Firstred\PostNL\HttpClient\SymfonyHttpClient</i> method), 202	<code>getDeliveryDateREST()</code> (<i>Firstred\PostNL\Service\DeliveryDateServiceInterface</i> method), 227
<code>getCompleteStatus()</code> (<i>Firstred\PostNL\PostNL</i> method), 391	<code>getDeliveryDateService()</code> (<i>Firstred\PostNL\PostNL</i> method), 365
<code>getCompleteStatusPhaseCode()</code> (<i>Firstred\PostNL\Entity\Status</i> method), 160	<code>getDeliveryDateSOAP()</code> (<i>Firstred\PostNL\Service\DeliveryDateService</i> method), 299
<code>getCompleteStatusPhaseDescription()</code> (<i>Firstred\PostNL\Entity\Status</i> method), 160	

getDeliveryDateSOAP() (*Firstred\PostNL\Service\DeliveryDateServiceInterface* method), **282**
getFullyQualifiedEntityClassName() (*Firstred\PostNL\Entity\AbstractEntity* method), **134**
getHandler() (*Firstred\PostNL\HttpClient\MockClient* method), **206**
getHeaders() (*Firstred\PostNL\Exception\ApiConnectionException* property), **92**
getHolidaysForYear() (*Firstred\PostNL\Util\Util* method), **352**
getHttpClient() (*Firstred\PostNL\PostNL* method), **362**
getInstance() (*Firstred\PostNL\HttpClient\ClientInterface* method), **190**
getInstance() (*Firstred\PostNL\HttpClient\CurlClient* method), **200**
getInstance() (*Firstred\PostNL\HttpClient\GuzzleClient* method), **208**
getInstance() (*Firstred\PostNL\HttpClient\HTTPPlugClient* method), **199**
getInstance() (*Firstred\PostNL\HttpClient\MockClient* method), **205**
getInstance() (*Firstred\PostNL\HttpClient\SymfonyHttpClient* method), **202**
getJsonBody() (*Firstred\PostNL\Exception\ApiConnectionException* method), **177**
getLabellingService() (*Firstred\PostNL\PostNL* method), **364**
getLocation (class in *Firstred\PostNL\Entity\Request*), **47**
getLocation() (*Firstred\PostNL\PostNL* method), **396**
getLocationREST() (*Firstred\PostNL\Service\LocationService* method), **281**
getLocationREST() (*Firstred\PostNL\Service\LocationServiceInterface* method), **239**
getLocationService() (*Firstred\PostNL\PostNL* method), **366**
GetLocationsInArea (class in *Firstred\PostNL\Entity\Request*), **54**
getLocationsInArea() (*Firstred\PostNL\PostNL* method), **396**
GetLocationsInAreaResponse (class in *Firstred\PostNL\Entity\Response*), **92**
getLocationsInAreaREST() (*Firstred\PostNL\Service\LocationService* method), **278**
getLocationsInAreaREST() (*Firstred\PostNL\Service\LocationServiceInterface* method), **237**
getLocationsInAreaSOAP() (*Firstred\PostNL\Service\LocationService* method), **280**
getLocationsInAreaSOAP() (*Firstred\PostNL\Service\LocationServiceInterface* method), **239**
getLocationSOAP() (*Firstred\PostNL\Service\LocationService* method), **282**
getLocationSOAP() (*Firstred\PostNL\Service\LocationServiceInterface* method), **241**
GetLocationsResult (class in *Firstred\PostNL\Entity\Response*), **78**
GetLocationsResult (*Firstred\PostNL\Entity\Response\GetLocationsInAreaResponse* property), **92**
GetLocationsResult (*Firstred\PostNL\Entity\Response\GetNearestLocationsResponse* property), **80**
getLogger() (*Firstred\PostNL\HttpClient\BaseHttpClient* method), **194**
getLogger() (*Firstred\PostNL\HttpClient\ClientInterface* method), **190**
getLogger() (*Firstred\PostNL\PostNL* method), **362**
getMaxRetries() (*Firstred\PostNL\HttpClient\BaseHttpClient* method), **194**
getMessage() (*Firstred\PostNL\Entity\Request\CompleteStatus* method), **61**
getMessage() (*Firstred\PostNL\Entity\Request\CompleteStatusByReference* method), **60**
getMessage() (*Firstred\PostNL\Entity\Request\CurrentStatus* method), **68**
getMessage() (*Firstred\PostNL\Entity\Request\CurrentStatusByReference* method), **65**
getMessage() (*Firstred\PostNL\Entity\Request\GenerateBarcode* method), **66**
getMessage() (*Firstred\PostNL\Entity\Request\GetDeliveryDate* method), **76**
getMessage() (*Firstred\PostNL\Entity\Request\GetLocation* method), **48**
getMessage() (*Firstred\PostNL\Entity\Request\GetNearestLocations* method), **58**
getMessage() (*Firstred\PostNL\Entity\Request\GetSentDateRequest* method), **77**
getMessage() (*Firstred\PostNL\Entity\Request\GetSignature* method), **51**
getMessage() (*Firstred\PostNL\Entity\Request\GetTimeframes* method), **63**
getMessagesDescriptionsAndCodes() (*Firstred\PostNL\Exception\CifException* method), **181**
getMode() (*Firstred\PostNL\PostNL* method), **361**
GetNearestLocations (class in *Firstred\PostNL\Entity\Request*), **57**
getNearestLocations() (*Firstred\PostNL\PostNL* method), **394**
GetNearestLocationsResponse (class in *Firstred\PostNL\Entity\Response*), **79**
getNearestLocationsREST() (*Firstred\PostNL\Service\LocationService* method), **276**
getNearestLocationsREST() (*Firstred\PostNL\Service\LocationServiceInterface* method), **235**
getNearestLocationsSOAP()

- (*Firstred\PostNL\Service\LocationService* method), [277](#)
- `getNearestLocationsSOAP()` (*Firstred\PostNL\Service\LocationServiceInterface* method), [236](#)
- `getOption()` (*Firstred\PostNL\HttpClient\GuzzleClient* method), [208](#)
- `getOption()` (*Firstred\PostNL\HttpClient\MockClient* method), [206](#)
- `getOption()` (*Firstred\PostNL\HttpClient\SymfonyHttpClient* method), [203](#)
- `getPdfSizeAndOrientation()` (*Firstred\PostNL\Util\Util* method), [351](#)
- `getReason()` (*Firstred\PostNL\Exception\Promise\RejectionException* method), [175](#)
- `getRequestFactory()` (*Firstred\PostNL\HttpClient\BaseHttpClient* method), [196](#)
- `getRequestFactory()` (*Firstred\PostNL\PostNL* method), [362](#)
- `getResponse()` (*Firstred\PostNL\Exception\HttpClientException* method), [183](#)
- `getResponse()` (*Firstred\PostNL\Exception\ResponseException* method), [180](#)
- `getResponseFactory()` (*Firstred\PostNL\HttpClient\BaseHttpClient* method), [196](#)
- `getResponseFactory()` (*Firstred\PostNL\PostNL* method), [363](#)
- `getResponseText()` (*Firstred\PostNL\Service\AbstractService* method), [273](#)
- `getRestApiKey()` (*Firstred\PostNL\PostNL* method), [360](#)
- `getSandbox()` (*Firstred\PostNL\PostNL* method), [361](#)
- `GetSentDate` (class in *Firstred\PostNL\Entity\Request*), [51](#)
- `GetSentDate` (*Firstred\PostNL\Entity\Request\GetSentDateRequest* method), [339](#)
- `GetSentDate` (property), [77](#)
- `getSentDate()` (*Firstred\PostNL\PostNL* method), [393](#)
- `GetSentDateRequest` (class in *Firstred\PostNL\Entity\Request*), [76](#)
- `GetSentDateResponse` (class in *Firstred\PostNL\Entity\Response*), [98](#)
- `getSentDateREST()` (*Firstred\PostNL\Service\Delivery\GetSentDateREST* method), [300](#)
- `getSentDateREST()` (*Firstred\PostNL\Service\Delivery\GetSentDateREST* method), [229](#)
- `getSentDateSOAP()` (*Firstred\PostNL\Service\Delivery\GetSentDateSOAP* method), [302](#)
- `getSentDateSOAP()` (*Firstred\PostNL\Service\Delivery\GetSentDateSOAP* method), [230](#)
- `getShippingDate()` (*Firstred\PostNL\Util\Util* method), [351](#)
- `getShippingDaysRemaining()` (*Firstred\PostNL\Util\Util* method), [351](#)
- `getShippingService()` (*Firstred\PostNL\PostNL* method), [366](#)
- `getShippingStatusByBarcode()` (*Firstred\PostNL\PostNL* method), [386](#)
- `getShippingStatusByReference()` (*Firstred\PostNL\PostNL* method), [388](#)
- `getShippingStatusesByBarcodes()` (*Firstred\PostNL\PostNL* method), [387](#)
- `getShippingStatusesByReferences()` (*Firstred\PostNL\PostNL* method), [390](#)
- `getShippingStatusService()` (*Firstred\PostNL\PostNL* method), [365](#)
- `GetSignature` (class in *Firstred\PostNL\Entity\Request*), [50](#)
- `getSignature()` (*Firstred\PostNL\PostNL* method), [389](#)
- `getSignatureByBarcode()` (*Firstred\PostNL\PostNL* method), [392](#)
- `GetSignatureResponseSignature` (class in *Firstred\PostNL\Entity\Response*), [101](#)
- `GetSignatureResponseSignature` (*Firstred\PostNL\Entity\Signature* property), [144](#)
- `getSignatureREST()` (*Firstred\PostNL\Service\ShippingStatusService* method), [316](#)
- `getSignatureREST()` (*Firstred\PostNL\Service\ShippingStatusServiceInterface* method), [262](#)
- `getSignaturesByBarcodes()` (*Firstred\PostNL\PostNL* method), [393](#)
- `getSignaturesREST()` (*Firstred\PostNL\Service\ShippingStatusService* method), [318](#)
- `getSignaturesREST()` (*Firstred\PostNL\Service\ShippingStatusServiceInterface* method), [263](#)
- `getState()` (*Firstred\PostNL\Util\PendingPromise* method), [339](#)
- `getStreamFactory()` (*Firstred\PostNL\HttpClient\BaseHttpClient* method), [196](#)
- `getStreamFactory()` (*Firstred\PostNL\PostNL* method), [363](#)
- `getTimeframe()` (*Firstred\PostNL\Entity\Request\GetTimeframes* method), [63](#)
- `GetTimeframes` (class in *Firstred\PostNL\Entity\Request*), [62](#)
- `GetTimeframes` (*Firstred\PostNL\Entity\Request\GetTimeframes* method), [63](#)
- `getTimeframes()` (*Firstred\PostNL\PostNL* method), [394](#)
- `getTimeframesAndNearestLocations()` (*Firstred\PostNL\PostNL* method), [394](#)
- `getTimeframeService()` (*Firstred\PostNL\PostNL* method), [365](#)
- `getTimeframesREST()` (*Firstred\PostNL\Service\TimeframeService* method), [307](#)
- `getTimeframesREST()`

<code>(Firstred\PostNL\Service\TimeframeServiceInterface method), 210</code>	<code>GuzzleResponseFactory</code> (class in <code>Firstred\PostNL\Factory</code>), 187
<code>getTimeframesSOAP()</code> (<code>Firstred\PostNL\Service\TimeframeService method</code>), 308	<code>GuzzleStreamFactory</code> (class in <code>Firstred\PostNL\Factory</code>), 188
<code>getTimeframesSOAP()</code> (<code>Firstred\PostNL\Service\TimeframeServiceInterface method</code>), 211	H
<code>getTimeout()</code> (<code>Firstred\PostNL\HttpClient\BaseHttpClient method</code>), 193	<code>handleAsNonDeliverable</code> (<code>Firstred\PostNL\Entity\Customs property</code>), 165
<code>getToken()</code> (<code>Firstred\PostNL\PostNL method</code>), 360	<code>handleCurlError()</code> (<code>Firstred\PostNL\HttpClient\CurlClient method</code>), 201
<code>getTtl()</code> (<code>Firstred\PostNL\Service\AbstractService method</code>), 274	<code>handler</code> (<code>Firstred\PostNL\HttpClient\MockClient property</code>), 205
<code>getTtl()</code> (<code>Firstred\PostNL\Service\ServiceInterface method</code>), 248	<code>handlers</code> (<code>Firstred\PostNL\Util\PendingPromise property</code>), 338
<code>getUpdatedShipments()</code> (<code>Firstred\PostNL\PostNL method</code>), 392	<code>Header</code> (class in <code>Firstred\PostNL\Entity\SOAP</code>), 117
<code>getUpdatedShipmentsREST()</code> (<code>Firstred\PostNL\Service\ShippingStatusService method</code>), 321	<code>Header</code> (<code>Firstred\PostNL\Entity\SOAP\Envelope property</code>), 120
<code>getUpdatedShipmentsREST()</code> (<code>Firstred\PostNL\Service\ShippingStatusServiceInterface method</code>), 267	<code>headers</code> (<code>Firstred\PostNL\Exception\ApiConnectionException property</code>), 177
<code>getVerify()</code> (<code>Firstred\PostNL\HttpClient\BaseHttpClient method</code>), 194	<code>Height</code> (<code>Firstred\PostNL\Entity\Dimension property</code>), 146
<code>getVerify()</code> (<code>Firstred\PostNL\HttpClient\ClientInterface method</code>), 191	<code>HouseNr</code> (<code>Firstred\PostNL\Entity\Address property</code>), 140
<code>getVerify()</code> (<code>Firstred\PostNL\HttpClient\HTTPPlugClient method</code>), 199	<code>HouseNr</code> (<code>Firstred\PostNL\Entity\Location property</code>), 149
<code>GlobalPackBarcodeType</code> (<code>Firstred\PostNL\Entity\Customer property</code>), 142	<code>HouseNr</code> (<code>Firstred\PostNL\Entity\Request\GetDeliveryDate property</code>), 74
<code>GlobalPackCustomerCode</code> (<code>Firstred\PostNL\Entity\Customer property</code>), 142	<code>HouseNr</code> (<code>Firstred\PostNL\Entity\Request\GetSentDate property</code>), 52
<code>Group</code> (class in <code>Firstred\PostNL\Entity</code>), 138	<code>HouseNr</code> (<code>Firstred\PostNL\Entity\Response\ResponseAddress property</code>), 106
<code>GroupCount</code> (<code>Firstred\PostNL\Entity\Group property</code>), 138	<code>HouseNr</code> (<code>Firstred\PostNL\Entity\Timeframe property</code>), 162
<code>GroupCount</code> (<code>Firstred\PostNL\Entity\Response\ResponseGroup property</code>), 90	<code>HouseNrExt</code> (<code>Firstred\PostNL\Entity\Address property</code>), 140
<code>Groups</code> (<code>Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment property</code>), 87	<code>HouseNrExt</code> (<code>Firstred\PostNL\Entity\Location property</code>), 149
<code>Groups</code> (<code>Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment property</code>), 109	<code>HouseNrExt</code> (<code>Firstred\PostNL\Entity\Request\GetDeliveryDate property</code>), 74
<code>Groups</code> (<code>Firstred\PostNL\Entity\Shipment property</code>), 154	<code>HouseNrExt</code> (<code>Firstred\PostNL\Entity\Request\GetSentDate property</code>), 52
<code>GroupSequence</code> (<code>Firstred\PostNL\Entity\Group property</code>), 138	<code>HouseNrExt</code> (<code>Firstred\PostNL\Entity\Response\ResponseAddress property</code>), 107
<code>GroupSequence</code> (<code>Firstred\PostNL\Entity\Response\ResponseGroup property</code>), 90	<code>HouseNrExt</code> (<code>Firstred\PostNL\Entity\Timeframe property</code>), 162
<code>GroupType</code> (<code>Firstred\PostNL\Entity\Group property</code>), 138	<code>HouseNumber</code> (<code>Firstred\PostNL\Entity>StatusAddress property</code>), 123
<code>GroupType</code> (<code>Firstred\PostNL\Entity\Response\ResponseGroup property</code>), 90	<code>HouseNumberSuffix</code> (<code>Firstred\PostNL\Entity>StatusAddress property</code>), 123
<code>GuzzleClient</code> (class in <code>Firstred\PostNL\HttpClient</code>), 207	<code>HSTariffNr</code> (<code>Firstred\PostNL\Entity\Content property</code>), 170
<code>GuzzleRequestFactory</code> (class in <code>Firstred\PostNL\Factory</code>), 188	<code>HttpClient</code> (<code>Firstred\PostNL\PostNL property</code>), 359
	<code>HttpClientException</code> (class in <code>Firstred\PostNL\Exception</code>), 182
	<code>HTTPPlugClient</code> (class in <code>Firstred\PostNL\HttpClient</code>), 197

I

IBAN (*Firstred\PostNL\Entity\Amount* property), **145**

IBAN (*Firstred\PostNL\Entity\Response\ResponseAmount* property), **103**

id (*Firstred\PostNL\Entity\AbstractEntity* property), **132**

IDExpiration (*Firstred\PostNL\Entity\Shipment* property), **154**

IDNumber (*Firstred\PostNL\Entity\Shipment* property), **154**

IDType (*Firstred\PostNL\Entity\Shipment* property), **154**

ImporterReferenceCode (*Firstred\PostNL\Entity\Customs* property), **166**

info() (*Firstred\PostNL\Util\DummyLogger* method), **353**

inspect() (*Firstred\PostNL\Util\PromiseTool* method), **343**

inspectAll() (*Firstred\PostNL\Util\PromiseTool* method), **343**

instance (*Firstred\PostNL\HttpClient\CurlClient* property), **200**

instance (*Firstred\PostNL\HttpClient\GuzzleClient* property), **207**

instance (*Firstred\PostNL\HttpClient\HTTPPlugClient* property), **198**

instance (*Firstred\PostNL\HttpClient\MockClient* property), **205**

instance (*Firstred\PostNL\HttpClient\SymfonyHttpClient* property), **202**

insuranceProductCodes (*Firstred\PostNL\Service\LabellingService* property), **325**

Interval (*Firstred\PostNL\Entity\Timeframe* property), **163**

InvalidApiModeException (class in *Firstred\PostNL\Exception*), **178**

InvalidArgumentException (class in *Firstred\PostNL\Exception*), **182**

InvalidBarcodeException (class in *Firstred\PostNL\Exception*), **180**

InvalidConfigurationException (class in *Firstred\PostNL\Exception*), **183**

InvalidMessageTimeStampException (class in *Firstred\PostNL\Exception*), **178**

InvalidMethodException (class in *Firstred\PostNL\Exception*), **179**

Invoice (*Firstred\PostNL\Entity\Customs* property), **165**

InvoiceNr (*Firstred\PostNL\Entity\Customs* property), **165**

invokeWaitFn() (*Firstred\PostNL\Util\PendingPromise* method), **340**

invokeWaitList() (*Firstred\PostNL\Util\PendingPromise* method), **340**

isEmpty() (*Firstred\PostNL\Util\TaskQueue* method), **347**

isFulfilled() (*Firstred\PostNL\Util\PromiseTool* method), **346**

isRejected() (*Firstred\PostNL\Util\PromiseTool* method), **346**

isSettled() (*Firstred\PostNL\Util\PromiseTool* method), **346**

iterable (*Firstred\PostNL\Util\EachPromise* property), **349**

iterFor() (*Firstred\PostNL\Util\PromiseTool* method), **342**

J

jsonBody (*Firstred\PostNL\Exception\ApiConnectionException* property), **177**

jsonDeserialize() (*Firstred\PostNL\Entity\AbstractEntity* method), **133**

jsonDeserialize() (*Firstred\PostNL\Entity\OpeningHours* method), **172**

jsonDeserialize() (*Firstred\PostNL\Entity\ProductOption* method), **152**

jsonDeserialize() (*Firstred\PostNL\Entity\ReasonNoTimeframe* method), **128**

jsonDeserialize() (*Firstred\PostNL\Entity\Response\CompleteStatusK* method), **95**

jsonDeserialize() (*Firstred\PostNL\Entity\Response\CompleteStatusK* method), **89**

jsonDeserialize() (*Firstred\PostNL\Entity\Response\CurrentStatusRe* method), **111**

jsonDeserialize() (*Firstred\PostNL\Entity\Response\GetDeliveryDate* method), **114**

jsonDeserialize() (*Firstred\PostNL\Entity\Response\GetNearestLoca* method), **80**

jsonDeserialize() (*Firstred\PostNL\Entity\Response\ResponseLocatio* method), **97**

jsonDeserialize() (*Firstred\PostNL\Entity\TimeframeTimeFrame* method), **168**

jsonDeserialize() (*Firstred\PostNL\Entity\Warning* method), **126**

jsonSerialize() (*Firstred\PostNL\Entity\AbstractEntity* method), **133**

jsonSerialize() (*Firstred\PostNL\Entity\Request\Confirming* method), **73**

jsonSerialize() (*Firstred\PostNL\Entity\Request\GenerateLabel* method), **70**

jsonSerialize() (*Firstred\PostNL\Entity\Request\SendShipment* method), **71**

jsonSerialize() (*Firstred\PostNL\Entity\Response\GetLocationsInAre* method), **92**

jsonSerialize() (*Firstred\PostNL\Entity\Response\GetNearestLocation* method), **80**

jsonSerialize() (*Firstred\PostNL\Entity\Response\ResponseTimefram* method), **85**

jsonSerialize() (*Firstred\PostNL\Entity\Timeframe* method), **164**

jsonSerialize() (*Firstred\PostNL\Entity\Timeframes* method), **137**

K

key() (*Firstred\PostNL\Entity\OpeningHours* method), [174](#)

L

Label (class in *Firstred\PostNL\Entity*), [134](#)

LabellingMessage (class in *Firstred\PostNL\Entity\Message*), [45](#)

LabellingService (class in *Firstred\PostNL\Service*), [324](#)

labellingService (*Firstred\PostNL\PostNL* property), [359](#)

LabellingServiceInterface (interface in *Firstred\PostNL\Service*), [220](#)

Labels (*Firstred\PostNL\Entity\Response\MergedLabel* property), [98](#)

Labels (*Firstred\PostNL\Entity\Response\ResponseShipment* property), [81](#)

LabelSignature (*Firstred\PostNL\Entity\Request\GenerateLabel* property), [70](#)

Labeltype (*Firstred\PostNL\Entity\Label* property), [135](#)

LastName (*Firstred\PostNL\Entity>StatusAddress* property), [123](#)

Latitude (*Firstred\PostNL\Entity\Coordinates* property), [143](#)

Latitude (*Firstred\PostNL\Entity\CoordinatesNorthWest* property), [168](#)

Latitude (*Firstred\PostNL\Entity\CoordinatesSouthEast* property), [121](#)

Latitude (*Firstred\PostNL\Entity\Response\ResponseLocation* property), [95](#)

Length (*Firstred\PostNL\Entity\Dimension* property), [146](#)

License (*Firstred\PostNL\Entity\Customs* property), [165](#)

LicenseNr (*Firstred\PostNL\Entity\Customs* property), [165](#)

Location (class in *Firstred\PostNL\Entity*), [148](#)

Location (*Firstred\PostNL\Entity\Request\GetLocationsHere* property), [54](#)

Location (*Firstred\PostNL\Entity\Request\GetNearestLocations* property), [58](#)

LocationCode (*Firstred\PostNL\Entity\Location* property), [149](#)

LocationCode (*Firstred\PostNL\Entity\Request\GetLocations* property), [48](#)

LocationCode (*Firstred\PostNL\Entity\Response\CompleteStatusResponse* property), [83](#)

LocationCode (*Firstred\PostNL\Entity\Response\ResponseShipment* property), [96](#)

LocationService (class in *Firstred\PostNL\Service*), [275](#)

locationService (*Firstred\PostNL\PostNL* property), [359](#)

LocationServiceInterface (interface in *Firstred\PostNL\Service*), [234](#)

log() (*Firstred\PostNL\Util\DummyLogger* method), [354](#)

logger (*Firstred\PostNL\HttpClient\BaseHttpClient* property), [193](#)

logger (*Firstred\PostNL\PostNL* property), [359](#)

Longitude (*Firstred\PostNL\Entity\Coordinates* property), [143](#)

Longitude (*Firstred\PostNL\Entity\CoordinatesNorthWest* property), [168](#)

Longitude (*Firstred\PostNL\Entity\CoordinatesSouthEast* property), [121](#)

Longitude (*Firstred\PostNL\Entity\Response\ResponseLocation* property), [95](#)

M

MainBarcode (*Firstred\PostNL\Entity\Group* property), [138](#)

MainBarcode (*Firstred\PostNL\Entity\Response\CompleteStatusResponse* property), [87](#)

MainBarcode (*Firstred\PostNL\Entity\Response\CurrentStatusResponse* property), [109](#)

MainBarcode (*Firstred\PostNL\Entity\Response\ResponseGroup* property), [91](#)

maxRetries (*Firstred\PostNL\HttpClient\BaseHttpClient* property), [193](#)

MergedLabel (class in *Firstred\PostNL\Entity\Response*), [98](#)

MergedLabels (*Firstred\PostNL\Entity\Response\GenerateLabelResponse* property), [105](#)

MergedLabels (*Firstred\PostNL\Entity\Response\SendShipmentResponse* property), [114](#)

Message (class in *Firstred\PostNL\Entity\Message*), [46](#)

Message (class in *Firstred\PostNL\Util*), [354](#)

Message (*Firstred\PostNL\Entity\Request\CompleteStatus* property), [61](#)

Message (*Firstred\PostNL\Entity\Request\CompleteStatusByPhase* property), [68](#)

Message (*Firstred\PostNL\Entity\Request\CompleteStatusByReference* property), [59](#)

Message (*Firstred\PostNL\Entity\Request\CompleteStatusByStatus* property), [49](#)

Message (*Firstred\PostNL\Entity\Request\Confirming* property), [72](#)

Message (*Firstred\PostNL\Entity\Request\CurrentStatus* property), [67](#)

Message (*Firstred\PostNL\Entity\Request\CurrentStatusByPhase* property), [55](#)

Message (*Firstred\PostNL\Entity\Request\CurrentStatusByReference* property), [64](#)

Message (*Firstred\PostNL\Entity\Request\CurrentStatusByStatus* property), [56](#)

Message (*Firstred\PostNL\Entity\Request\GenerateBarcode* property), [66](#)

Message (*Firstred\PostNL\Entity\Request\GenerateLabel* property), [70](#)

Message (*Firstred\PostNL\Entity\Request\GetDeliveryDate* property), [74](#)

- Message (*Firstred\PostNL\Entity\Request\GetLocation property*), [48](#)
- Message (*Firstred\PostNL\Entity\Request\GetLocationsInArea property*), [54](#)
- Message (*Firstred\PostNL\Entity\Request\GetNearestLocations property*), [58](#)
- Message (*Firstred\PostNL\Entity\Request\GetSentDateRequest property*), [77](#)
- Message (*Firstred\PostNL\Entity\Request\GetSignature property*), [50](#)
- Message (*Firstred\PostNL\Entity\Request\GetTimeframes property*), [62](#)
- Message (*Firstred\PostNL\Entity\Request\SendShipment property*), [71](#)
- MessageID (*Firstred\PostNL\Entity\Message\Message property*), [46](#)
- messages (*Firstred\PostNL\Exception\CifException property*), [181](#)
- MessageTimeStamp (*Firstred\PostNL\Entity\Message\Message property*), [46](#)
- MockClient (*class in Firstred\PostNL\HttpClient*), [205](#)
- mode (*Firstred\PostNL\PostNL property*), [359](#)
- Monday (*Firstred\PostNL\Entity\OpeningHours property*), [172](#)
- mutex (*Firstred\PostNL\Util\EachPromise property*), [349](#)
- ## N
- Name (*Firstred\PostNL\Entity\Address property*), [140](#)
- Name (*Firstred\PostNL\Entity\Customer property*), [142](#)
- Name (*Firstred\PostNL\Entity\Response\ResponseAddress property*), [107](#)
- Name (*Firstred\PostNL\Entity\Response\ResponseLocation property*), [96](#)
- namespaces (*Firstred\PostNL\Service\AbstractService property*), [271](#)
- namespaces (*Firstred\PostNL\Service\BarcodeService property*), [292](#)
- namespaces (*Firstred\PostNL\Service\ConfirmingService property*), [331](#)
- namespaces (*Firstred\PostNL\Service\DeliveryDateService property*), [298](#)
- namespaces (*Firstred\PostNL\Service\LabellingService property*), [325](#)
- namespaces (*Firstred\PostNL\Service\LocationService property*), [276](#)
- namespaces (*Firstred\PostNL\Service\TimeframeService property*), [307](#)
- next() (*Firstred\PostNL\Entity\OpeningHours method*), [173](#)
- NotFoundException (*class in Firstred\PostNL\Exception*), [184](#)
- notice() (*Firstred\PostNL\Util\DummyLogger method*), [353](#)
- NotImplementedException (*class in Firstred\PostNL\Exception*), [183](#)
- NotSupportedException (*class in Firstred\PostNL\Exception*), [178](#)
- offsetExists() (*Firstred\PostNL\Entity\OpeningHours method*), [173](#)
- offsetGet() (*Firstred\PostNL\Entity\OpeningHours method*), [173](#)
- offsetSet() (*Firstred\PostNL\Entity\OpeningHours method*), [173](#)
- offsetUnset() (*Firstred\PostNL\Entity\OpeningHours method*), [173](#)
- OldStatus (*class in Firstred\PostNL\Entity*), [121](#)
- OldStatuses (*Firstred\PostNL\Entity\Response\CompleteStatusResponse property*), [87](#)
- OldStatuses (*Firstred\PostNL\Entity\Shipment property*), [154](#)
- onFulfilled (*Firstred\PostNL\Util\EachPromise property*), [349](#)
- onRejected (*Firstred\PostNL\Util\EachPromise property*), [349](#)
- OpeningHours (*class in Firstred\PostNL\Entity*), [171](#)
- OpeningHours (*Firstred\PostNL\Entity\Response\ResponseLocation property*), [96](#)
- OpeningTime (*Firstred\PostNL\Entity\Location property*), [148](#)
- Option (*Firstred\PostNL\Entity\ProductOption property*), [152](#)
- Options (*Firstred\PostNL\Entity\Location property*), [148](#)
- Options (*Firstred\PostNL\Entity\ReasonNoTimeframe property*), [127](#)
- Options (*Firstred\PostNL\Entity\Request\GetDeliveryDate property*), [74](#)
- Options (*Firstred\PostNL\Entity\Request\GetSentDate property*), [52](#)
- Options (*Firstred\PostNL\Entity\Response\GetDeliveryDateResponse property*), [113](#)
- Options (*Firstred\PostNL\Entity\Response\GetSentDateResponse property*), [99](#)
- Options (*Firstred\PostNL\Entity\Timeframe property*), [162](#)
- Options (*Firstred\PostNL\Entity\TimeframeTimeFrame property*), [167](#)
- OriginCountryCode (*Firstred\PostNL\Entity\Request\GetDeliveryDate property*), [74](#)
- other (*Firstred\PostNL\Entity\Address property*), [140](#)
- other (*Firstred\PostNL\Entity\Response\ResponseAddress property*), [107](#)
- other (*Firstred\PostNL\Entity>StatusAddress property*), [124](#)
- otherwise() (*Firstred\PostNL\Util\PendingPromise method*), [339](#)
- OutputType (*Firstred\PostNL\Entity\Label property*), [135](#)
- ## P
- parseMessage() (*Firstred\PostNL\Util\Message method*), [355](#)
- parseResponse() (*Firstred\PostNL\Util\Message method*), [354](#)

PartnerName (Firstred\PostNL\Entity\Response\ResponseLocation property), 96	processCurrentStatusResponseREST() (Firstred\PostNL\Service\ShippingStatusService method), 319
Password (Firstred\PostNL\Entity\SOAP\UsernameToken property), 118	processCurrentStatusResponseREST() (Firstred\PostNL\Service\ShippingStatusServiceInterface method), 264
pending (Firstred\PostNL\Util\EachPromise property), 349	processGenerateBarcodeResponseREST() (Firstred\PostNL\Service\BarcodeService method), 296
PendingPromise (class in Firstred\PostNL\Util), 338	processGenerateBarcodeResponseREST() (Firstred\PostNL\Service\BarcodeServiceInterface method), 252
pendingRequests (Firstred\PostNL\HttpClient\BaseHttpClient property), 193	processGenerateBarcodeResponseSOAP() (Firstred\PostNL\Service\BarcodeService method), 296
PhaseCode (Firstred\PostNL\Entity\Response\CompleteStatus property), 115	processGenerateBarcodeResponseSOAP() (Firstred\PostNL\Service\BarcodeServiceInterface method), 253
PhaseCode (Firstred\PostNL\Entity\Shipment property), 154	processGenerateLabelResponseREST() (Firstred\PostNL\Service\LabellingService method), 328
PhaseCode (Firstred\PostNL\Entity>Status property), 158	processGenerateLabelResponseREST() (Firstred\PostNL\Service\LabellingServiceInterface method), 224
PhaseDescription (Firstred\PostNL\Entity\Response\CompleteStatus property), 115	processGenerateLabelResponseSOAP() (Firstred\PostNL\Service\LabellingService method), 329
PhaseDescription (Firstred\PostNL\Entity>Status property), 158	processGenerateLabelResponseSOAP() (Firstred\PostNL\Service\LabellingServiceInterface method), 225
PhoneNumber (Firstred\PostNL\Entity\Response\ResponseLocation property), 96	processGetDeliveryDateResponseREST() (Firstred\PostNL\Service\DeliveryDateService method), 303
Postalcode (Firstred\PostNL\Entity\Location property), 149	processGetDeliveryDateResponseREST() (Firstred\PostNL\Service\DeliveryDateServiceInterface method), 231
PostalCode (Firstred\PostNL\Entity\Request\GetDeliveryDate property), 74	processGetDeliveryDateResponseSOAP() (Firstred\PostNL\Service\DeliveryDateService method), 304
PostalCode (Firstred\PostNL\Entity\Request\GetSentDate property), 52	processGetDeliveryDateResponseSOAP() (Firstred\PostNL\Service\DeliveryDateServiceInterface method), 232
PostalCode (Firstred\PostNL\Entity\Timeframe property), 162	processGetLocationResponseREST() (Firstred\PostNL\Service\LocationService method), 287
PostNL (class in Firstred\PostNL), 355	processGetLocationResponseREST() (Firstred\PostNL\Service\LocationServiceInterface method), 245
postnl (Firstred\PostNL\Service\AbstractService property), 271	processGetLocationResponseSOAP() (Firstred\PostNL\Service\LocationService method), 287
postnl (Firstred\PostNL\Service\BarcodeService property), 292	processGetLocationResponseSOAP() (Firstred\PostNL\Service\LocationServiceInterface method), 246
PostNLException (class in Firstred\PostNL\Exception), 182	processGetLocationsInAreaResponseREST() (Firstred\PostNL\Service\LocationService method), 285
prepareRequest() (Firstred\PostNL\HttpClient\CurlClient method), 201	processGetLocationsInAreaResponseREST() (Firstred\PostNL\Service\LocationServiceInterface method), 219
Printertype (Firstred\PostNL\Entity\Message\LabellingMessage property), 46	
processCompleteStatusResponseREST() (Firstred\PostNL\Service\ShippingStatusService method), 320	
processCompleteStatusResponseREST() (Firstred\PostNL\Service\ShippingStatusServiceInterface method), 265	
processConfirmResponseREST() (Firstred\PostNL\Service\ConfirmingService method), 335	
processConfirmResponseREST() (Firstred\PostNL\Service\ConfirmingServiceInterface method), 218	
processConfirmResponseSOAP() (Firstred\PostNL\Service\ConfirmingService method), 336	
processConfirmResponseSOAP() (Firstred\PostNL\Service\ConfirmingServiceInterface method), 219	

(*Firstred\PostNL\Service\LocationServiceInterface* method), **244**

`processGetLocationsInAreaResponseSOAP()` (*Firstred\PostNL\Service\LocationServiceInterface* method), **286**

`processGetLocationsInAreaResponseSOAP()` (*Firstred\PostNL\Service\LocationServiceInterface* method), **244**

`processGetNearestLocationsResponseREST()` (*Firstred\PostNL\Service\LocationServiceInterface* method), **283**

`processGetNearestLocationsResponseREST()` (*Firstred\PostNL\Service\LocationServiceInterface* method), **242**

`processGetNearestLocationsResponseSOAP()` (*Firstred\PostNL\Service\LocationServiceInterface* method), **284**

`processGetNearestLocationsResponseSOAP()` (*Firstred\PostNL\Service\LocationServiceInterface* method), **243**

`processGetSentDateResponseREST()` (*Firstred\PostNL\Service\DeliveryDateServiceInterface* method), **304**

`processGetSentDateResponseREST()` (*Firstred\PostNL\Service\DeliveryDateServiceInterface* method), **233**

`processGetSentDateResponseSOAP()` (*Firstred\PostNL\Service\DeliveryDateServiceInterface* method), **305**

`processGetSentDateResponseSOAP()` (*Firstred\PostNL\Service\DeliveryDateServiceInterface* method), **233**

`processGetSignatureResponseREST()` (*Firstred\PostNL\Service\ShippingStatusServiceInterface* method), **321**

`processGetSignatureResponseREST()` (*Firstred\PostNL\Service\ShippingStatusServiceInterface* method), **266**

`processGetTimeframesResponseREST()` (*Firstred\PostNL\Service\TimeframeServiceInterface* method), **309**

`processGetTimeframesResponseREST()` (*Firstred\PostNL\Service\TimeframeServiceInterface* method), **212**

`processGetTimeframesResponseSOAP()` (*Firstred\PostNL\Service\TimeframeServiceInterface* method), **310**

`processGetTimeframesResponseSOAP()` (*Firstred\PostNL\Service\TimeframeServiceInterface* method), **213**

`processGetUpdatedShipmentsResponseREST()` (*Firstred\PostNL\Service\ShippingStatusServiceInterface* method), **323**

`processGetUpdatedShipmentsResponseREST()` (*Firstred\PostNL\Service\ShippingStatusServiceInterface* method), **269**

`processSendShipmentResponseREST()` (*Firstred\PostNL\Service\ShippingServiceInterface* method), **290**

`processSendShipmentResponseREST()` (*Firstred\PostNL\Service\ShippingServiceInterface* method), **256**

`ProductCode` (*Firstred\PostNL\Entity\Response\CompleteStatusResponse* property), **87**

`ProductCode` (*Firstred\PostNL\Entity\Response\CurrentStatusResponse* property), **109**

`ProductCodeCollect` (*Firstred\PostNL\Entity\Shipment* property), **154**

`ProductCodeDelivery` (*Firstred\PostNL\Entity\Response\ResponseShipment* property), **81**

`ProductCodeDelivery` (*Firstred\PostNL\Entity\Shipment* property), **155**

`ProductDescription` (*Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment* property), **87**

`ProductDescription` (*Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment* property), **109**

`ProductOption` (class in *Firstred\PostNL\Entity*), **151**

`ProductOptions` (*Firstred\PostNL\Entity\Response\CompleteStatusResponse* property), **87**

`ProductOptions` (*Firstred\PostNL\Entity\Response\CurrentStatusResponse* property), **109**

`ProductOptions` (*Firstred\PostNL\Entity\Shipment* property), **155**

`promise()` (*Firstred\PostNL\Util\EachPromise* method), **350**

`promiseFor()` (*Firstred\PostNL\Util\PromiseTool* method), **342**

`PromiseTool` (class in *Firstred\PostNL\Util*), **341**

Q

`Quantity` (*Firstred\PostNL\Entity\Content* property), **170**

`queue` (*Firstred\PostNL\Util\TaskQueue* property), **347**

`queue()` (*Firstred\PostNL\Util\PromiseTool* method), **341**

R

`Range` (*Firstred\PostNL\Entity\Barcode* property), **147**

`reason` (*Firstred\PostNL\Exception\PromiseRejectionException* property), **175**

`ReasonNoTimeframe` (class in *Firstred\PostNL\Entity*), **126**

`ReasonNoTimeframes` (*Firstred\PostNL\Entity\Response\ResponseTimeframes* property), **85**

`ReceiverDateOfBirth` (*Firstred\PostNL\Entity\Shipment* property), **155**

`Reference` (*Firstred\PostNL\Entity\Amount* property), **145**

Reference (Firstred\PostNL\Entity\Response\CompleteStatusResponse\Shipment property), [87](#)

Reference (Firstred\PostNL\Entity\Response\CurrentStatusResponse\Shipment property), [109](#)

Reference (Firstred\PostNL\Entity\Response\ResponseAmount Firstred\PostNL\Entity\Response), [103](#)

Reference (Firstred\PostNL\Entity\Shipment property), [155](#)

ReferenceCollect (Firstred\PostNL\Entity\Shipment property), [155](#)

refillPending() (Firstred\PostNL\Util\EachPromise method), [350](#)

Region (Firstred\PostNL\Entity\Address property), [140](#)

Region (Firstred\PostNL\Entity\Response\ResponseAddress property), [107](#)

Region (Firstred\PostNL\Entity>StatusAddress property), [124](#)

registerNamespaces() (Firstred\PostNL\Service\AbstractService method), [272](#)

RegistrationDate (Firstred\PostNL\Entity>StatusAddress property), [124](#)

reject() (Firstred\PostNL\Util\PendingPromise method), [339](#)

RejectionException (class in Firstred\PostNL\Exception\Promise), [175](#)

rejectionFor() (Firstred\PostNL\Util\PromiseTool method), [342](#)

Remark (Firstred\PostNL\Entity\Address property), [140](#)

Remark (Firstred\PostNL\Entity\Response\ResponseAddress property), [107](#)

Remark (Firstred\PostNL\Entity\Shipment property), [155](#)

Remark (Firstred\PostNL\Entity>StatusAddress property), [124](#)

removeCachedItem() (Firstred\PostNL\Service\AbstractService method), [274](#)

removeCachedItem() (Firstred\PostNL\Service\ServiceInterface method), [248](#)

removeRequest() (Firstred\PostNL\HttpClient\BaseHttpClient method), [195](#)

removeRequest() (Firstred\PostNL\HttpClient\ClientInterface method), [191](#)

requestFactory (Firstred\PostNL\HttpClient\BaseHttpClient property), [193](#)

requestFactory (Firstred\PostNL\PostNL property), [359](#)

RequestFactoryInterface (interface in Firstred\PostNL\Factory), [186](#)

resetLogger() (Firstred\PostNL\PostNL method), [362](#)

resolve() (Firstred\PostNL\Util\PendingPromise method), [339](#)

response (Firstred\PostNL\Exception\HttpClientException property), [183](#)

response (Firstred\PostNL\Exception\ResponseException property), [179](#)

ResponseAddress (class in Firstred\PostNL\Entity\Response), [105](#)

ResponseAmount (class in Firstred\PostNL\Entity\Response), [103](#)

ResponseAmountType (Firstred\PostNL\Entity\Response\ResponseAmount property), [103](#)

ResponseException (class in Firstred\PostNL\Exception), [179](#)

responseFactory (Firstred\PostNL\HttpClient\BaseHttpClient property), [193](#)

responseFactory (Firstred\PostNL\PostNL property), [359](#)

ResponseFactoryInterface (interface in Firstred\PostNL\Factory), [186](#)

ResponseGroup (class in Firstred\PostNL\Entity\Response), [90](#)

ResponseLocation (class in Firstred\PostNL\Entity\Response), [95](#)

ResponseLocation (Firstred\PostNL\Entity\Response\GetLocationsResponse property), [78](#)

ResponseShipment (class in Firstred\PostNL\Entity\Response), [81](#)

ResponseShipments (Firstred\PostNL\Entity\Response\GenerateLabelResponse property), [105](#)

ResponseShipments (Firstred\PostNL\Entity\Response\SendShipmentResponse property), [114](#)

ResponseTimeframes (class in Firstred\PostNL\Entity\Response), [85](#)

result (Firstred\PostNL\Util\PendingPromise property), [338](#)

RetailNetworkID (Firstred\PostNL\Entity\Location property), [149](#)

RetailNetworkID (Firstred\PostNL\Entity\Request\GetLocation property), [48](#)

RetailNetworkID (Firstred\PostNL\Entity\Response\ResponseLocation property), [96](#)

retrieveCachedItem() (Firstred\PostNL\Service\AbstractService method), [273](#)

retrieveCachedItem() (Firstred\PostNL\Service\ServiceInterface method), [247](#)

ReturnBarcode (Firstred\PostNL\Entity\Shipment property), [155](#)

ReturnReference (Firstred\PostNL\Entity\Shipment property), [155](#)

rewind() (Firstred\PostNL\Entity\OpeningHours method), [174](#)

RFPdi (class in Firstred\PostNL\Util), [348](#)

rotate() (Firstred\PostNL\Util\RFPdi method), [348](#)

rotateClockWise() (Firstred\PostNL\Util\RFPdi method), [348](#)

rotateCounterClockWise() (Firstred\PostNL\Util\RFPdi method), [348](#)

RouteCode (Firstred\PostNL\Entity\Response\CompleteStatusResponse property), [179](#)

property), [83](#)

`RouteName` (*Firstred\PostNL\Entity\Response\CompleteStatusResponse* property), [83](#)

`run()` (*Firstred\PostNL\Util\TaskQueue* method), [347](#)

S

`Saleschannel` (*Firstred\PostNL\Entity\Location* property), [149](#)

`Saleschannel` (*Firstred\PostNL\Entity\Response\ResponseLocation* property), [96](#)

`sandbox` (*Firstred\PostNL\PostNL* property), [358](#)

`Saturday` (*Firstred\PostNL\Entity\OpeningHours* property), [172](#)

`Security` (class in *Firstred\PostNL\Entity\SOAP*), [118](#)

`SendShipment` (class in *Firstred\PostNL\Entity\Request*), [71](#)

`sendShipment()` (*Firstred\PostNL\PostNL* method), [370](#)

`SendShipmentResponse` (class in *Firstred\PostNL\Entity\Response*), [114](#)

`sendShipmentRest()` (*Firstred\PostNL\Service\ShippingService* method), [289](#)

`sendShipmentRest()` (*Firstred\PostNL\Service\ShippingServiceInterface* method), [254](#)

`sendShipments()` (*Firstred\PostNL\PostNL* method), [372](#)

`SentDate` (*Firstred\PostNL\Entity\Response\GetSentDateResponse* property), [99](#)

`Serie` (*Firstred\PostNL\Entity\Barcode* property), [147](#)

`ServiceInterface` (interface in *Firstred\PostNL\Service*), [247](#)

`setAddressType()` (*Firstred\PostNL\Entity\Address* method), [141](#)

`setAddressType()` (*Firstred\PostNL\Entity>StatusAddress* method), [125](#)

`setAllowSundaySorting()` (*Firstred\PostNL\Entity\Location* method), [151](#)

`setAllowSundaySorting()` (*Firstred\PostNL\Entity\Request\GetDeliveryDate* method), [76](#)

`setAllowSundaySorting()` (*Firstred\PostNL\Entity\Request\GetSentDate* method), [53](#)

`setAmountType()` (*Firstred\PostNL\Entity\Amount* method), [146](#)

`setBarcodeService()` (*Firstred\PostNL\PostNL* method), [364](#)

`setCache()` (*Firstred\PostNL\Service\AbstractService* method), [274](#)

`setCache()` (*Firstred\PostNL\Service\ServiceInterface* method), [248](#)

`setClient()` (*Firstred\PostNL\HttpClient\GuzzleClient* method), [208](#)

`setClient()` (*Firstred\PostNL\HttpClient\HTTPPlugClient* method), [199](#)

`setCollectionTimeStampEnd()` (*Firstred\PostNL\Entity\Shipment* method), [157](#)

`setCollectionTimeStampStart()` (*Firstred\PostNL\Entity\Shipment* method), [157](#)

`setConcurrency()` (*Firstred\PostNL\HttpClient\BaseHttpClient* method), [195](#)

`setConcurrency()` (*Firstred\PostNL\HttpClient\SymfonyHttpClient* method), [203](#)

`setConfirmingService()` (*Firstred\PostNL\PostNL* method), [364](#)

`setConnectTimeout()` (*Firstred\PostNL\HttpClient\BaseHttpClient* method), [194](#)

`setContenttype()` (*Firstred\PostNL\Entity\Label* method), [135](#)

`setCreationDate()` (*Firstred\PostNL\Entity\Response\UpdatedShipment* method), [101](#)

`setCustomer()` (*Firstred\PostNL\PostNL* method), [361](#)

`setDate()` (*Firstred\PostNL\Entity\ReasonNoTimeframe* method), [128](#)

`setDate()` (*Firstred\PostNL\Entity\Timeframe* method), [163](#)

`setDate()` (*Firstred\PostNL\Entity\TimeframeTimeFrame* method), [168](#)

`setDeliveryDate()` (*Firstred\PostNL\Entity\Location* method), [150](#)

`setDeliveryDate()` (*Firstred\PostNL\Entity\Request\GetSentDate* method), [53](#)

`setDeliveryDate()` (*Firstred\PostNL\Entity\Response\CompleteStatusResponse* method), [89](#)

`setDeliveryDate()` (*Firstred\PostNL\Entity\Response\CurrentStatusResponse* method), [111](#)

`setDeliveryDate()` (*Firstred\PostNL\Entity\Response\GetDeliveryDate* method), [113](#)

`setDeliveryDate()` (*Firstred\PostNL\Entity\Shipment* method), [157](#)

`setDeliveryDateService()` (*Firstred\PostNL\PostNL* method), [365](#)

`setDeliveryTimeStampEnd()` (*Firstred\PostNL\Entity\Shipment* method), [157](#)

`setDeliveryTimeStampStart()` (*Firstred\PostNL\Entity\Shipment* method), [157](#)

`setEndDate()` (*Firstred\PostNL\Entity\Timeframe* method), [164](#)

`setETAFrom()` (*Firstred\PostNL\Entity\Expectation* method), [136](#)

`setETATo()` (*Firstred\PostNL\Entity\Expectation* method), [136](#)

`setHandler()` (*Firstred\PostNL\HttpClient\MockClient* method), [206](#)

`setHttpClient()` (*Firstred\PostNL\PostNL* method), [362](#)

`setLabellingService()` (*Firstred\PostNL\PostNL*

method), **364**
setLocationService() (Firstred\PostNL\PostNL method), **366**
setLogger() (Firstred\PostNL\HttpClient\BaseHttpClient method), **194**
setLogger() (Firstred\PostNL\HttpClient\ClientInterface method), **190**
setLogger() (Firstred\PostNL\PostNL method), **362**
setMaxRetries() (Firstred\PostNL\HttpClient\BaseHttpClient method), **194**
setMaxRetries() (Firstred\PostNL\HttpClient\SymfonyHttpClient method), **363**
setMessage() (Firstred\PostNL\Entity\Request\CompleteStatus method), **62**
setMessage() (Firstred\PostNL\Entity\Request\CompleteStatusByRef() method), **60**
setMessage() (Firstred\PostNL\Entity\Request\CurrentStatus method), **68**
setMessage() (Firstred\PostNL\Entity\Request\CurrentStatusByRef() method), **65**
setMessage() (Firstred\PostNL\Entity\Request\GeneratedStatus method), **66**
setMessage() (Firstred\PostNL\Entity\Request\GetDeliveryTime method), **76**
setMessage() (Firstred\PostNL\Entity\Request\GetLocation method), **48**
setMessage() (Firstred\PostNL\Entity\Request\GetNearestLocation method), **58**
setMessage() (Firstred\PostNL\Entity\Request\GetSentDateRequest method), **77**
setMessage() (Firstred\PostNL\Entity\Request\GetSignature method), **51**
setMessage() (Firstred\PostNL\Entity\Request\GetTimeframes method), **63**
setMessageTimeStamp() (Firstred\PostNL\Entity\Message\Message method), **47**
setMode() (Firstred\PostNL\PostNL method), **361**
setOption() (Firstred\PostNL\HttpClient\GuzzleClient method), **208**
setOption() (Firstred\PostNL\HttpClient\MockClient method), **205**
setOption() (Firstred\PostNL\HttpClient\SymfonyHttpClient method), **202**
setPostalcode() (Firstred\PostNL\Entity\Location method), **150**
setPostalCode() (Firstred\PostNL\Entity\Request\GetDeliveryDate method), **75**
setPostalCode() (Firstred\PostNL\Entity\Request\GetSentDate method), **53**
setPostalCode() (Firstred\PostNL\Entity\Timeframe method), **164**
setRegistrationDate() (Firstred\PostNL\Entity>StatusAddress method), **125**
setRequestFactory() (Firstred\PostNL\HttpClient\BaseHttpClient method), **196**
setRequestFactory() (Firstred\PostNL\PostNL method), **363**
setResponse() (Firstred\PostNL\Exception\HttpClientException method), **183**
setResponse() (Firstred\PostNL\Exception\ResponseException method), **180**
setResponseFactory() (Firstred\PostNL\HttpClient\BaseHttpClient method), **196**
setResponseFactory() (Firstred\PostNL\PostNL method), **363**
setSandbox() (Firstred\PostNL\PostNL method), **361**
setSentDate() (Firstred\PostNL\Entity\Response\GetSentDateResponse method), **99**
setService() (Firstred\PostNL\Service\AbstractService method), **272**
setShippingDate() (Firstred\PostNL\Entity\Request\GetDeliveryDate method), **75**
setShippingService() (Firstred\PostNL\PostNL method), **366**
setShippingStatusService() (Firstred\PostNL\PostNL method), **365**
setSignatureDate() (Firstred\PostNL\Entity\Response\GetSignatureResponse method), **102**
setSMSNr() (Firstred\PostNL\Entity>Contact method), **130**
setStartDate() (Firstred\PostNL\Entity\Timeframe method), **164**
setStreamFactory() (Firstred\PostNL\HttpClient\BaseHttpClient method), **197**
setStreamFactory() (Firstred\PostNL\PostNL method), **363**
setSundaySorting() (Firstred\PostNL\Entity\Timeframe method), **164**
setTelNr() (Firstred\PostNL\Entity>Contact method), **130**
setTimeframe() (Firstred\PostNL\Entity\Request\GetTimeframes method), **63**
setTimeframes() (Firstred\PostNL\Entity\Request\GetTimeframes method), **63**
setTimeframeService() (Firstred\PostNL\PostNL method), **366**
setTimeout() (Firstred\PostNL\HttpClient\BaseHttpClient method), **193**
setTimeStamp() (Firstred\PostNL\Entity\Response\CompleteStatusResponse method), **84**
setTimeStamp() (Firstred\PostNL\Entity\Response\CompleteStatusResponse method), **116**
setTimeStamp() (Firstred\PostNL\Entity>Status method), **159**
settle() (Firstred\PostNL\Util\PendingPromise method), **339**
settle() (Firstred\PostNL\Util\PromiseTool method), **344**
setToken() (Firstred\PostNL\PostNL method), **360**

setTtl() (Firstred\PostNL\Service\AbstractService property), **74**
 method), **274**
 setTtl() (Firstred\PostNL\Service\ServiceInterface property), **74**
 method), **248**
 setVerify() (Firstred\PostNL\HttpClient\BaseHttpClient property), **52**
 method), **194**
 setVerify() (Firstred\PostNL\HttpClient\ClientInterface property), **288**
 method), **190**
 setVerify() (Firstred\PostNL\HttpClient\HTTPPlugClient property), **359**
 method), **199**
 setZipcode() (Firstred\PostNL\Entity\Address property), **254**
 method), **141**
 setZipcode() (Firstred\PostNL\Entity\Response\ResponseAddressFirstred\PostNL\Service), **311**
 method), **108**
 setZipcode() (Firstred\PostNL\Entity>StatusAddress property), **359**
 method), **125**
 Shipment (class in Firstred\PostNL\Entity), **152**
 Shipment (Firstred\PostNL\Entity\Request\CompleteStatus property), **61**
 Shipment (Firstred\PostNL\Entity\Request\CompleteStatusByReference property), **69**
 Shipment (Firstred\PostNL\Entity\Request\CompleteStatusByReference property), **59**
 Shipment (Firstred\PostNL\Entity\Request\CompleteStatusByStatus property), **102**
 Shipment (Firstred\PostNL\Entity\Request\CompleteStatusByStatus property), **49**
 Shipment (Firstred\PostNL\Entity\Request\CurrentStatus property), **67**
 Shipment (Firstred\PostNL\Entity\Request\CurrentStatusByPhase Firstred\PostNL\Entity\Response), **79**
 Shipment (Firstred\PostNL\Entity\Request\CurrentStatusByPhase property), **55**
 Shipment (Firstred\PostNL\Entity\Request\CurrentStatusByReference Firstred\PostNL\Util\PromiseTool method), **344**
 Shipment (Firstred\PostNL\Entity\Request\CurrentStatusByReference property), **57**
 Shipment (Firstred\PostNL\Entity\Request\CurrentStatusByReference property), **162**
 Shipment (Firstred\PostNL\Entity\Request\GetSignature state (Firstred\PostNL\Util\PendingPromise property), **338**
 property), **50**
 ShipmentAmount (Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment), **158**
 property), **87**
 ShipmentAmount (Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment), **109**
 property), **109**
 ShipmentCounter (Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment), **109**
 property), **87**
 ShipmentCounter (Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment), **109**
 property), **109**
 ShipmentNotFoundException (class in Firstred\PostNL\Exception), **184**
 ShipmentStatus (Firstred\PostNL\Entity\Request\Confirming property), **72**
 ShipmentStatus (Firstred\PostNL\Entity\Request\GenerateLabel property), **70**
 ShipmentStatus (Firstred\PostNL\Entity\Request\SendShipments property), **71**
 ShipmentStatus (Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment), **115**
 property), **94**
 ShipmentStatus (Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment), **109**
 property), **93**
 ShipmentType (Firstred\PostNL\Entity\Customs property), **166**
 ShippingDate (Firstred\PostNL\Entity\Request\GetDeliveryDate property), **193**
 ShippingDuration (Firstred\PostNL\Entity\Request\GetDeliveryDate property), **74**
 ShippingDuration (Firstred\PostNL\Entity\Request\GetSentDate property), **52**
 ShippingService (class in Firstred\PostNL\Service), **288**
 shippingService (Firstred\PostNL\PostNL property), **359**
 ShippingServiceInterface (interface in Firstred\PostNL\Service), **254**
 ShippingStatusService (class in Firstred\PostNL\Service), **311**
 shippingStatusService (Firstred\PostNL\PostNL property), **359**
 ShippingStatusServiceInterface (interface in Firstred\PostNL\Service), **257**
 shouldBeAnArray() (Firstred\PostNL\Entity\AbstractEntity method), **133**
 Signature (class in Firstred\PostNL\Entity), **144**
 Signature (Firstred\PostNL\Entity\Response\SignatureResponse property), **79**
 SignatureDate (Firstred\PostNL\Entity\Response\GetSignatureResponse property), **102**
 SignatureImage (Firstred\PostNL\Entity\Response\GetSignatureResponse property), **102**
 SignatureResponse (class in Firstred\PostNL\Entity\Response), **79**
 SMSNr (Firstred\PostNL\Entity>Contact property), **130**
 SmsRef (Firstred\PostNL\Util\PromiseTool method), **344**
 SmsDate (Firstred\PostNL\Entity\Timeframe property), **162**
 state (Firstred\PostNL\Util\PendingPromise property), **338**
 Status (Firstred\PostNL\Entity\Request\Confirming property), **72**
 Status (Firstred\PostNL\Entity\Request\GenerateLabel property), **70**
 Status (Firstred\PostNL\Entity\Request\SendShipments property), **71**
 Status (Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment), **158**
 Status (Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment), **109**
 Status (Firstred\PostNL\Entity\Response\UpdatedShipmentsResponse property), **109**
 StatusAddress (class in Firstred\PostNL\Entity), **122**
 StatusCode (Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment), **115**
 StatusCode (Firstred\PostNL\Entity\Shipment property), **154**
 StatusCode (Firstred\PostNL\Entity>Status property), **158**
 StatusDescription (Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment), **115**
 StatusDescription (Firstred\PostNL\Entity>Status property), **158**
 str() (Firstred\PostNL\Util\Message method), **354**
 streamFactory (Firstred\PostNL\HttpClient\BaseHttpClient property), **193**

streamFactory (*Firstred\PostNL\PostNL* property), **359**

StreamFactoryInterface (interface in *Firstred\PostNL\Factory*), **184**

Street (*Firstred\PostNL\Entity\Address* property), **140**

Street (*Firstred\PostNL\Entity\Location* property), **149**

Street (*Firstred\PostNL\Entity\Request\GetDeliveryDate* property), **74**

Street (*Firstred\PostNL\Entity\Request\GetSentDate* property), **52**

Street (*Firstred\PostNL\Entity\Response\ResponseAddress* property), **107**

Street (*Firstred\PostNL\Entity>StatusAddress* property), **124**

Street (*Firstred\PostNL\Entity\Timeframe* property), **163**

StreetHouseNrExt (*Firstred\PostNL\Entity\Address* property), **140**

Sunday (*Firstred\PostNL\Entity\OpeningHours* property), **172**

SundaySorting (*Firstred\PostNL\Entity\Timeframe* property), **163**

Sustainability (class in *Firstred\PostNL\Entity*), **161**

Sustainability (*Firstred\PostNL\Entity\ReasonNoTimeframe* property), **127**

Sustainability (*Firstred\PostNL\Entity\Response\ResponseAddress* property), **96**

Sustainability (*Firstred\PostNL\Entity\TimeframeTimeFrame* property), **167**

SymfonyHttpClient (class in *Firstred\PostNL\HttpClient*), **201**

T

task() (*Firstred\PostNL\Util\PromiseTool* method), **342**

TaskQueue (class in *Firstred\PostNL\Util*), **346**

TelNr (*Firstred\PostNL\Entity>Contact* property), **130**

TerminalType (*Firstred\PostNL\Entity\Location* property), **149**

TerminalType (*Firstred\PostNL\Entity\Response\ResponseLocation* property), **96**

then() (*Firstred\PostNL\Util\PendingPromise* method), **339**

threeSCountries (*Firstred\PostNL\PostNL* property), **358**

Thursday (*Firstred\PostNL\Entity\OpeningHours* property), **172**

Time (*Firstred\PostNL\Entity\CutOffTime* property), **169**

Timeframe (class in *Firstred\PostNL\Entity*), **162**

Timeframe (*Firstred\PostNL\Entity\Request\GetTimeframes* property), **62**

TimeframeRange (*Firstred\PostNL\Entity\Timeframe* property), **163**

Timeframes (class in *Firstred\PostNL\Entity*), **137**

Timeframes (*Firstred\PostNL\Entity\Response\ResponseTimeframes* property), **85**

Timeframes (*Firstred\PostNL\Entity\Timeframe* property), **163**

Timeframes (*Firstred\PostNL\Entity\Timeframes* property), **137**

TimeframeService (class in *Firstred\PostNL\Service*), **306**

timeframeService (*Firstred\PostNL\PostNL* property), **359**

TimeframeServiceInterface (interface in *Firstred\PostNL\Service*), **209**

TimeframeTimeFrame (class in *Firstred\PostNL\Entity*), **167**

TimeframeTimeFrames (*Firstred\PostNL\Entity\Timeframes* property), **137**

timeout (*Firstred\PostNL\HttpClient\BaseHttpClient* property), **193**

TimeStamp (*Firstred\PostNL\Entity\Response\CompleteStatusResponseEntity* property), **83**

TimeStamp (*Firstred\PostNL\Entity\Response\CompleteStatusResponseObject* property), **116**

TimeStamp (*Firstred\PostNL\Entity>Status* property), **158**

TimeStamp (*Firstred\PostNL\Entity\ReasonNoTimeframe* property), **127**

TimeStamp (*Firstred\PostNL\Entity\TimeframeTimeFrame* property), **167**

toArray() (*Firstred\PostNL\Entity\OpeningHours* method), **173**

TransactionCode (*Firstred\PostNL\Entity\Customs* property), **166**

TransactionDescription (*Firstred\PostNL\Entity\Customs* property), **166**

TransactionNumber (*Firstred\PostNL\Entity\Amount* property), **145**

TransactionNumber (*Firstred\PostNL\Entity\Response\ResponseAmount* property), **103**

triggerDeprecation() (*Firstred\PostNL\PostNL* method), **396**

TrustedShipperID (*Firstred\PostNL\Entity\Customs* property), **166**

tTl (*Firstred\PostNL\Service\AbstractService* property), **271**

Tuesday (*Firstred\PostNL\Entity\OpeningHours* property), **172**

Type (*Firstred\PostNL\Entity\Barcode* property), **147**

U

unwrap() (*Firstred\PostNL\Util\PromiseTool* method), **343**

UpdatedShipmentsResponse (class in *Firstred\PostNL\Entity\Response*), **100**

urlencode() (*Firstred\PostNL\Util\Util* method), **351**

Username (*Firstred\PostNL\Entity\SOAP\UsernameToken* property), **118**

UsernameToken (class in Firstred\PostNL\Entity\SOAP), [117](#)
UsernameToken (Firstred\PostNL\Entity\SOAP\Security property), [119](#)
Util (class in Firstred\PostNL\Util), [350](#)
UUID (class in Firstred\PostNL\Util), [340](#)

V

valid() (Firstred\PostNL\Entity\OpeningHours method), [174](#)
validateRESTResponse() (Firstred\PostNL\Service\AbstractService method), [272](#)
validateSOAPResponse() (Firstred\PostNL\Service\AbstractService method), [273](#)
Value (Firstred\PostNL\Entity\Amount property), [145](#)
Value (Firstred\PostNL\Entity\Content property), [170](#)
Value (Firstred\PostNL\Entity\Response\ResponseAmount property), [103](#)
verify (Firstred\PostNL\HttpClient\BaseHttpClient property), [193](#)
verifySslCerts (Firstred\PostNL\PostNL property), [358](#)
VerzekerdBedrag (Firstred\PostNL\Entity\Amount property), [145](#)
VerzekerdBedrag (Firstred\PostNL\Entity\Response\ResponseAmount property), [103](#)
Volume (Firstred\PostNL\Entity\Dimension property), [146](#)

W

wait() (Firstred\PostNL\Util\PendingPromise method), [339](#)
waitFn (Firstred\PostNL\Util\PendingPromise property), [338](#)
waitIfPending() (Firstred\PostNL\Util\PendingPromise method), [340](#)
waitList (Firstred\PostNL\Util\PendingPromise property), [338](#)
Warning (class in Firstred\PostNL\Entity), [125](#)
warning() (Firstred\PostNL\Util\DummyLogger method), [353](#)
Warnings (Firstred\PostNL\Entity\Response\CompleteStatusResponse property), [94](#)
Warnings (Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment property), [87](#)
Warnings (Firstred\PostNL\Entity\Response\ConfirmingResponseShipment property), [112](#)
Warnings (Firstred\PostNL\Entity\Response\CurrentStatusResponse property), [93](#)
Warnings (Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment property), [109](#)
Warnings (Firstred\PostNL\Entity\Response\ResponseLocation property), [96](#)
Warnings (Firstred\PostNL\Entity\Response\ResponseShipment property), [81](#)

in Warnings (Firstred\PostNL\Entity\Signature property), [144](#)
Wednesday (Firstred\PostNL\Entity\OpeningHours property), [172](#)
Weight (Firstred\PostNL\Entity\Content property), [170](#)
Weight (Firstred\PostNL\Entity\Dimension property), [147](#)
Width (Firstred\PostNL\Entity\Dimension property), [147](#)

X

xmlDeserialize() (Firstred\PostNL\Entity\AbstractEntity method), [133](#)
XmlSerializable (interface in Firstred\PostNL\Util), [337](#)
xmlSerialize() (Firstred\PostNL\Entity\AbstractEntity method), [133](#)
xmlSerialize() (Firstred\PostNL\Entity\Amount method), [146](#)
xmlSerialize() (Firstred\PostNL\Entity\CutOffTime method), [169](#)
xmlSerialize() (Firstred\PostNL\Entity\Location method), [151](#)
xmlSerialize() (Firstred\PostNL\Entity\ReasonNoTimeframe method), [128](#)
xmlSerialize() (Firstred\PostNL\Entity\Request\CompleteStatus method), [61](#)
xmlSerialize() (Firstred\PostNL\Entity\Request\CompleteStatusByPhase method), [69](#)
xmlSerialize() (Firstred\PostNL\Entity\Request\CompleteStatusByReference method), [60](#)
xmlSerialize() (Firstred\PostNL\Entity\Request\CompleteStatusByStatus method), [49](#)
xmlSerialize() (Firstred\PostNL\Entity\Request\Confirming method), [72](#)
xmlSerialize() (Firstred\PostNL\Entity\Request\CurrentStatus method), [68](#)
xmlSerialize() (Firstred\PostNL\Entity\Request\CurrentStatusByPhase method), [56](#)
xmlSerialize() (Firstred\PostNL\Entity\Request\CurrentStatusByReference method), [65](#)
xmlSerialize() (Firstred\PostNL\Entity\Request\CurrentStatusByStatus method), [57](#)
xmlSerialize() (Firstred\PostNL\Entity\Request\GenerateLabel method), [70](#)
xmlSerialize() (Firstred\PostNL\Entity\Request\GetDeliveryDate method), [76](#)
xmlSerialize() (Firstred\PostNL\Entity\Request\GetSentDate method), [54](#)
xmlSerialize() (Firstred\PostNL\Entity\Request\GetSignature method), [51](#)
xmlSerialize() (Firstred\PostNL\Entity\Request\GetTimeframes method), [64](#)
xmlSerialize() (Firstred\PostNL\Entity\Response\CompleteStatusResponse method), [95](#)
xmlSerialize() (Firstred\PostNL\Entity\Response\CompleteStatusResponseShipment method), [89](#)

`xmlSerialize()` (*Firstred\PostNL\Entity\Response\CurrentStatusResponse*
method), [93](#)

`xmlSerialize()` (*Firstred\PostNL\Entity\Response\CurrentStatusResponseShipment*
method), [111](#)

`xmlSerialize()` (*Firstred\PostNL\Entity\Response\GetDeliveryDateResponse*
method), [113](#)

`xmlSerialize()` (*Firstred\PostNL\Entity\Response\GetLocationsResult*
method), [78](#)

`xmlSerialize()` (*Firstred\PostNL\Entity\Response\GetSentDateResponse*
method), [99](#)

`xmlSerialize()` (*Firstred\PostNL\Entity\Shipment*
method), [157](#)

`xmlSerialize()` (*Firstred\PostNL\Entity\SOAP\UsernameToken*
method), [118](#)

`xmlSerialize()` (*Firstred\PostNL\Entity\Timeframe*
method), [164](#)

`xmlSerialize()` (*Firstred\PostNL\Util\XmlSerializable*
method), [337](#)

Z

`Zipcode` (*Firstred\PostNL\Entity\Address* property),
[140](#)

`Zipcode` (*Firstred\PostNL\Entity\Response\ResponseAddress*
property), [107](#)

`Zipcode` (*Firstred\PostNL\Entity>StatusAddress* prop-
erty), [124](#)